


BAREBONES



Block
TOWER




BLOCK TOWER POWER STATION

Quick Start Guide

PRODUCT COMPONENTS

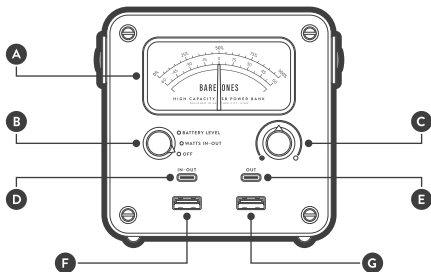

PRODUCT COMPONENTS

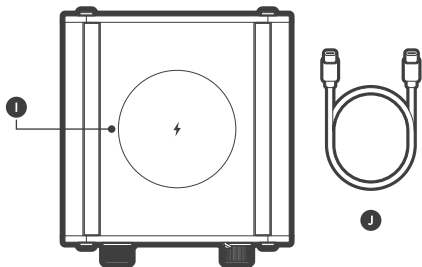

KEY

- A.** Data Display
- B.** Data Display Selector
- C.** Backlight Adjustment Knob
- D.** USB-C Left (*Max in: 100W, Max out: 140W*)
- E.** USB-C Right (*Max out: 60W*)
- F.** USB-A Left (*Max out: 15W Shared*)
- G.** USB-A Right (*Max out: 15W Shared*)
- H.** Ventilation
- I.** Wireless Charging (*Max out: 10W*)
- J.** USB-C Cable (*140W*)

DATA DISPLAY SELECTOR (LEFT KNOB)


OFF

No output from any port or wireless charging pad.

The power bank can be charged when OFF and the display will show current battery level.

BATTERY LEVEL


With blue LED illuminated, indicator displays current battery level as a percentage. (*Blue Arc*)



WATTS IN/OUT

With red LED illuminated, indicator needle displays net sum of both input and output. (*Red Arc*)

Example: If Power Station is being charged (30W input) while also charging a device via USB (10W output), display will show net gain of 20W.




CHARGING

CHARGING VIA USB-C PORT

Insert the charging cable into the top left USB-C port (D) and connect the other end to an external power source to begin charging.

Only the top left USB-C port receives power to charge the power station.

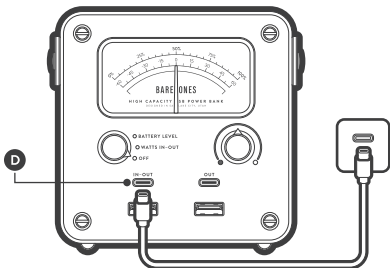

WARNINGS & SAFETY

- Keep away from extreme heat, direct sunlight, or fire.
- Avoid exposure to rain, moisture, or extreme weather.
- Handle with care to prevent scratches, dents, or damage to the brass faceplate and housing.
- Do not use abrasive cleaners or solvents that may harm the surface.
- Avoid placing the power station on uneven surfaces or near edges where it may fall.
- Keep away from children.
- Do not insert foreign objects into outputs or ventilation.
- Regularly inspect the power station for any signs of wear, damage, or unusual behavior. In case of any malfunction or if the power station becomes unusually hot, power it off immediately and contact customer support for assistance.
- Do not attempt to disassemble the power station. Any manipulation to the unit or its components will void all warranties.

Follow these guidelines to ensure the safe and proper use of your power station. Failure to adhere to these warnings may result in damage to the device, injury, or other safety hazards.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.

SPECIFICATIONS



BATTERY CAPACITY	7.8Ah 14.6V 113.88Wh
------------------	----------------------

CHARGE CYCLES	500-700
---------------	---------

USB-A PORTS (Output)	5V=3A, 9V=2A, 12V=1.5A
----------------------	------------------------

USB-C PORTS

- | | |
|-----------------------|--|
| • LEFT PORT (Input) | 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A |
| • LEFT PORT (Output) | 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A, 28V=5A |
| • RIGHT PORT (Output) | 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=3A |

WIRELESS CHARGING	10W MAX
-------------------	---------

DIMENSIONS	4.5" x 4.5" x 4.25" 2 lbs
------------	-----------------------------



BAREBONES

Block
TOWER



SCAN FOR THE FULL GUIDE

Includes:

- Battery Replacement
- Specifications
- Care

BAREBONESLIVING.COM

DESIGNED IN UTAH | MADE IN CHINA



Certified



Corporation

