



**TEST REPORT**  
**IEC 60598-2-21**  
**Part 2: Particular requirements**  
**Section 21: Rope Lights**

**Report Number.** ..... GZES191202976801

**Date of issue** ..... 2020-03-05

**Total number of pages** ..... 38

**Name of Testing Laboratory** ..... SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou  
**preparing the Report**..... Branch

**Applicant's name**..... Glamor Optoelectronics Technology Co., Ltd

**Address** ..... 3, Guangfeng Industrial Park, West District, Zhongshan,  
Guangdong, China

**Test specification:**

**Standard** ..... IEC 60598-2-21:2014 (First Edition) used in conjunction with  
IEC 60598-1:2014 (Eighth Edition)

**Test procedure** ..... SGS-CSTC / CE\_LVD

**Non-standard test method** ..... N/A

**Test Report Form No.**..... IEC60598\_2\_21A

**Test Report Form(s) Originator** .... DEKRA Certification B.V.

**Master TRF** ..... 2016-01

**Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.



If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

<b>Test item description</b> ..... :	LED lighting chain (LED Strip Light)	
<b>Trade Mark</b> ..... :	GLAMOR	
<b>Manufacturer</b> .....	Same as applicant	
<b>Model/Type reference</b> .....	See "General product information"	
<b>Ratings</b> .....	220 V – 240 V AC; 50 Hz / 60Hz; IP65; Class II; non replaceable LED; other see "General product information"	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
<b>Testing location/ address</b> ..... :		198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	N/A
<b>Testing location/ address</b> ..... :		
<b>Tested by (name, function, signature)</b> ..... :		Sunday Zhou / Project Engineer 
<b>Approved by (name, function, signature)</b> ... :		Ivory Lu / Reviewer 
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
<b>Testing location/ address</b> ..... :		
<b>Tested by (name, function, signature)</b> ..... :		
<b>Approved by (name, function, signature)</b> ... :		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
<b>Testing location/ address</b> ..... :		
<b>Tested by (name + signature)</b> .....		
<b>Witnessed by (name, function, signature) . :</b>		
<b>Approved by (name, function, signature)</b> ... :		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
<b>Testing location/ address</b> ..... :		
<b>Tested by (name, function, signature)</b> ..... :		
<b>Witnessed by (name, function, signature) . :</b>		
<b>Approved by (name, function, signature)</b> ... :		
<b>Supervised by (name, function, signature) :</b>		

**List of Attachments (including a total number of pages in each attachment):**

Attachment 1: Differences between EN 60598-1: 2015 and EN60598-1: 2015 + A1: 2018 (Total: 4 pages)

Attachment 2: Additional requirement of EN 62031 (Total: 6 pages)

Attachment 3 Additional requirement test for EN 61347-2-11 (Total: 8 pages)

Attachment 4: Additional requirement of EN 62493 (Total: 1 page)

Attachment 5: Diagram circuit and PCB layout (Total: 1 page)

Attachment 6: Photo documentations (Total: 9 pages)

**Summary of testing:**

1. The submitted samples were found to be in compliance with the standard EN 60598-2-21: 2015 and EN 60598-1: 2015 + A1: 2018.
2. The LED module for ST2835-180T-32, ST5730-180T-32 and ST5050-60S-53 has been tested according to the standard EN 62031: 2008 + A1: 2013 + A2: 2015.
3. Photobiological hazard measurements have been tested according to Technical report IEC/TR 62778:2014 (Ed 2). According to the test results, Blue light hazard of the product belongs to RG1 and therefore no markings are required on the product or in the instructions.
4. The submitted samples were found to be in compliance with the EN 62493: 2015 according to the clause 4.2.2.
5. The rectifier was tested according to EN 61347-2-11: 2001 + A1: 2019 used in conjunction with EN 61347-1: 2015.
6. The model ST2835-180T-32 was selected to perform the full tests as it has onerous thermal, model ST5730-180T-32 and ST5050-60S-53 were performed additional photobiological hazard measurements as it has different LED use, Model ST2835-60S-96 was selected for additional mechanical load test as its weights is heavier than other models Other models were performed the construction check.

**Tests performed (name of test and test clause):**

21.6 Marking  
 21.7 Construction  
 21.8 Creepage distances and clearances  
 21.11 External and internal wiring  
 21.12 Protection against electric shock  
 21.13 Endurance tests and thermal tests  
 21.14 Resistance to dust, solid objects and moisture  
 21.15 Insulation resistance and electric strength  
 21.16 Resistance to heat, fire and tracking

**Testing location:**

198 Kezhu Road, Science City, Economic & Technology Development Area, Guangzhou, Guangdong, China

**Summary of compliance with National Differences (List of countries addressed):**




EU group differences was considered.

☒ The product fulfils the requirements of EN 60598-2-21: 2015, EN 62493: 2015 and EN 60598-1: 2015 + A1: 2018.

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

Representative:

Product name: LED Strip Light Item No.: ST2835-180T-32 Voltage: ~ 220V-240V Watt: 480 W Color: White Glamor Optoelectronics Technology Co., Ltd Made in China Standard: IEC/EN60598-2-21 Production Date: Jan., 2020	<b>WARNING:</b> *Please read the instruction carefully before use. *Strip light should not be connected to the supply while it is in the package or in accumulation. *Should not be electrical connected to other strip light or electric equipment. *Supply voltage should not be over 240V. *strip light should not be used if don't be sealed fully, LED lamps are not to be replaced.
   <b>IP65</b>	

Attached on the input cord

**Remark:**

1. The height of graphical symbols and CE logo were not less than 5 mm;
2. The height of letters and numerals were not less than 2 mm;
3. According to the standard, warning and text required by the standard should be written in the official language(s) of the country in which the appliance is to be sold. The applicant should ensure that the samples in future production fulfill the requirement.
4. As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.
5. Marking on the packaging or in a document accompanying the electrical equipment is only acceptable if it is not possible to place such markings on the product.
6. Other models have similar marking label as above, just model No. different.

<b>Test item particulars.....:</b>	
<b>Classification of installation and use.....:</b>	Fixed
<b>Supply Connection .....</b>	Connected to the main supply via flexible cord with a plug
<b>Class of equipment .....</b>	Class II
<b>Degree of protection .....</b>	IP65
<b>Mass of the equipment.....:</b>	Max. 9,5 kg (for ST2835-60S-96)
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....: N/A	
- test object does meet the requirement.....: P (Pass)	
- test object does not meet the requirement.....: F (Fail)	
<b>Testing.....:</b>	
<b>Date of receipt of test item .....</b>	2020-01-22
<b>Date (s) of performance of tests .....</b>	2020-01-22 to 2020-03-04
<b>General remarks:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.          "(See appended table)" refers to a table appended to the report.</p> <p><b>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</b></p> <p>Clause numbers between brackets refer to clauses in IEC 60598-1.          When determining for test conclusion, measurement uncertainty of tests has been considered.</p> <p>This document is issued by the Company subject to its General Conditions of Service, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.</p>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	

**Name and address of factory (ies) .....** : Same as applicant

**General product information:**

1. LED lighting chain, mounting on wall installation, connected to the supply via non-detachable cord fitted with a plug, Non-replaceable LEDs, IP65, Class II, for indoor or outdoor use.
2. All the models are same as the diagram circuit, PCB layout and used components, only different in the LED use and appearance.
3. ST series and BW series are identical, only different in appearance color.

4. Models detail:

models	wattage per meter (W/m)	"X" represents the length of product (increase 1 per step)	Max. wattage (W)
ST2835-60S-X, BW2835-60S-X	5 W/m	Max. 96 m	480 W
ST2835-120S-X, ST5050-60S-X, ST5730-60S-X, ST5730-120S-X, ST2835-120D-X, BW2835-120S-X, BW5050-60S-X, BW5730-60S-X, BW5730-120S-X, BW2835-120D-X	9 W/m	Max. 53 m	477 W
ST5730-120D-X, BW5730-120D-X	13 W/m	Max. 36 m	468 W
ST2835-180T-X, ST5730-180T-X, BW2835-180T-X, BW5730-180T-X	15 W/m	Max. 32 m	480 W

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>21.4 (0)</b>	<b>GENERAL TEST REQUIREMENTS</b>		
21.4 (0.1)	Information for luminaire design considered ..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> EN 62031	—
21.4 (0.3)	More sections applicable..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—

<b>21.5 (2)</b>	<b>CLASSIFICATION</b>		
21.5 (2.2)	Type of protection ..... :	Class II	P
21.5 (2.3)	Degree of protection..... :	IP65	P
21.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces ..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
21.5 (2.5)	Luminaire for normal use ..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service ..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
21.5.2 (-)	Class II or Class III		P
21.5.3 (-)	Rope lights for outdoor use shall be IP44 or higher		P

<b>21.6 (3)</b>	<b>MARKING</b>		
21.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
21.6 (3.3)	Additional information		P
	Language of instructions	English	P
21.6 (3.3.1)	Combination luminaires		N/A
21.6 (3.3.2)	Nominal frequency in Hz	50 Hz / 60Hz	P
21.6 (3.3.3)	Operating temperature		N/A
21.6 (3.3.4)	Symbol or warning notice		N/A
21.6 (3.3.5)	Wiring diagram		N/A
21.6 (3.3.6)	Special conditions		N/A
21.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
21.6 (3.3.8)	Limitation for semi-luminaires		N/A
21.6 (3.3.9)	Power factor and supply current		P
21.6 (3.3.10)	Suitability for use indoors		P
21.6 (3.3.11)	Luminaires with remote control		N/A
21.6 (3.3.12)	Clip-mounted luminaire – warning		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.6 (3.3.13)	Specifications of protective shields		N/A
21.6 (3.3.14)	Symbol for nature of supply		N/A
21.6 (3.3.15)	Rated current of socket outlet		N/A
21.6 (3.3.16)	Rough service luminaire		N/A
21.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		P
21.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
21.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
21.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
21.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided		P
	Cautionary symbol		N/A
21.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
21.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P
<b>21.6.2 (-)</b>	<b>Rope light marking</b>		<b>P</b>
	Rated voltage and wattage marked on the rope light		P
	Durable non-removable label if information on the cable		P
<b>21.6.3 (-)</b>	<b>Rope light and packing marking</b>		<b>N/A</b>
	Marking if only for indoor use		N/A
<b>21.6.4 (-)</b>	<b>Marking on the packing or instructions</b>		<b>P</b>
	Marking a) – e)		P

<b>21.7 (4)</b>	<b>CONSTRUCTION</b>		
21.7 (4.2)	Components replaceable without difficulty		N/A
21.7 (4.3)	Wireways smooth and free from sharp edges		P
<b>21.7 (4.4)</b>	<b>Lampholders</b>		<b>N/A</b>
21.7 (4.4.1)	Integral lampholder		N/A
21.7 (4.4.2)	Wiring connection		N/A



IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
21.7 (4.4.4)	Positioning		N/A
	- pressure test (N) .....		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N) .....		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
21.7 (4.4.5)	Peak pulse voltage		N/A
21.7 (4.4.6)	Centre contact		N/A
21.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
21.7 (4.4.8)	Lamp connectors		N/A
21.7 (4.4.9)	Caps and bases correctly used		N/A
21.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
<b>21.7 (4.5)</b>	<b>Starter holders</b>		<b>N/A</b>
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
<b>21.7 (4.7)</b>	<b>Terminals and supply connections</b>		<b>N/A</b>
21.7 (4.7.1)	Contact to metal parts		N/A
21.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
21.7 (4.7.3)	Terminals for supply conductors		N/A
21.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.2.3 and 15.6.2.4		N/A
21.7 (4.7.4)	Terminals other than supply connection		N/A
21.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
21.7 (4.7.6)	Multi-pole plug		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- test at 30 N		N/A
<b>21.7 (4.8)</b>	<b>Switches</b>		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
<b>21.7 (4.9)</b>	<b>Insulating lining and sleeves</b>		<b>N/A</b>
21.7 (4.9.1)	Retainment		N/A
	Method of fixing .....		N/A
21.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C).....		N/A
<b>21.7 (4.10)</b>	<b>Double or reinforced insulation</b>		<b>P</b>
21.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
21.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
21.7 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lampholder		N/A
<b>21.7 (4.11)</b>	<b>Electrical connections and current-carrying parts</b>		<b>P</b>
21.7 (4.11.1)	Contact pressure		P
21.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
21.7 (4.11.4)	Material of current-carrying parts		P
21.7 (4.11.5)	No contact to wood or mounting surface		P
21.7 (4.11.6)	Electro-mechanical contact systems		N/A
<b>21.7 (4.12)</b>	<b>Screws and connections (mechanical) and glands</b>		<b>N/A</b>
21.7 (4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
21.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
21.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm) ..... :		N/A
	- lampholder; torque (Nm) ..... :		N/A
	- push-button switches; torque 0,8 Nm ..... :		N/A
21.7 (4.12.5)	Screwed glands; force (Nm)..... :		N/A
<b>21.7 (4.13)</b>	<b>Mechanical strength</b>		<b>P</b>
21.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm) ..... :		N/A
	- other parts; energy (Nm)..... :	Enclosure: 0,5	P
	1) live parts		P
	2) linings		P
	3) protection		P
	4) covers		P
21.7 (4.13.3)	Straight test finger		P
21.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
21.7 (4.13.6)	Tumbling barrel		N/A
<b>21.7 (4.14)</b>	<b>Suspensions, fixings and means of adjusting</b>		<b>P</b>
21.7 (4.14.1)	Mechanical load:		P
	A) four times the weight	9,5 kg x 4 = 38 kg for ST2835-60S-96	P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)..... :		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm) .....		N/A
	Metal rod. diameter (mm) .....		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
21.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg) .....		—
	Stress in conductors (N/mm <sup>2</sup> ) .....		N/A
	Mass (kg) of semi-luminaire .....		N/A
	Bending moment (Nm) of semi-luminaire .....		N/A
21.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles..... :		N/A
	- strands broken .....		N/A
	- electric strength test afterwards		N/A
21.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
21.7 (4.14.5)	Guide pulleys		N/A
21.7 (4.14.6)	Strain on socket-outlets		N/A
<b>21.7 (4.15)</b>	<b>Flammable materials</b>		<b>P</b>
	- glow-wire test 650°C .....	See Test Table 21.16 (13.3.2)	P
	- spacing ≥30 mm		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
21.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
<b>21.7 (4.16)</b>	<b>Luminaires for mounting on normally flammable surfaces</b>		<b>P</b>
	No lamp control gear .....		P
21.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
21.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
21.7 (4.16.3)	Design to satisfy the test of 12.6		N/A
<b>21.7 (4.17)</b>	<b>Drain holes</b>		<b>N/A</b>
	Clearance at least 5 mm		N/A
<b>21.7 (4.18)</b>	<b>Resistance to corrosion</b>		<b>N/A</b>
21.7 (4.18.1)	- rust-resistance		N/A
21.7 (4.18.2)	- season cracking in copper		N/A
21.7 (4.18.3)	- corrosion of aluminium		N/A
21.7 (4.19)	Ignitors compatible with ballast		N/A
21.7 (4.20)	Rough service vibration		N/A
<b>21.7 (4.21)</b>	<b>Protective shield</b>		<b>N/A</b>
21.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
21.7 (4.21.3)	No direct path		N/A
21.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment..... :		N/A
21.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
21.7 (4.23)	Semi-luminaires comply Class II		N/A
<b>21.7 (4.24)</b>	<b>Photobiological hazards</b>		<b>P</b>
21.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
21.7 (4.24.2)	Retinal blue light hazard		P
	Luminaires with $E_{thr}$ :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2 ... :	RG1	P
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
<b>21.7 (4.25)</b>	<b>Mechanical hazard</b>		<b>P</b>
	No sharp point or edges		P
<b>21.7 (4.26)</b>	<b>Short-circuit protection</b>		<b>N/A</b>
21.7 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
21.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
<b>21.7 (4.27)</b>	<b>Terminal blocks with integrated screwless earthing contacts</b>		<b>N/A</b>
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 $\Omega$		N/A
	Pull test of mechanical connection (50 N)		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	After test, resistance < 0,05 $\Omega$		N/A
	Voltage drop test, resistance < 0,05 $\Omega$		N/A
<b>21.7 (4.28)</b>	<b>Fixing of thermal sensing control</b>		<b>N/A</b>
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ( $^{\circ}\text{C}$ ) ..... :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
<b>21.7 (4.29)</b>	<b>Luminaires with non-replaceable light source</b>		<b>P</b>
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		N/A
<b>21.7 (4.30)</b>	<b>Luminaires with non-user replaceable light source</b>		<b>N/A</b>
	If protective cover provide protection against electric shock and marked with “caution, electric shock risk” symbol:		N/A
	Minimum two fixing means		N/A
<b>21.7 (4.31)</b>	<b>Insulation between circuits</b>		<b>P</b>
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
<b>21.7 (4.31.1)</b>	<b>SELV circuits</b>		<b>N/A</b>
	Used SELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of SELV circuits from LV supply		N/A
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
21.7 (4.31.3)	Other circuits		P
	Other circuits insulated from accessible parts according Table X.1		P
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
<b>21.7 (4.32)</b>	<b>Overvoltage protective devices</b>		<b>N/A</b>
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
<b>21.7.2 (-)</b>	<b>Terminal blocks</b>		N/A
	Clause 4.6 of IEC 60598-1 referring to terminal blocks does not apply		—
<b>21.7.3 (-)</b>	<b>Terminals and supply connections</b>		<b>N/A</b>
	Comply with Annex A		N/A



IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>21.7.4 (-)</b>	<b>Control units</b>		<b>N/A</b>
	Forming an integral part enclosed in non-flammable insulating material tested according 21.16		N/A
	Securely fixed to the cable		N/A
	Electronic control device comply with IEC 61347-2-11		N/A
	LED driver comply with IEC 61347-2-13		N/A
<b>21.7.5 (-)</b>	<b>Mechanical strength</b>		<b>P</b>
	a) Rigid rope lights		N/A
	1) Pull test: force 60 N		N/A
	2) Torque test: torque 0,15 Nm		N/A
	b) Flexible rope lights		P
	1) Pull test: force 60 N		P
	2) Torque test: torque 0,15 Nm		P
	3) Cylinder 150 mm @ 10 times at 25 °C ± 2 °C		P
	For rope lights having an IP number over X0 Additionally: Cylinder 150 mm @ 10 times at -15 °C ± 2 °C		P
	4) Mandrel of between 4 and 5 times the diameter of test piece		P
	c) Impact test at low temperature of -15 °C ± 5 °C		P

<b>21.8 (11)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		
21.8 (11.2)	Creepage distances and clearances..... :	See Table 21.8 (11.2)	P
	Working voltage (V)..... :	220 V – 240 V	—
	Rated pulse voltage (kV)..... :	—	—
	Voltage form .....	Sinusoidal <input checked="" type="checkbox"/> Non-sinusoidal <input type="checkbox"/>	—
	PTI..... :	< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>	—
	Impulse withstand category (Normal category II) (Category III Annex U)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—

<b>21.10 (14)</b>	<b>SCREW TERMINALS</b>		
	Separately approved; component list		N/A
	Part of the luminaire		N/A

<b>21.10 (15)</b>	<b>SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS</b>		
	Separately approved; component list..... :		N/A
	Part of the luminaire .....		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>21.11 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		
<b>21.11 (5.2)</b>	<b>Supply connection and external wiring</b>		<b>P</b>
21.11 (5.2.1)	Means of connection .....	Connected to the main supply via flexible cord with a plug	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV $\leq 25$ V a.c./60 V d.c. or protected from outdoor environment		N/A
21.11 (5.2.2)	Type of cable.....	H05RN-F	—
	Nominal cross-sectional area (mm <sup>2</sup> ) .....	2 x 1,0 mm <sup>2</sup>	—
	Cables equal to IEC 60227 or IEC 60245		—
21.11 (5.2.3)	Type of attachment, X, Y or Z		P
21.11 (5.2.5)	Type Z not connected to screws		P
21.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
21.11 (5.2.7)	Cable entries through rigid material have rounded edges		N/A
21.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
21.11 (5.2.9)	Locking of screwed bushings		N/A
21.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
21.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
21.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	type Z	P
21.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N) ..... :	60	P
	- torque test: torque (Nm)..... :	0,25	P
	- displacement $\leq 2$ mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
21.11 (5.2.11)	External wiring passing into luminaire		N/A
21.11 (5.2.12)	Looping-in terminals		N/A
21.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
21.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
21.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Other appliance inlet or connector according relevant IEC standard		N/A
21.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
21.11 (5.2.18)	Used plug in accordance with		P
	- IEC 60083		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- other standard		P
<b>21.11 (5.3)</b>	<b>Internal wiring</b>		<b>P</b>
21.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A) .....		N/A
	- temperatures .....	(see Annex 2)	N/A
	Green-yellow for earth only		N/A
21.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm <sup>2</sup> ).....	0,5 mm <sup>2</sup>	P
	Insulation thickness	>0,5	P
	Extra insulation added where necessary		N/A
21.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Adequate cross-sectional area and insulation thickness		N/A
21.11 (5.3.1.3)	Double or reinforced insulation for class II		P
21.11 (5.3.1.4)	Conductors without insulation		N/A
21.11 (5.3.1.5)	SELV current-carrying parts		N/A
21.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
21.11 (5.3.2)	Sharp edges etc.		N/A
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		N/A
21.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.11 (5.3.4)	Joints and junctions effectively insulated		N/A
21.11 (5.3.5)	Strain on internal wiring		N/A
21.11 (5.3.6)	Wire carriers		N/A
21.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
<b>21.11.2 (-)</b>	<b>Cables for rope lights</b>		<b>P</b>
	Type of cable.....:	H05RN-F	P
	Cables not lighter than IEC 60227 or IEC 60245 for class II rope lights		P
	Cables not lighter than insulation according to 5.3.1 of part 1 for class III rope lights		N/A
	Nominal cross-sectional area (mm <sup>2</sup> ) .....	2 x 1,0 mm <sup>2</sup>	P
	Mechanical properties according 4.14.1 and 4.14.2 of part 1		N/A
<b>21.11.3 (-)</b>	<b>Cord anchorage test</b>		<b>N/A</b>
	Pull test 30 N 25 times on single-core cable		N/A
<b>21.11.4 (-)</b>	<b>Plugs and cable length</b>		<b>P</b>
	Splash-proof plug or permanent connection if for outdoor use		P
	Length of the cable between the plug and the connection to the rope light not less than 1,5 m		P
<b>21.11.5 (-)</b>	<b>Maximum length of extendable class II rope lights</b>		<b>P</b>
	Maximum length 100 m for 0,5 mm <sup>2</sup> cable		P
	Maximum length 150 m for 0,75 mm <sup>2</sup> cable		N/A
<b>21.12 (8)</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		
21.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
21.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
21.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
21.12 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N/A
21.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- touch current .....		N/A
	- no-load voltage.....		N/A
	Other than ordinary luminaire:		N/A
	- nominal voltage .....		N/A
21.12 (8.2.4)	Portable luminaire have protection independent of supporting surface		N/A
21.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
21.12 (8.2.6)	Covers reliably secured		P
21.12 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
<b>21.13 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		
21.13.1 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified in 21.14		P
21.13 (12.3)	Endurance test:		P
	- mounting-position..... :	As normal use	—
	- test temperature (°C) ..... :	35	—
	- total duration (h)..... :	240	—
	- supply voltage: Un factor; calculated voltage (V).... :	1,1 Un; 264 V	—
	- lamp used..... :	Non replaceable LEDs	—
21.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
21.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
21.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
21.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
21.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A) ..... :		—
	- case of abnormal conditions ..... :		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un ..... :		—
	- measured mounting surface temperature (°C) at 1,1 Un..... :		N/A
	- calculated mounting surface temperature (°C) ..... :		N/A
	- track-mounted luminaires		N/A
21.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions ..... :		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C) ..... :		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- track-mounted luminaires		N/A
21.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
21.13 (12.7.1)	Luminaire without temperature sensing control		N/A
21.13 (12.7.1.1)	Luminaire with fluorescent lamp $\leq 70W$		N/A
	Test method 12.7.1.1 or Annex W .....		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions .....		—
	- Ballast failure at supply voltage (V) .....		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions .....		—
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un .....		—
	- calculated temperature of fixing point/exposed part (°C) .....		—
	Ball-pressure test .....		N/A
21.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp $> 70W$ , transformer $> 10 VA$		N/A
	- case of abnormal conditions .....		—
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un .....		—
	- calculated temperature of fixing point/exposed part (°C) .....		—
	Ball-pressure test .....		N/A
21.13 (12.7.1.3)	Luminaire with short circuit proof transformers $\leq 10 VA$		N/A
	- case of abnormal conditions .....		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
21.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—



IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- auto reset cut-out .....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions .....		—
	- highest measured temperature of fixing point/ exposed part (°C): .....		—
	Ball-pressure test: .....		N/A
<b>21.13.2 (-)</b>	<b>Test voltage</b>		<b>P</b>
	Provision of 12.3.1 d) of part 1 and if class III rope lights 1,1 x rated voltage of transformer/convertor		—
	Provision of 12.4.1 d) of part 1 and if class III rope lights 1,06 x rated voltage of transformer/convertor		—
<b>21.13.3 (-)</b>	<b>Short-circuit test of rectifier</b>		<b>P</b>
	No emission of flames or molten material or production of flammable gases and no live parts accessible when short-circuit output of the rectifier		P

<b>21.14 (9)</b>	<b>RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE</b>		
21.14 (-)	If IP > IP 20 the order of tests as specified in clause 21.13		—
21.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP .....	IP65	—
	- mounting position during test .....	As normal use	—
	- fixing screws tightened; torque (Nm) .....	—	—
	- tests according to clauses .....	The clause 9.2.2 and clause 9.2.6 of IEC 60598-1	—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	d) i) For luminaires without drain holes – no water entry		P
	d) ii) For luminaires with drain holes – no hazardous water entry		N/A
	e) no water in watertight luminaire		P
	f) no contact with live parts (IP 2X)		N/A
	f) no entry into enclosure (IP 3X and IP 4X)		N/A
	f) no contact with live parts (IP3X and IP4X)		N/A
	g) no trace of water on part of lamp requiring protection from splashing water		N/A
	h) no damage of protective shield or glass envelope		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
21.14 (9.3)	Humidity test 48 h	25 °C; 93 % RH	P
<b>21.15 (10)</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		
21.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø .....	Covered by metal foil	—
	Insulation resistance (MΩ) .....		—
	SELV		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface .....		N/A
	- between current-carrying parts and metal parts of the luminaire .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
	Other than SELV		P
	- between live parts of different polarity .....	> 20 MΩ	P
	- between live parts and mounting surface .....	> 20 MΩ	P
	- between live parts and metal parts .....		N/A
	- between live parts of different polarity through action of a switch .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....	> 20 MΩ	P
	- Insulation bushings as described in Section 5 .....		N/A
21.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V) .....	240	P
	SELV		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface .....		N/A
	- between current-carrying parts and metal parts of the luminaire .....		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 ..... :		N/A
	Other than SELV		P
	- between live parts of different polarity ..... :	1480 V	P
	- between live parts and mounting surface ..... :	2960 V	P
	- between live parts and metal parts ..... :		N/A
	- between live parts of different polarity through action of a switch..... :		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts..... :		N/A
	- Insulation bushings as described in Section 5 ..... :		N/A
21.15 (10.3)	Touch current or protective conductor current (mA) :	Touch current: 0,01 mA; Limit: 0,7 mA	P

21.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		
21.16 (13.2.1)	Ball-pressure test ..... :	See Test Table 21.16 (13.2.1)	P
21.16 (13.3.1)	Needle-flame test (10 s)..... :	See Test Table 21.16 (13.3.1)	P
21.16 (13.3.2)	Glow-wire test (650°C)..... :	See Test Table 21.16 (13.3.2)	P
21.16 (13.4)	Proof tracking test (IEC 60112)..... :	See Test Table 21.16 (13.4)	P
20.16 (-)	Flexible pipes of rope lights in compliance with IEC 60811-508		P

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>21.8 (11.2)</b>	<b>TABLES: Creepage distances and clearances</b>						P
<b>Table 11.1</b>	<b>Minimum distances (mm) for a.c. (50/60 Hz) sinusoidal voltages</b>						P
RMS working voltage (V) not exceeding		50	150	250	500	750	1000
<b>Creepage distances</b>							
Required basic insulation, PTI $\geq$ 600		0,6	0,8	1,5	3	4	5,5
Measured		-	-	-	-	-	-
Required basic insulation, PTI < 600		1,2	1,6	2,5	5	8	10
Measured Between L and N		-	-	>3,3	-	-	-
Required supplementary insulation PTI $\geq$ 600		-	0,8	1,5	3	4	5,5
Measured		-	-	-	-	-	-
Required supplementary insulation PTI < 600		-	1,6	2,5	5	8	10
Measured Between cord anchorage and accessible enclosure		-	-	>3,3	-	-	-
Required reinforced insulation		-	3,2	5	6	8	11
Measured Between live part and enclosure / mounting surface		-	-	>6.5	-	-	-
<b>Clearances</b>							
Required basic insulation		0,2	0,8	1,5	3	4	5,5
Measured Between L and N		-	-	>2,0	-	-	-
Required supplementary insulation		-	0,8	1,5	3	4	5,5
Measured Between cord anchorage and accessible enclosure		-	-	>2,0	-	-	-
Required reinforced insulation		-	1,6	3	6	8	11
Measured Between live part and enclosure / mounting surface		-	-	>6.5	-	-	-
<b>Table 11.2</b>	<b>Minimum distances (mm) for non-sinusoidal pulse voltages</b>						N/A
Rated pulse voltage (peak kV)		2,0	2,5	3,0	4,0	5,0	6,0
Required clearances		1,0	1,5	2	3	4	5,5
Measured							
Rated pulse voltage (peak kV)		10	12	15	20	25	30
Required clearances		11	14	18	25	33	40
Measured							
Rated pulse voltage (peak kV)		50	60	80	100	-	-
Required clearances		75	90	130	170	-	-
Measured							

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

21.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm) ..... :		≤ 2		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure for rectifier	See Annex 1	75	1,71	
PCB for rectifier	See Annex 1	125	0,91	
Internal fixing ring	See Annex 1	125	1,88	
Supplementary information: —				

21.16 (13.3.1)	<b>TABLE: Needle-flame test (IEC 60695-11-5)</b>				<b>P</b>
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
PCB for rectifier	See Annex 1	10	No	0	P
Supplementary information: —					

21.16 (13.3.2)	<b>TABLE: Glow-wire test (IEC 60695-2-11)</b>				<b>P</b>
<b>Glow wire temperature .....</b>		<b>650°C</b>	<b>—</b>		
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
Enclosure for rectifier	See Annex 1	No	0	P	
Heat shirkable tube	See Annex 1	No	0	P	
Enclosure for LED module	See Annex 1	No	0	P	
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No)..... :					Yes
Supplementary information: —					

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

21.16 (13.4)	TABLE: Proof tracking test (IEC 60112)				P
Test voltage PTI ..... :		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Enclosure for LED module	See Annex 1	Yes	Yes	Yes	P
Enclosure for rectifier	See Annex 1	Yes	Yes	Yes	P
Supplementary information: —					

ANNEX A	Requirements for interconnecting connectors for use in rope lights			
	<b>This Annex A consist relevant requirements and modifications of IEC 61984</b>			<b>N/A</b>
<b>5.2</b>	<b>Classification according to protection against electric shock</b>			<b>N/A</b>
	Only enclosed connectors			N/A
<b>5.3</b>	<b>Classification according to the style of connector</b>			<b>N/A</b>
	Only free connectors			N/A
<b>5.4</b>	<b>Classification according to additional characteristics of connectors</b>			<b>N/A</b>
	According b), d), e), f), h), and j)			N/A
<b>6.2.1</b>	<b>Identification</b>			<b>N/A</b>
	According a) and b)			N/A
<b>6.4.1</b>	<b>Non accessibility of live parts</b>			<b>N/A</b>
	Test with test finger on class II rope lights			N/A
<b>6.9.1</b>	<b>Polarisation</b>			<b>N/A</b>
	Improper connection of mating parts is prevented			N/A
	No unsafe compatibility between connectors for class II and class III rope lights of the same manufacturer			N/A
	Male part of class III rope lights not make contact in the female contact of low voltage connectors (e.g. IEC 60320)			N/A
	Manufacturer designed connectors, no unsafe compatibility with systems according IEC 60320 and IEC 60906 and national domestic plug and socket-outlet systems in the country where the rope light is placed on the market			N/A
<b>6.9.3</b>	<b>Connection of conductors</b>			<b>N/A</b>
	Cross sectional area of the contact making part of the interconnecting coupler not less than the corresponding conductor in the interconnected cable			N/A
<b>6.10</b>	<b>Design of a CBC</b>			<b>N/A</b>
	Adequate breaking capacity			N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
	Female part at the end of the rope light, other than ordinary, provided with sealing device securely fixed to the coupler		N/A
<b>6.13</b>	<b>Dielectric strength</b>		<b>N/A</b>
	Test according clause 21.15 of this standard		N/A
<b>6.14.2</b>	<b>Electrical endurance (CBC)</b>		<b>N/A</b>
	Meet the specified breaking capacity		N/A
	Number of cycles 50		—
	Test according 7.3.5		N/A
<b>6.14.3</b>	<b>Bendings (non-rewirable connectors)</b>		<b>N/A</b>
	Meet the specified number of bendings		N/A
	Number of cycles 1000		—
	Test according 7.3.10		N/A
<b>6.17</b>	<b>Cable clamp</b>		<b>N/A</b>
	Test according clause 21.11.3 of this standard		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1		TABLE: Critical components information					
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
EU Plug	B	Yuyao Jingyi Electronics Co., Ltd.	JY02-F	AC250V; 16A; IP44	VDE 0620-2-1	VDE	
	D	Yuyao Siji Wire Industry Co., Ltd.	SJ-02	AC250V; 16A; IP44	VDE 0620-2-1	VDE	
	D	Guangdong Rifeng Electronics Co., Ltd.	RF-06	AC250V; 16A; IP44	VDE 0620-2-1	VDE	
	D	Zhongshan Guzhen Hongli Cable & Appliance Factory	HL-12	AC250V; 16A; IP44	VDE 0620-2-1	VDE	
UK Plug	B	Yuyao Jingyi Electronics Co., Ltd.	JY13A	AC250V; 50Hz; 10A; Fitted with 3 A BS 1362 approved fuse	BS 1363-1	BSI KM	
	D	Ming Tak Electrical Wiring Company Limited	NS-17A	AC 250V; 50Hz; 13A; Fitted with 3 A BS 1362 approved fuse	BS 1363-1	Intertek ASTA	
	D	Zhongshan Guzhen Hongli Cable & Appliance Factory	HL-17	AC250V; 50Hz; 10A; Fitted with 3 A BS 1362 approved fuse	BS 1363-1	Intertek ASTA	
Supply cord	B	Yuyao Jingyi Electronics Co., Ltd.	H05RN-F	2 x 1,0 mm <sup>2</sup>	EN 50525-2-21	VDE	
	D	Guangdong Rifeng Electronics Co., Ltd.	H05RN-F	2 x 1,0 mm <sup>2</sup>	EN 50525-2-21	VDE	
	D	Yuyao Siji Wire Industry Co., Ltd.	H05RN-F	2 x 1,0 mm <sup>2</sup>	EN 50525-2-21	VDE	
	D	Zhongshan Guzhen Hongli Cable & Appliance Factory	H05RN-F	2 x 1,0 mm <sup>2</sup>	EN 50525-2-21	VDE	
Internal wire	B	Zhongshan Tacwire Wire Limited	-	copper; 0,5 mm <sup>2</sup>	EN 60598-1 EN 60598-2-21	Tested with appliance	
Enclosure for LED module	B	Kingfa Sci & Tech Co., Ltd.	PVC-1018(f1)	PVC; V-0	EN 60598-1 EN 60598-2-21	UL & Tested with appliance	
	D	New Navigator Plastic. Co., Ltd.	T070N-2-Y	PVC; V-0	EN 60598-1 EN 60598-2-21	Tested with appliance	



IEC 60598-2-21						
Clause	Requirement + Test			Result - Remark		Verdict
Internal fixing ring	B	Foshan City Shunde District Mileybo Plastics Co., Ltd.	PP-FR100	PP; V-0;160 °C	EN 61347-1 EN 61347-2-11	Tested with appliance
Heat shrinkable tube	B	Guangdong Huawei New Material Technology Co., Ltd.	SBRS- (3X)	Φ25; EVA; 105 °C	EN 60598-1 EN 60598-2-21	Tested with appliance
	D	Dongguan Salipt Co., Ltd.	SALIPT S-902-600	Φ25; EVA; 105 °C	EN 60598-1 EN 60598-2-21	Tested with appliance
LED for ST2835-60S-X, BW2835-60S-X, ST2835-120S-X, ST2835-120D-X, BW2835-120S-X, BW2835-120D-X, ST2835-180T-X, BW2835-180T-X	B	M.L.S Electronics Co., Ltd.	E2835UX23	VF=2,8-3,6 V; IF=60mA; 3000-6500K	EN 62031	Tested with appliance
LED for ST5050-60S-X, BW 5050-60S-X	B	M.L.S Electronics Co., Ltd.	E5050UX20 W/WW	VF=2,8-3,6 V; IF=60mA; 3000-6500K	EN 62031	Tested with appliance
LED for ST5730-120D-X, BW5730-120D-X, BW 5730-60S-X, BW 5730-120S-X, ST5730-180T-X, BW5730-180T-X, ST5730-60S-X, ST5730-120S-X	B	M.L.S Electronics Co., Ltd.	E5730UX55 W/WW	VF=2,8-3,6 V; IF=150mA; 3000-6500K	EN 62031	Tested with appliance
Enclosure for rectifier	B	Foshan City Shunde District Mileybo Plastics Co., Ltd.	PP-FR100	PP; V-0;160 °C	EN 61347-1 EN 61347-2-11	Tested with appliance
PCB for rectifier	B	Kingboard Laminates Holdings Ltd.	KB-6150	V-0;130 °C	EN 61347-1 EN 61347-2-11	UL & Tested with appliance
Fuse for rectifier	B	Dongguan Reomax Electronics Co., Ltd.	FBP	AC 250 V; 3,15A; Standard sheet: 3 except the dimensions	EN 60127-1 EN 60127-3	VDE
Glue for rectifier	B	Dongguan Eatto Electronic Material Co., Ltd.	3300A/B	Epoxy casting compound; V-0	EN 61347-1 EN 61347-2-11	UL & Tested with appliance

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

<sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.

The codes above have the following meaning:

- A - The component is replaceable with another one, also certified, with equivalent characteristics
- B - The component is replaceable if authorised by the test house
- C - Integrated component tested together with the appliance
- D - Alternative component

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12		P				
	Type reference .....	ST2835-180T-32	—				
	Lamp used.....	Non-replaceable LEDs	—				
	Lamp control gear used.....	—	—				
	Mounting position of luminaire .....	As normal use	—				
	Supply wattage (W) .....	722,1	—				
	Supply current (A) .....	2,975	—				
	Calculated power factor.....	0,954	—				
	Table: measured temperatures corrected for ta = 60 °C:		P				
	- abnormal operating mode .....	LED Short-circuited	—				
	- test 1: rated voltage.....	—	—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage .....	1,06 x 240 V = 254,4 V	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage .....	—	—				
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage .....	1,1 x 240 V = 264 V	—				
	Through wiring or looping-in wiring loaded by a current of A during the test .....	—	—				
Temperature measurements, (°C)							
Part	Ambient	Clause 12.4 – normal				Clause 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Input wire	24,2	—	28,8	—	90	—	—
Connection LED wire	24,2	—	28,7	—	90	—	—
Heat shrinkable tube	24,2	—	29,5	—	Ref.	—	—
Cord anchorage	24,2	—	38,9	—	75	—	—
LED	24,2	—	61,5	—	Ref.	—	—
Enclosure for LED module	24,2	—	52,9	—	Ref.	—	—
PCB for rectifier	24,2	—	92,1	—	Ref.	—	—
Enclosure for rectifier	24,2	—	73,2	—	Ref.	—	—
Mounting surface	24,2	—	43,5	—	90	40,0	130
Object lighted (0,1 m)	24,2	—	52,3	—	90	50,8	175
Supplementary information: —							

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ANNEX 3</b>	<b>Screw terminals (part of the luminaire)</b>		
<b>(14)</b>	<b>SCREW TERMINALS</b>		<b>N/A</b>
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm <sup>2</sup> )..... :		—
(14.3.3)	Conductor space (mm)..... :		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)..... :	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm) .....		N/A
	Torque (Nm) .....		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N) .....		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ANNEX 4</b>	<b>Screwless terminals (part of the luminaire)</b>		
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>		<b>N/A</b>
(15.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples) .....		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples) .....		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples)..... :		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)..... :		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)..... :		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples) .....		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples) .....		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A
15.6.2	Mechanical tests		N/A

IEC 60598-2-21			
Clause	Requirement + Test	Result - Remark	Verdict
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) .....		N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) .....		N/A
(15.6.3)	Electrical tests		N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1		N/A

(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										
	Voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) ..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV) ..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										
	Max. allowed voltage drop (mV) ..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										
	Max. allowed voltage drop (mV) ..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

----- End of main report -----

Attachment 1: Differences between EN 60598-1: 2015 and EN60598-1: 2015 + A1: 2018			
Clause	Requirement + Test	Result - Remark	Verdict

<b>0</b>	<b>GENERAL TEST REQUIREMENTS</b>		
<b>0.7</b>	<b>Information for luminaire design in light sources standards</b>		—
0.7.2	Light source safety standard .....	EN 62031	—
	Luminaire design in the light source safety standard		N/A

<b>3</b>	<b>MARKING</b>		
3.2	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
3.3.4	Deleted: Symbol or warning notice		—
3.3.21	Non replaceable and non-user replaceable light sources information provided		P
3.3.23	Luminaire without controlgear provided with necessary information for selection of appropriate component		N/A
3.3.24	If not supplied with terminal block, information on the packaging		N/A

<b>4</b>	<b>CONSTRUCTION</b>		
<b>4.7</b>	<b>Terminals and supply connections</b>		<b>N/A</b>
4.7.3	Terminals for supply conductors		N/A
<b>4.14</b>	<b>Suspensions, fixings and means of adjusting</b>		<b>N/A</b>
4.14.1	Mechanical load:		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm) .....		N/A
<b>4.16</b>	<b>Luminaires for mounting on normally flammable surfaces</b>		<b>N/A</b>
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A

<b>5</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		
<b>5.2</b>	<b>Supply connection and external wiring</b>		<b>P</b>
5.2.1	Means of connection.....	Connected to the main supply via flexible cord with a plug	P
5.2.2	Type of cable .....	H05RN-F	P
	Nominal cross-sectional area (mm <sup>2</sup> ).....	2 x 1,0 mm <sup>2</sup>	P
	Cables equal to IEC 60227 or IEC 60245		P
<b>5.3</b>	<b>Internal wiring</b>		<b>N/A</b>

Attachment 1: Differences between EN 60598-1: 2015 and EN60598-1: 2015 + A1: 2018			
Clause	Requirement + Test	Result - Remark	Verdict

5.3.1.1	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm²) .....		N/A
	Insulation thickness		N/A
	Extra insulation added where necessary		N/A
5.3.1.2	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Cross-sectional area (mm²) .....		N/A
<b>5.4</b>	<b>Test to determine suitability of conductors having a reduced cross-sectional area</b>		N/A
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A

<b>9</b>	<b>RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE</b>		
9.2	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP .....	IP65	—
	- mounting position during test.....	As normal use	—
	- fixing screws tightened; torque (Nm) .....	—	—
	- tests according to clauses .....	The clause 9.2.2 and clause 9.2.6 of EN 60598-1	—
	- electric strength test afterwards		P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight or pressure watertight luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A

<b>11</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		
-----------	--	--	--



Attachment 1: Differences between EN 60598-1: 2015 and EN60598-1: 2015 + A1: 2018			
Clause	Requirement + Test	Result - Remark	Verdict

11.2.1	Impulse withstand category (Normal category II)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
11.2.2	Creepage distances for frequency up to 30 kHz	See Test Table 11.2 I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $\hat{U}_{OUT}$ and $f_{UOUT}$ according IEC 61347-1, clause 7.1, item w		N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347		N/A
11.2.3	Clearances for frequency up to 30 kHz	See Test Table 11.2 I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $U_P$		N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347		N/A

<b>12</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		
<b>12.2</b>	<b>Selection of lamps and ballasts</b>		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Controlgear if separate and not supplied	(Controlgear used see Annex 2)	—
12.3	Endurance test:		P
	a) mounting-position .....	As normal use	—
	b) test temperature (°C) .....	35	—
	c) total duration (h) .....	240	—
	d) supply voltage (V) .....	264	—
	d) if not equipped with controlgear, constant voltage/current (V) or (A) .....	—	—
12.3.2	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
<b>12.4</b>	<b>Thermal test (normal operation).....</b>	(see Annex 2)	<b>P</b>
<b>12.5</b>	<b>Thermal test (abnormal operation) .....</b>	(see Annex 2)	<b>P</b>

Attachment 1: Differences between EN 60598-1: 2015 and EN60598-1: 2015 + A1: 2018			
Clause	Requirement + Test	Result - Remark	Verdict

1.7 (11.2)	TABLE I: Creepage distances and clearances							P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages							P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*							P
	Insulation type **	Measured clearance	Required		Measured creepage	Required		
			clearance	*Table		creepage	*Table	
Distance 1:	B	>2,0	1,5	11,1B	>3,3	2,5	11,1A	
Working voltage (V) .....					240 V		—	
PTI.....					< 600 ☒      ≥ 600 ☐		—	
Pulse voltage or $U_P$ if applicable (kV) .....					—		—	
Supplementary information: Between L and N								
Distance 2:	S	>2,0	1,5	11,1B	>3,3	2,5	11,1A	
Working voltage (V) .....					240 V		—	
PTI.....					< 600 ☒      ≥ 600 ☐		—	
Pulse voltage or $U_P$ if applicable (kV) .....					—		—	
Supplementary information: Between cord anchorage and accessible enclosure								
Distance 3:	R	>3,9	3	11,1B	>6,5	5	11,1A	
Working voltage (V) .....					240 V		—	
PTI.....					< 600 ☒      ≥ 600 ☐		—	
Pulse voltage or $U_P$ if applicable (kV) .....					—		—	
Supplementary information: Between live part and enclosure / mounting surface								

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

- - - - End of attachment 1 - - - -

Attachment 2: Additional test for EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL REQUIREMENTS</b>		
4.4	Integral modules tested assembled in the luminaire		P
4.5	Independent modules complies with requirements in IEC 60598-1		N/A
<b>5</b>	<b>GENERAL TEST REQUIREMENTS</b>		
5.5	SELV-operated LED modules comply with Annex I of IEC 61347-2-13		N/A
	General conditions for tests in Annex A		P
<b>6</b>	<b>CLASSIFICATION</b>		
	Built-in module ..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent module ..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral module ..... :	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	For Integral module; Note to 1.2.1 in IEC 60598-1 applies.		—
<b>7</b>	<b>MARKING</b>		<b>N/A</b>
<b>8</b>	<b>TERMINALS</b>		<b>N/A</b>
<b>9 (9)</b>	<b>PROVISION FOR PROTECTIVE EARTHING</b>		<b>N/A</b>
<b>10 (10)</b>	<b>PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS</b>		
- (10.1)	Controlgear protected against accidental contact with live parts		P
- (A2)	The current flowing between the part concerned and earth is measured and does not exceed 0,7 mA (peak) or 2 mA d.c. .... :		N/A
- (A2)	For frequencies above 1 kHz, the current does not exceed 0,7 mA (peak) multiplied by the value of the frequency in kilohertz or 70 mA (peak) ..... :		N/A
- (A3)	The voltage between the part concerned and any accessible part is measured and does not exceed 34 V (peak) ..... :		N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		P
	Adequate mechanical strength on parts providing protection		P
- (10.2)	Capacitors > 0,5 µF: voltage after 1 min (V): < 50 V ..... :		N/A
- (10.3)	Controlgear providing SELV		N/A

## Attachment 2: Additional test for EN 62031

Clause	Requirement + Test	Result - Remark	Verdict
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load $\leq 25$ V r.m.s. or $\leq 60$ V d.c.		N/A
	If output voltage $> 25$ V r.m.s. or $> 60$ V d.c.; No load output $\leq 35$ V peak or $\leq 60$ V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c. ....:		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A

<b>11 (11)</b>	<b>MOISTURE RESISTANCE AND INSULATION</b>		
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (M $\Omega$ ):		P
	For basic insulation $\geq 2$ M $\Omega$ .....		N/A
	For double or reinforced insulation $\geq 4$ M $\Omega$ .....	20 M $\Omega$	P
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A

<b>12 (12)</b>	<b>ELECTRIC STRENGTH</b>		
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		N/A

Attachment 2: Additional test for EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Working voltage $\leq 50$ V, test voltage 500 V		N/A
	Working voltage $> 50$ V $\leq 1000$ V, test voltage (V):		P
	Basic insulation, $2U + 1000$ V		N/A
	Supplementary insulation, $2U + 1000$ V		N/A
	Double or reinforced insulation, $4U + 2000$ V	2960 V	P
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

<b>13 (14)</b>	<b>FAULT CONDITIONS</b>		
- (14)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected		N/A
- (14.1)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts)		N/A
	Creepage distances on printed boards less than specified in clause 16 in Part 1 provided with coating according to IEC 60664-3		N/A
- (14.2)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.3)	Short-circuit across insulation consisting of lacquer, enamel or textile		N/A
- (14.4)	Short-circuit across electrolytic capacitors		N/A
- (14.5)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1$ M $\Omega$ :	20 M $\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.6)	Relevant fault condition tests with high-power supply		N/A
<b>13.2</b>	<b>Overpower condition</b>		<b>P</b>
	Module withstands overpower condition $>15$ min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A

Attachment 2: Additional test for EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
<b>15</b>	<b>CONSTRUCTION</b>		
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
<b>16 (16)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		<b>P</b>
- (16)	Creepage and distances and clearances in compliance with IEC 61347-1	(see appended table)	P
	Insulating lining of metallic enclosures		N/A
	Basic insulation on printed boards tested according to clause 14		P
	Distances subjected to both sinusoidal voltage as non-sinusoidal pulses not less than value in Table 16		N/A
	Creepage distances not less than minimum clearance		P
16 (-)	Conductive accessible parts in compliance with applicable parts of IEC 60598-1		P
<b>17 (17)</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		
	Cl. 17 refer to Cl. 17 of IEC 61347-1 which refer to Cl. 4.11 and 4.12 of IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		—
<b>(4.11)</b>	<b>Electrical connections</b>		<b>P</b>
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A
<b>(4.12)</b>	<b>Mechanical connections and glands</b>		<b>N/A</b>
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :		N/A

Attachment 2: Additional test for EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Torque test: torque (Nm); part..... :		N/A
	Torque test: torque (Nm); part..... :		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm) ..... :		N/A
	- lampholder; torque (Nm) ..... :		N/A
	- push-button switches; torque 0,8 Nm ..... :		N/A
(4.12.5)	Screwed glands; force (Nm)..... :		N/A
<b>18 (18)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		N/A
<b>19 (19)</b>	<b>RESISTANCE TO CORROSION</b>		N/A
<b>20</b>	<b>INFORMATION FOR LUMINAIRE DESIGN</b>		N/A
<b>21</b>	<b>HEAT MANAGEMENT</b>		N/A
<b>22</b>	<b>PHOTOBIOLOGICAL SAFETY</b>		
<b>22.1</b>	<b>UV radiation</b>		<b>P</b>
	Luminous radiation not exceed 2mW/klm		P
<b>22.2</b>	<b>Blue light hazard</b>		<b>P</b>
	Assessed according to IEC TR 62778	RG1	P
<b>22.3</b>	<b>Infrared radiation</b>		<b>N/A</b>
	Requirements for infrared radiation when required		N/A
<b>A</b>	<b>ANNEX A - TESTS</b>		
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		P
<b>13 (14)</b>	<b>TABLE: tests of fault conditions</b>		<b>P</b>
<b>Part</b>	<b>Simulated fault</b>		<b>Hazard</b>
LED	Short-circuited; No damaged		NO
LED	Open circuit; No damaged		NO

Attachment 2: Additional test for EN 62031			
Clause	Requirement + Test	Result - Remark	Verdict

16 (16)	TABLE: clearance and creepage distance measurements (mm)						P
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	R	>3,9	3	9	>6,5	5	7
Working voltage (V) .....					240		—
Frequency if applicable (kHz) .....					—		—
PTI .....					< 600 ☒      ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....					—		—
Pulse voltage if applicable (kV) .....					—		—
Supplementary information: Between live part and accessible parts							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced

- - - End of attachment 2 - - -



Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

<b>4 (4)</b>	<b>GENERAL REQUIREMENTS</b>		
- (4)	<u>Insulation materials</u> for double or reinforced insulation according requirements in Annex N of IEC 61347-1	(see Annex N)	N/A
- (4)	Compliance of <u>independent controlgear enclosure</u> with IEC 60598-1		N/A
- (4)	<u>Built-in magnetic ballast</u> with double or reinforced insulation comply with Annex I of IEC 61347-1		N/A
- (4)	<u>Built-in electronic controlgear</u> with double or reinforced insulation comply with Annex O of IEC 61347-1	(see Annex O)	N/A
- (4)	<u>SELV controlgear</u> comply with Annex L of IEC 61347-1	(see Annex L)	N/A

<b>6 (6)</b>	<b>CLASSIFICATION</b>		
	Built-in controlgear .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent controlgear .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral controlgear .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—

<b>7 (7)</b>	<b>MARKING</b>	N/A
--------------	----------------	-----

<b>8 (10)</b>	<b>PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS</b>		
- (10.1)	Controlgear protected against accidental contact with live parts	Tested with luminaires	P
- (A2)	Voltage measured with 50 k $\Omega$	(see Annex A)	N/A
- (A3)	Voltage > 35 V peak or > 60 V d.c.	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		P
	Adequate mechanical strength on parts providing protection		P
- (10.2)	Capacitors > 0,5 $\mu$ F: voltage after 1 min (V): < 50 V .....		N/A
<b>- (10.3)</b>	<b>Controlgear providing SELV</b>		N/A
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	SELV outputs separated by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1	(see Annex L)	N/A
<b>- (10.4)</b>	<b>Accessible conductive parts in SELV circuits</b>		N/A
	Output voltage under load $\leq 25$ V r.m.s. or $\leq 60$ V d.c.		N/A
	If output voltage $> 25$ V r.m.s. or $> 60$ V d.c.; No load output $\leq 35$ V peak or $\leq 60$ V d.c and touch current does not exceed 0,7 mA (peak) or 2 mA d.c. ....:		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
<b>9 (8)</b>	<b>TERMINALS</b>		N/A
<b>10 (9)</b>	<b>PROVISION FOR EARTHING</b>		N/A
<b>11 (11)</b>	<b>MOISTURE RESISTANCE AND INSULATION</b>		
- (11)	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance:		P
	For basic insulation $\geq 2$ M $\Omega$ ..... :	$>20$ M $\Omega$	P
	For double or reinforced insulation $\geq 4$ M $\Omega$ ..... :	$>20$ M $\Omega$	P
- (11)	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A
<b>12 (12)</b>	<b>ELECTRIC STRENGTH</b>		
- (12)	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		N/A
	Working voltage $\leq 50$ V, test voltage 500 V		N/A
	Working voltage $> 50$ V $\leq 1000$ V, test voltage (V):		P
	Basic insulation, 2U + 1000 V	1480 V	P

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
	Supplementary insulation, 2U + 1000 V	1480 V	P
	Double or reinforced insulation, 4U + 2000 V	2960 V	P
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A

<b>14 (14)</b>	<b>FAULT CONDITIONS</b>		
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	N/A
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1 \text{ M}\Omega$ .....	>20 M $\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply		—

<b>15 (15)</b>	<b>CONSTRUCTION</b>		
- (15.1)	<b>Wood, cotton, silk, paper and similar fibrous material</b>		<b>P</b>
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
- (15.2)	<b>Printed circuits</b>		<b>P</b>

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

	Printed circuits used as internal connections complies with clause 14		P
--	---	--	---

<b>17 (16)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		<b>P</b>
- (16)	Creepage distances and clearances according to 16.2 and 16.3		P
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P	(see Annex P)	N/A
<b>- (16.2)</b>	<b>Creepage distances</b>		<b>P</b>
- (16.2.2)	Minimum creepage distances for working voltages		P
	Creepage distances according to Table 7	(see appended table)	P
- (16.2.3)	Creepage distances for working voltages with frequencies above 30 kHz		N/A
	Creepage distances according to Table 8	(see appended table)	N/A
<b>- (16.3)</b>	<b>Clearances</b>		<b>P</b>
- (16.3.2)	Clearances for working voltages		P
	Clearances distances according to Table 9	(see appended table)	P
- (16.3.3)	Clearances for ignition voltages and working voltages with higher frequencies		N/A
	Clearances distances for basic or supplementary insulation according to Table 10	(see appended table)	N/A
	Clearances distances for reinforced insulation according to Table 11	(see appended table)	N/A

<b>17 (17)</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		<b>P</b>
<b>- (17)</b>	<b>Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)</b>		<b>P</b>
<b>(4.11)</b>	<b>Electrical connections</b>		<b>P</b>
(4.11.1)	Contact pressure		P
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
(4.11.6)	Electro-mechanical contact systems		N/A
<b>(4.12)</b>	<b>Mechanical connections and glands</b>		N/A
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
(4.12.5)	Screwed glands; force (Nm) .....		N/A

<b>18 (18)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		<b>P</b>
- (18.1)	Ball-pressure test .....	See Test Table 18 (18.1)	P
- (18.2)	Test of printed boards .....	See Test Table 18 (18.2)	P
- (18.3)	Glow-wire test .....	See Test Table 18 (18.3)	P
- (18.4)	Needle flame test .....	See Test Table 18 (18.4)	P
- (18.5)	Tracking test .....	See Test Table 18 (18.5)	P

<b>19 (19)</b>	<b>RESISTANCE TO CORROSION</b>		<b>N/A</b>
	- test according 4.18.1 of IEC 60598-1		N/A
	- adequate varnish on the outer surface		N/A

<b>20 (-)</b>	<b>ANNEXES</b>		
	Comply with appropriate annexes of IEC 61347-1	(see Annexes)	P

<b>14</b>	<b>TABLE: tests of fault conditions</b>		
Part	Simulated fault		Hazard
D1	Open circuit; No damaged		NO
D1	Shorted circuit; No damaged		NO

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict

16 (16)		TABLE: creepage distance and clearance (mm)					P
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	>2,0	1,5	9	>3,3	2,5	7
Working voltage (V) .....					240 V		—
Frequency if applicable (kHz) .....					—		—
PTI .....					< 600 ☒ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....					—		—
Pulse voltage if applicable (kV) .....					—		—
Supplementary information: Measured at L&N							
Distance 2:	R	>3,9	3	9	> 6,5	5	7
Working voltage (V) .....					240 V		—
Frequency if applicable (kHz) .....					—		—
PTI .....					< 600 ☒ ≥ 600 ☐		—
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....					—		—
Pulse voltage if applicable (kV) .....					—		—
Supplementary information: Between live part and accessible parts							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced

18 (18.1)	TABLE: Ball Pressure Test				P
Allowed impression diameter (mm) ..... :		≤2,0 mm			—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)		Impression diameter (mm)	
PCB	See Annex 1	125		0,91	
Enclosure for rectifier	See Annex 1	75		1,71	
Supplementary information: —					

18 (18.2)	TABLE: Test of printed boards				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
PCB	See Annex 1	10	No	0	P
Supplementary information: —					

Attachment 3 Additional requirement test for EN 61347-2-11				
Clause	Requirement + Test		Result - Remark	Verdict
<b>18 (18.3)</b>	<b>TABLE: Glow-wire test</b>			<b>P</b>
<b>Glow wire temperature..... :</b>		650°C		—
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
Enclosure	See Annex 1	No	0	P
Supplementary information: —				

<b>18 (18.4)</b>	<b>TABLE: Needle-flame test</b>				<b>P</b>
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
PCB	See Annex 1	10	No	0	P
Supplementary information: —					

<b>18 (18.5)</b>	<b>TABLE: Proof tracking test</b>				<b>P</b>
<b>Test voltage PTI ..... :</b>		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Enclosure	See Annex 1	Pass	Pass	Pass	P
Supplementary information: —					

<b>(A)</b>	<b>ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK</b>	N/A
------------	---	-----

<b>(C)</b>	<b>ANNEX C – PARTICULAR REQUIREMENTS FOR ELECTRONIC LAMP CONTROLGEAR WITH MEANS OF PROTECTION AGAINST OVERHEATING</b>	N/A
------------	---	-----

<b>(D)</b>	<b>ANNEX D – REQUIREMENTS FOR CARRY OUT THE HEATING TESTS OF THERMALLY PROTECTED LAMP CONTROLGEAR</b>	N/A
------------	---	-----

<b>(F)</b>	<b>ANNEX F - DRAUGHT-PROOF ENCLOSURE</b>			
	Draught-proof enclosure in accordance with the description			P
	Dimensions of the enclosure			P
	Other design; description			N/A

Attachment 3 Additional requirement test for EN 61347-2-11			
Clause	Requirement + Test	Result - Remark	Verdict
<b>(H)</b>	<b>ANNEX H - TESTS</b>		
	All tests performed in accordance with the advice given in Annex H, if applicable		P
<b>(I)</b>	<b>ANNEX I – ADDITIONAL REQUIREMENTS FOR BUILT-IN MAGNETIC BALLASTS WITH DOUBLE OR REINFORCED INSULATION</b>		N/A
<b>(L)</b>	<b>ANNEX L: PARTICULAR ADDITIONAL REQUIREMENTS FOR CONTROLGEARS PROVIDING SELV</b>		N/A
<b>(N)</b>	<b>ANNEX N - REQUIREMENTS FOR INSULATION MATERIALS USED FOR DOUBLE OR REINFORCED INSULATION</b>		N/A
<b>(O)</b>	<b>ANNEX O - ADDITIONAL REQUIREMENTS FOR BUILT-IN ELECTRONIC CONTROLGEAR WITH DOUBLE OR REINFORCED INSULATION</b>		N/A
<b>(P)</b>	<b>ANNEX P - Creepage distances and clearances and distance through isolation (DTI) for lamp controlgear which are protected against pollution by the use of coating or potting</b>		N/A

- - - End of attachment 3 - - -




<b>Attachment 3: Additional test for EN 62493</b>			
Clause	Requirement + Test	Result - Remark	Verdict
4	LIMITS (Test summary)		P
4.2.2	Lighting equipment deemed to comply with the Van der Hoofden test without testing		P
4.2.3	Unintentional radiating part of lighting equipment	factor $F \leq 1$	N/A
4.3	Intentional radiating part of lighting equipment	No intentional radiating from EUT	N/A


- - - End of attachment 4 - - -

## Attachment 5: Diagram circuit and PCB layout

## Diagram circuit:

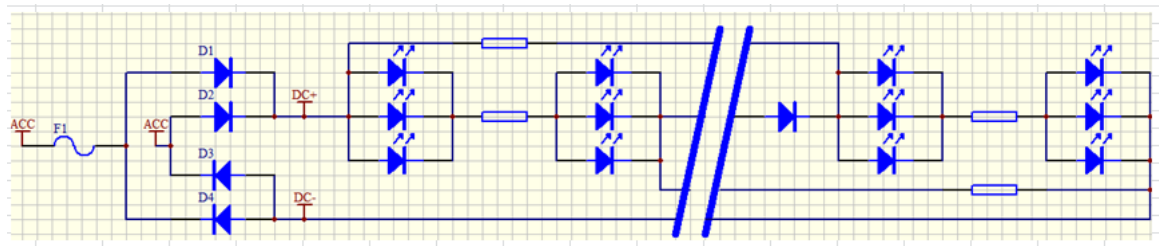

## PCB layout:

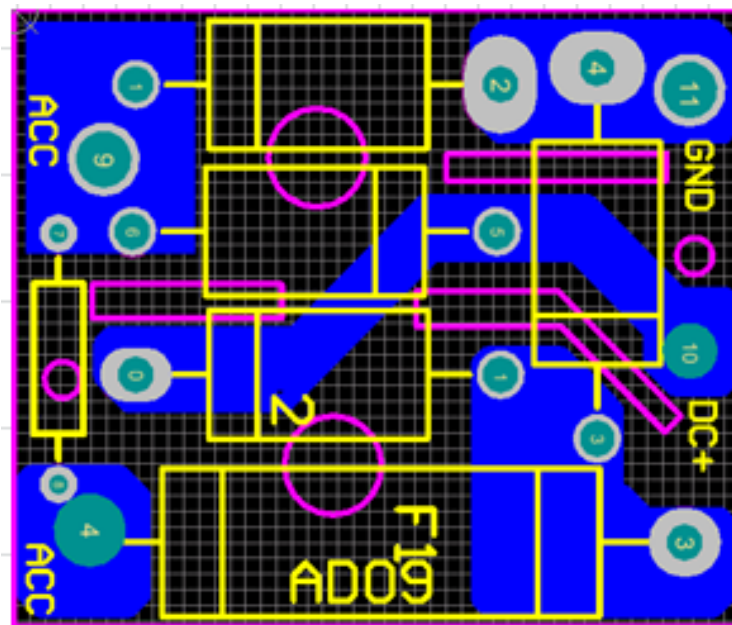

- - - End of attachment 5 - - -

## Attachment 6: Photo documentations

Details of: General view for ST2835-180T-X; other models are identical construction, only different LED modules appearance.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: Rectifier view for all models; The inside is filled with glue

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



## Attachment 6: Photo documentations

Details of: Internal view for rectifier

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

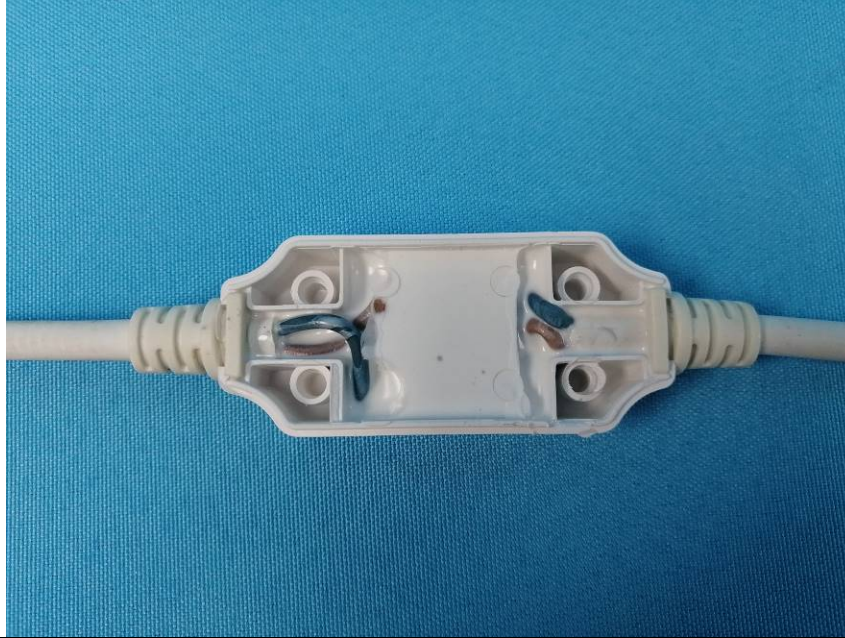

Details of: PCB view for rectifier

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

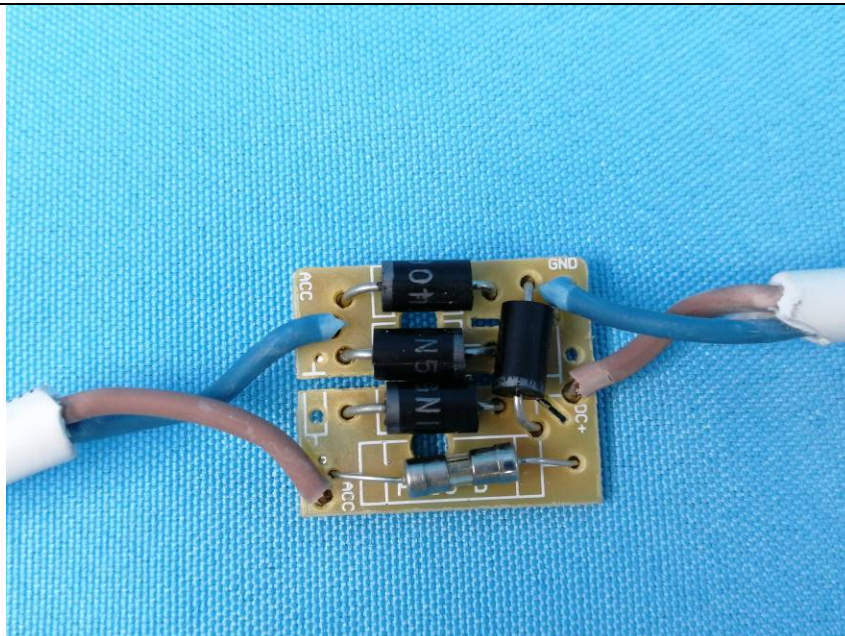




## Attachment 6: Photo documentations


Details of: PCB view for rectifier

View:

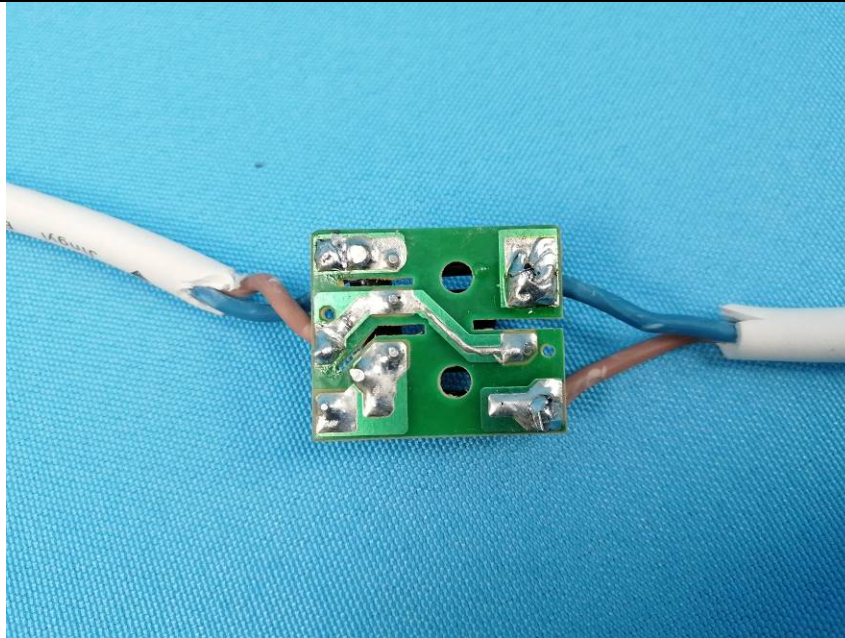☒ general☐ front☐ rear☐ right☐ left☐ top☐ bottom

Details of: Bottom view for all models

View:

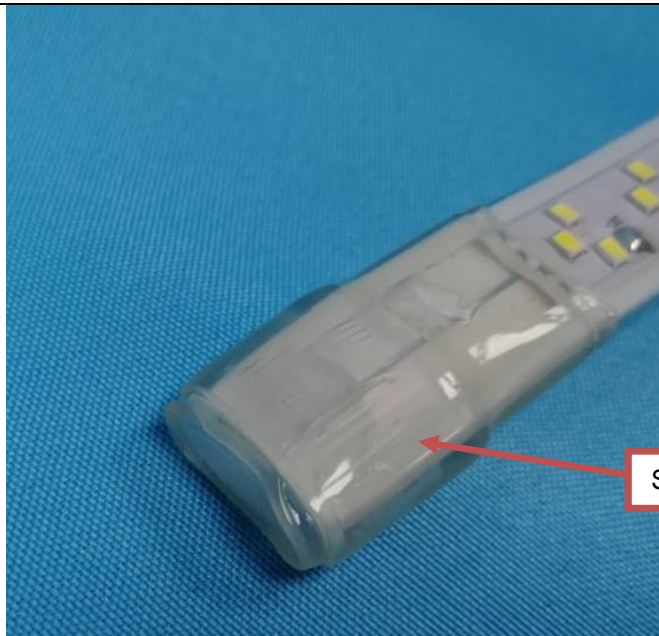☒ general☐ front☐ rear☐ right☐ left☐ top☐ bottom

Seal with glue

## Attachment 6: Photo documentations

Details of: LED wire view for all models

View:

☒ general

☐ front


☐ rear

☐ right

☐ left

☐ top

☐ bottom

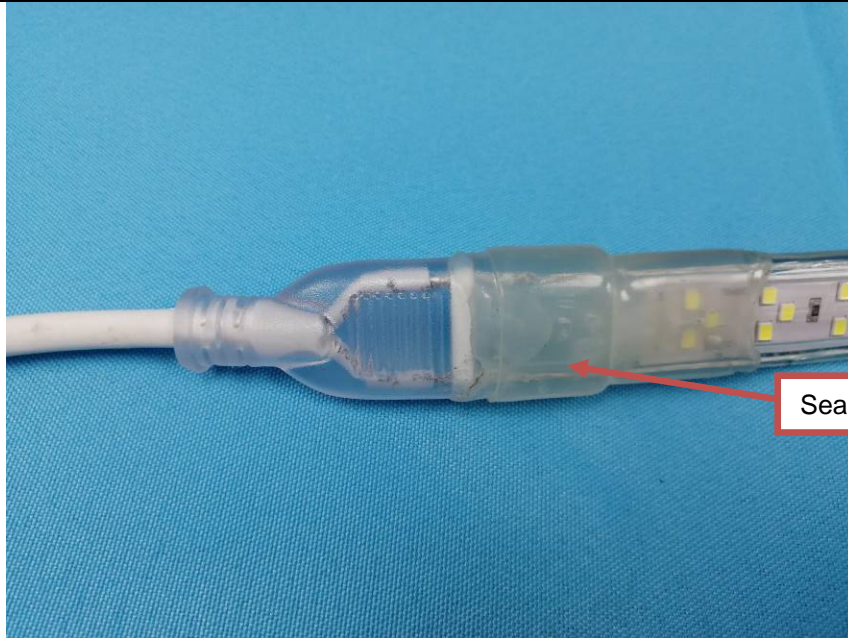

Details of: LED modules view for ST2835-180T-X; model BW2835-180T-X is identical, only different in appearance color.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom





## Attachment 6: Photo documentations

Details of: LED modules view for ST5730-180T-X; model BW5730-180T-X is identical, only different in appearance color.

---

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: LED modules view for ST5050-60S-X; model BW5050-60S-X is identical, only different in appearance color.

---

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



## Attachment 6: Photo documentations

Details of: LED modules view for ST2835-60S-X; model BW2835-60S-X is identical, only different in appearance color.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: LED modules view for ST2835-120S-X; model BW2835-120S-X is identical, only different in appearance color.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom





## Attachment 6: Photo documentations

Details of: LED modules view for ST5730-60S-X; model BW5730-60S-X is identical, only different in appearance color.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



Details of: LED modules view for ST5730-120S-X; model BW5730-120S-X is identical, only different in appearance color.

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom




## Attachment 6: Photo documentations

Details of:

LED modules view for ST2835-120D-X; models BW2835-120D-X is identical, only different in appearance color.

View:

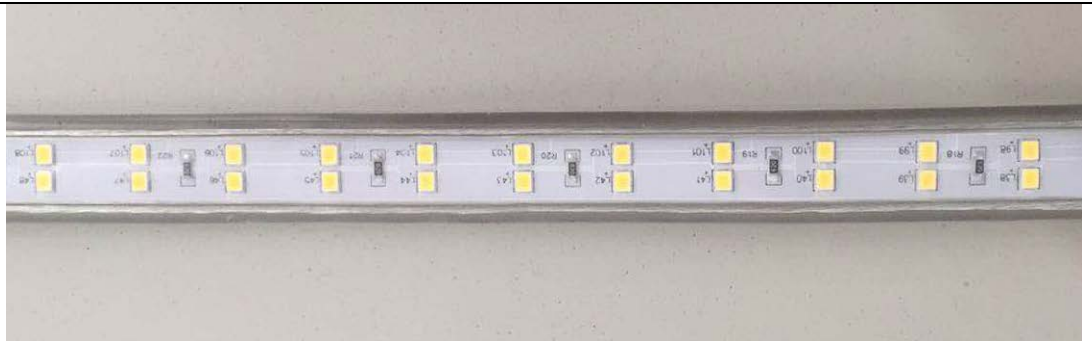☒ general☐ front☐ rear☐ right☐ left☐ top☐ bottom

Details of:

LED modules view for ST5730-120D-X; models BW5730-120D-X is identical, only different in appearance color.

View:

☒ general☐ front☐ rear☐ right☐ left☐ top☐ bottom

## Attachment 6: Photo documentations

Details of: BW series LED modules appearance color view

View:

☒ general

☐ front

☐ rear

☐ right

☐ left

☐ top

☐ bottom



- - - End of attachment 6 - - -