


PRODUCT DATASHEET

Rechargeable LIGHT @ WORK 2x10 W - 6400 K - IP54

Item Nr 629012420

Worklight with individual reflectors per SMD – Temperate Milky PC cover







APPLICATION

- Replacement of old technology light
- Construction site
- Painting site
- Emergency

PRODUCT BENEFITS

- Robust housing, to be safety working at construction site
- Folding design for twin brightness
- Emergency
- 5 years warranty

PRODUCT FEATURES

- Lumen efficiency up to 80 Lumen / Watt
- With powerbank function, for quick charging for phone, pad, etc..
- With micro USB charging port
- With dimming function / stepless
- With battery indicator, to check the power at any time
- Type of protection: IP54
- Impact resistance: IK08
- Working temperature: -10° up to +40°
- Connection via 1 meter USB charging cable

Ethos by Energy Distribution – July 2019 – technical sheet 621023062



TECHNICAL DATA


Electrical data

Nominal wattage	2 x 10 Watt
Operating mode	battery
Nominal Voltage	/
Power Factor	>0,9
Mains frequency	/

Photometrical data

Color temperature	6400 Kelvin
Luminous flux	1600 lm
Luminus efficiency	80 lm/watt
Color matching / deviation	Blue
Denomination of the color	Cool White
CRI (Color rendering Index Ra)	>80

Dimension & weight

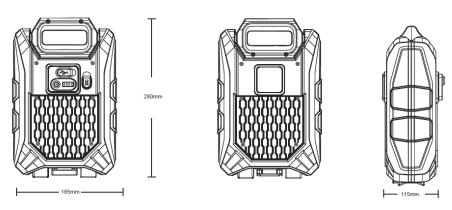

Lenght	280mm
Thikness	115mm
Height	185mm
Weight	1300g
Cable Type and lenght	1m USB charging cable

Color & material

Body material	ABS + PC
Product Color	Blue
Housing	Blue
Front Glass	Milky PC cover

Temperature & operation

Working temperatures	Minus 10° up to 40° Celcius
The state of the s	Third is the second


Different product data

Mounting location	Floor / Tripod
Dimmable	Yes
Connection	
LED module	SMD Not replacable
LED Brand	San'an
Driver	
Lifetime	25000 at 25° Celcius
ON/OFF tests	500 cycles

Certifications

Impact protection class	IK08
Glow wire according IEC 695-2-1	
Photobiological safety group EN62778	
Photobiological safety group accessories EN62471	
Protection class	
Insulation protection	IP54
Limited temperature class	
CE Certifications	CE/EMC/RoHS/IK08

Light distribution curve



Item	Ean Code	Packaging	Dimensions	Gross Weight
629012420	5420080905432	Carton	61 x 26 x 30cm	10kg

For all other questions, please contact our commercial division : info@ethos-europe.com