


# PRODUCT DATASHEET

## LIGHT @ WORK 2x20 W - 6400 K – IP54

Item Nr 629124420

Worklight with individual reflectors per SMD – Temperate Milky PC cover

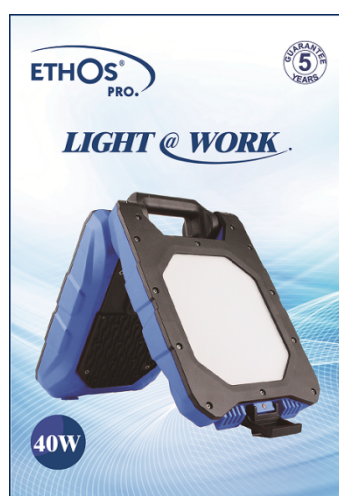

---

### APPLICATION

- Replacement of halogen worklights
- Construction site
- Painting site

---

### PRODUCT BENEFITS

- Robust housing, to be safety working at construction site
- Folding design for twin brightness
- 80% Energy saving compare to halogen
- 5 years warranty

---

### PRODUCT FEATURES

- Lumen efficiency up to 80 Lumen / Watt
  - With outlet sockets, for connecting more lights or electrical tools working at same time
  - Type of protection : IP54
  - Impact resistance: IK08
  - Working temperature: -20° up to +45°
  - Connection via 5 meter cable, H07RN-F 3G x 2.50mm<sup>2</sup>
-

## TECHNICAL DATA


### Electrical data

Nominal wattage	2 x 20 Watt
Operating mode	IC
Nominal Voltage	220 – 240 Volt
Power Factor	>0,9
Mains frequency	50 Hz

### Photometrical data

Color temperature	6400 Kelvin
Luminous flux	3200 lm
Luminous efficiency	80 lm/watt
Color matching / deviation	Blue
Denomination of the color	Cool White
CRI (Color rendering Index Ra)	>80

### Dimension & weight

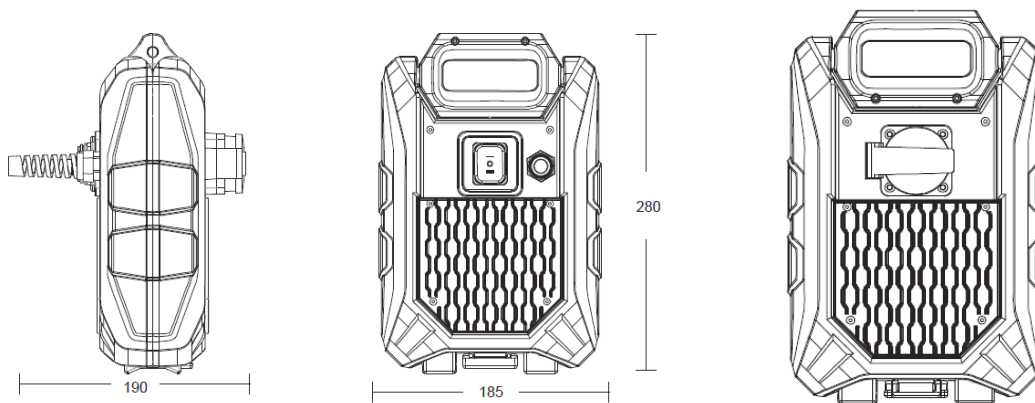

Lenght	280mm
Thikness	190mm
Height	185mm
Weight	2300g
Cable Type and lenght	5m H07RN-F 3G x 2.50mm <sup>2</sup> cbale + VDE plug

### Color & material

Body material	ABS + PC
Product Color	Blue
Housing	Blue
Front Glass	Milky PC cover

### Temperature & operation

Working temperatures	Minus 20° up to 45° Celcius
----------------------	-----------------------------


## Different product data

Mounting location	Floor / Tripod
Dimmable	No
Connection	
LED module	SMD Not replacable
LED Brand	San'an
Driver	IC
Lifetime	25000 at 25° Celcius
ON/OFF tests	100000

## Certifications

Impact protection class	IK08
Glow wire according IEC 695-2-1	
Photobiological safety group EN62778	
Photobiological safety group accessories EN62471	
Protection class	
Insulation protection	IP54
Limited temperature class	
CE Certifications	CE/EMC/LVD/RoHS/IK08

## Light distribution curve

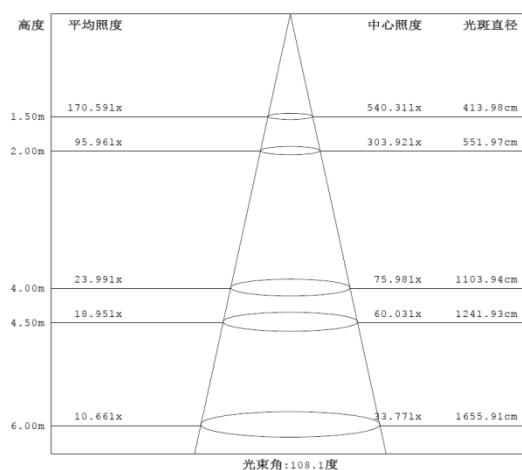

Item	Ean Code	Packaging	Dimensions	Gross Weight
629124420	5420080905494	Carton	61 x 42 x 30.5cm	16.5kg

For all other questions, please contact our commercial division : [info@ethos-europe.com](mailto:info@ethos-europe.com)