

		
TEST REPORT IEC 60598-2-4 Luminaires, Part 2: Particular requirements Section 4: Portable general purpose luminaires		
Report Number..... : 704021872501-00 Date of issue : 2018-08-28 Total number of pages..... : 58		
Name of Testing Laboratory preparing the Report : TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch		
Applicant's name : Cixi Leonlux Technology CO., Ltd Address : BeiSanhuan West Road,Zonghan Street, 315301, Cixi, Ningbo, Zhejiang, People's Republic of China		
Test specification: Standard..... : IEC 60598-2-4:2017 used in conjunction with IEC 60598-1:2014 Test procedure..... : EU-Directive Non-standard test method..... : N/A		
Test Report Form No. : IEC60598_2_4E Test Report Form(s) Originator.... : UL(US) Master TRF : 2017-08-31		
Copyright © 2017 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.		
General disclaimer: The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.		

Test item description..... :	Portable luminaires	
Trade Mark..... :	N/A	
Manufacturer..... :	Same as applicant	
Model/Type reference..... :	99A10; 99A20; 99A30; 99A40; 99A50; 99A10-WO; 99A20-WO; 99A30-WO; 99A40-WO; 99A50-WO; 99AC10; 99AC20; 99AC30; 99AC40; 99AC50; 99AC10-WO; 99AC20-WO; 99AC30-WO; 99AC40-WO; 99AC50-WO; 99R10; 99R20; 99RC10; 99RC20	
Ratings..... :	220-240V~; 50/60Hz; Class I; IP54 details see model list	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/> CB Testing Laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No.151 Heng Tong Road. Shanghai 200070 P.R. China	
Testing location/ address.....:	No. 1999, Duhui Road, Shanghai, 201108, P. R. China	
Tested by (name, function, signature).....:	Jiani WANG	
Approved by (name, function, signature)....:	Huidong ZHANG	
<input type="checkbox"/> Testing procedure: CTF Stage 1:	N/A	
Testing location/ address.....:	N/A	
Tested by (name, function, signature).....:	N/A	
Approved by (name, function, signature)....:	N/A	
<input type="checkbox"/> Testing procedure: CTF Stage 2:	N/A	
Testing location/ address.....:	N/A	
Tested by (name + signature)	N/A	
Witnessed by (name, function, signature)...	N/A	
Approved by (name, function, signature)....:	N/A	
<input type="checkbox"/> Testing procedure: CTF Stage 3:	N/A	
<input type="checkbox"/> Testing procedure: CTF Stage 4:	N/A	
Testing location/ address.....:	N/A	
Tested by (name, function, signature).....:	N/A	
Witnessed by (name, function, signature)...	N/A	
Approved by (name, function, signature)....:	N/A	
Supervised by (name, function, signature) :	N/A	

List of Attachments (including a total number of pages in each attachment): N/A	
Summary of testing: Determination of the test result includes consideration of measurement uncertainty from the test equipment and methods. Representative sample covered by this report has been tested and complies with the applicable requirements of this standard. All applicable hazards are covered by the harmonized standard.	
Tests performed (name of test and test clause): Complete tests on model 99A50 which contain all components and rated highest wattage Construction check and Endurance test are applied on the others IEC/TR 62778 tests are performed on model 99A50, After evaluations on the measurement results, the models are classified as RG0 The test results comply with the requirements.	Testing location: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Summary of compliance with National Differences (List of countries addressed): The deviation between EN 60598-2-4:2018 used in conjunction with EN 60598-1:2015 and IEC 60598-2-4:2017 used in conjunction with IEC 60598-1:2014 is taken into account at the appendix 1 of the report. <input checked="" type="checkbox"/> The product fulfils the requirements of EN 60598-2-4:2018 used in conjunction with EN 60598-1:2015	

Copy of marking plate:

See The latest Data form for electrical equipment and Machinery

Note 1: Height of letter and numeral not less than 2mm, graphical symbol not less than 5mm, WEEE not less than 7mm.

Note 2: The labels of other types are similar with the above, just the different model name and specification.

Test item particulars : Portable luminaires	
Classification of installation and use..... : Normal use	
Supply Connection : supply cords with plugs:	
Possible test case verdicts:	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
Testing :	
Date of receipt of test item..... : 2018-05-23	
Date (s) of performance of tests : 2018-05-23 to 2018-08-28	
General remarks:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Remark: The following contents are included and as appendix of this test report:</p> <ol style="list-style-type: none"> 1) Test report IEC 60598-2-4:2017 used in conjunction with IEC 60598-1:2014. 2) Appendix 1 comprising: European group differences and national differences according to EN 60598-2-4:2018 used in conjunction with EN 60598-1:2015 3) Appendix 2: Requirements of EN 62031:2008/A2:2015 for LED module 4) Appendix 3: Requirements of EN 62493: 2015 5) Appendix 4: Photograph. 6) Data form for electrical equipment and machinery 	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-4:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies)..... : Cixi Leonlux Technology CO., Ltd
BeiSanhuan West Road,Zonghan Street, 315301,
Cixi, Ningbo, Zhejiang, People's Republic of China

General product information and other remarks:

The product covered in this report is portable luminaire.
with “-WO” means without sockets, without “-WO” means with sockets
“AC” means with stands

Model	Wattage	number of LED	LED module
99A10	2x10W	2x42	LN-99GY10W
99A20	2x20W	2x84	LN-99GY20W
99A30	2x30W	2x126	LN-99GY30W
99A40	2x40W	2x126	LN-99GY40W
99A50	2x50W	2x126	LN-99GY50W
99A10-WO	2x10W	2x42	LN-99GY10W
99A20-WO	2x20W	2x84	LN-99GY20W
99A30-WO	2x30W	2x126	LN-99GY30W
99A40-WO	2x40W	2x126	LN-99GY40W
99A50-WO	2x50W	2x126	LN-99GY50W
99AC10	2x10W	2x42	LN-99GY10W
99AC20	2x20W	2x84	LN-99GY20W
99AC30	2x30W	2x126	LN-99GY30W
99AC40	2x40W	2x126	LN-99GY40W
99AC50	2x50W	2x126	LN-99GY50W
99AC10-WO	2x10W	2x42	LN-99GY10W
99AC20-WO	2x20W	2x84	LN-99GY20W
99AC30-WO	2x30W	2x126	LN-99GY30W
99AC40-WO	2x40W	2x126	LN-99GY40W
99AC50-WO	2x50W	2x126	LN-99GY50W
99R10	2x10W	2x30	LN-99GY10W
99R20	2x20W	2x40	LN-99GY20W
99RC10	2x10W	2x30	LN-99GY10W
99RC20	2x20W	2x40	LN-99GY20W

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.4 (0)	GENERAL TEST REQUIREMENTS		P
4.4 (0.1)	Information for luminaire design considered.....:	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Lamp standard: EN 62031	—
4.4 (0.3)	More sections applicable	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—
4.5 (2)	CLASSIFICATION OF LUMINAIRES		P
4.5 (2.2)	Type of protection	Class I	P
4.5 (2.3)	Degree of protection	IP 54	P
4.5 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
4.5.1 (-)	Ordinary luminaire	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
4.5.2 (-)	Portable luminaire for outdoor use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	
4.5.3 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
4.6 (3)	MARKING		P
4.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
4.6 (3.3)	Additional information		P
	Language of instructions		P
4.6 (3.3.1)	Combination luminaires		N/A
4.6 (3.3.2)	Nominal frequency in Hz		P
4.6 (3.3.3)	Operating temperature		N/A
4.6 (3.3.4)	Symbol or warning notice		N/A
4.6 (3.3.5)	Wiring diagram		N/A
4.6 (3.3.6)	Special conditions		N/A
4.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
4.6 (3.3.8)	Limitation for semi-luminaires		N/A
4.6 (3.3.9)	Power factor and supply current		N/A
4.6 (3.3.10)	Suitability for use indoors		N/A
4.6 (3.3.11)	Luminaires with remote control		N/A
4.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
4.6 (3.3.13)	Specifications of protective shields		N/A
4.6 (3.3.14)	Symbol for nature of supply		P
4.6 (3.3.15)	Rated current of socket outlet		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.6 (3.3.16)	Rough service luminaire		N/A
4.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
4.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
4.6 (3.3.19)	Protective conductor current in instructions, if applicable		N/A
4.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
4.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	non-user replaceable	P
	Cautionary symbol		P
4.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
4.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P
4.6.1 (-)	Luminaire not suitable for outdoor application		N/A
	Required symbol		N/A
	Information in the instructions		N/A
4.6.2 (-)	Outdoor use, socket outlet incorporated in the luminaire		P
	Maximum current rating marked		P
	Position of the marking		P
4.7 (4)	CONSTRUCTION		P
4.7 (4.2)	Components replaceable without difficulty		P
4.7 (4.3)	Wireways smooth and free from sharp edges		P
4.7 (4.4)	Lampholders		N/A
4.7 (4.4.1)	Integral lampholder		N/A
4.7 (4.4.2)	Wiring connection		N/A
4.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
4.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- bending test (N)		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
4.7 (4.4.5)	Peak pulse voltage		N/A
4.7 (4.4.6)	Centre contact		N/A
4.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
4.7 (4.4.8)	Lamp connectors		N/A
4.7 (4.4.9)	Caps and bases correctly used		N/A
4.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
4.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
4.7 (4.6)	Terminal blocks		N/A
	Tails		N/A
	Unsecured blocks		N/A
4.7 (4.7)	Terminals and supply connections		P
4.7 (4.7.1)	Contact to metal parts		N/A
4.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
4.7 (4.7.3)	Terminals for supply conductors		P
4.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
4.7 (4.7.4)	Terminals other than supply connection		N/A
4.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
4.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
4.7 (4.8)	Switches		P
	- adequate rating		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- adequate fixing		P
	- polarized supply		P
	- compliance with IEC 61058-1 for electronic switches		N/A
4.7 (4.9)	Insulating lining and sleeves		N/A
4.7 (4.9.1)	Retainment		N/A
	Method of fixing		N/A
4.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)		N/A
4.7 (4.10)	Double or reinforced insulation		P
4.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		P
	Safe installation fixed luminaires		P
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
4.7 (4.10.2)	Assembly gaps:		P
	- not coincidental		P
	- no straight access with test probe		P
4.7 (4.10.3)	Retainment of insulation:		P
	- fixed		P
	- unable to be replaced; luminaire inoperative		P
	- sleeves retained in position		P
	- lining in lampholder		N/A
4.7 (4.10.4)	Protective impedance device		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
4.7 (4.11)	Electrical connections and current-carrying parts		P
4.7 (4.11.1)	Contact pressure		P
4.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- thread-cutting screws		N/A
4.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
4.7 (4.11.4)	Material of current-carrying parts		P
4.7 (4.11.5)	No contact to wood or mounting surface		P
4.7 (4.11.6)	Electro-mechanical contact systems		N/A
4.7 (4.12)	Screws and connections (mechanical) and glands		P
4.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:	fixed enclosure; 0,5Nm	P
	Torque test: torque (Nm); part.....:	Fixed LED module; 0,5Nm	P
	Torque test: torque (Nm); part.....:		N/A
4.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
4.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm)		N/A
	- lampholder; torque (Nm)		N/A
	- push-button switches; torque 0,8 Nm		N/A
4.7 (4.12.5)	Screwed glands; force (Nm)		N/A
4.7 (4.13)	Mechanical strength		P
4.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)		N/A
	- other parts; energy (Nm)	0,5	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
4.7 (4.13.3)	Straight test finger		N/A
4.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7 (4.13.6)	Tumbling barrel		N/A
4.7 (4.14)	Suspensions, fixings and means of adjusting		P
4.7 (4.14.1)	Mechanical load:		N/A
	A) four times the weight		N/A
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
4.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		N/A
	Bending moment (Nm) of semi-luminaire		N/A
4.7 (4.14.3)	Adjusting devices:		P
	- flexing test; number of cycles.....	150	P
	- strands broken		P
	- electric strength test afterwards		P
4.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
4.7 (4.14.5)	Guide pulleys		N/A
4.7 (4.14.6)	Strain on socket-outlets		N/A
4.7 (4.15)	Flammable materials		P
	- glow-wire test 650°C.....	See Test Table 4.15 (13.3.2)	N/A
	- spacing ≥30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
4.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	c) surface temperature		N/A
4.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear:	(compliance with Section 12)	N/A
4.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
4.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
4.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
4.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
4.7 (4.18)	Resistance to corrosion		N/A
4.7 (4.18.1)	- rust-resistance		N/A
4.7 (4.18.2)	- season cracking in copper		N/A
4.7 (4.18.3)	- corrosion of aluminium		N/A
4.7 (4.19)	Igniters compatible with ballast		N/A
4.7 (4.20)	Rough service vibration		N/A
4.7 (4.21)	Protective shield		N/A
4.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
4.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
4.7 (4.21.3)	No direct path		N/A
4.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment:	See Test Table 4.15 (13.3.2)	N/A
4.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
4.7 (4.23)	Semi-luminaires comply Class II		N/A
4.7 (4.24)	Photobiological hazards		P
4.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
4.7 (4.24.2)	Retinal blue light hazard		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Class of risk group assessed according to IEC/TR 62778	RG0 Lb: 28,19W/m ² /sr	—
	Luminaires with E_{thr} :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2....:		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		P
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
4.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		N/A
4.7 (4.26)	Short-circuit protection		N/A
4.7 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
4.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
4.7 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
4.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material (°C)		—
	100 cycles between t min and t max		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature sensing control still in position		N/A
4.7 (4.29)	Luminaires with non-replaceable light source		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
4.7 (4.30)	Luminaires with non-user replaceable light source		P
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		P
	Minimum two fixing means		P
4.7 (4.31)	Insulation between circuits		P
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
4.7 (4.31.1)	SELV circuits		N/A
	Used SELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of SELV circuits from LV supply		N/A
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
4.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
4.7 (4.31.3)	Other circuits		P
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
4.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A
4.7.1 (-)	Insulation not damaged when placing on support		P
4.7.2 (-)	Wiring fixed, to avoid rubbing		P
4.7.3 (-)	Luminaire not overturn at angle 6°		N/A
	Outdoor use luminaire not overturn at an angle 15°		P
4.7.4 (-)	Candlestick luminaires with E5 or E10 lampholders provided with a switch		N/A
	Switch part of the luminaire or within 300 mm of the luminaire if with cord		N/A
4.7.5 (-)	Voltage not exceed 25 V for E5 lampholders		N/A
	E10 lampholder voltage not exceed:		—
	60 V for series connection) or		N/A
	250 V for parallel connections		N/A
	Maximum rated wattage not exceed 100 W		N/A
4.7.6 (-)	Portable luminaires for outdoor use tails not provided		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.7.7 (-)	Portable luminaires for outdoor use, cable entries		P
4.7.8 (-)	Portable luminaires for outdoor use, socket-outlet degree of protection at least IPX4.		P
	Degree of protection maintained with or without a plug inserted into the socket-outlet.		P
	Class II luminaires, mains socket-outlets, connection only to Class II luminaires.		N/A
	Class I luminaires, mains socket-outlets, connection only to Class I luminaires.		P
4.7.9 (-)	Portable luminaires for outdoor use, lampholders and plugs are of material resistant to tracking		P
	Compliance to clause 13.4		P
4.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
4.8 (11.2)	Creepage distances and clearances	See Table 4.7 (11.2)	P
	Impulse withstand category (Normal category II) (Category III Annex U, Table U.1)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—

4.9 (7)	PROVISION FOR EARTHING		P
4.9 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 Ω	0,072	P
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a grove		N/A
	Earth makes contact first		P
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
4.8 (7.2.2 + 7.2.3)	Earth continuity in joints, etc.		P
4.9 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		N/A
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
4.9 (7.2.5)	Earth terminal integral part of connector socket		N/A
4.9 (7.2.6)	Earth terminal adjacent to mains terminals		N/A
4.9 (7.2.7)	Electrolytic corrosion of the earth terminal		N/A
4.9 (7.2.8)	Material of earth terminal		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Contact surface bare metal		P
4.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
4.9 (7.2.11)	Earthing core coloured green-yellow		P
	Length of earth conductor		P
4.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A
4.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		P
	Separately approved; component list	(see Annex 1)	P
	Part of the luminaire	(see Annex 4)	N/A
4.11 (5)	EXTERNAL AND INTERNAL WIRING		P
4.11 (5.2)	Supply connection and external wiring		P
4.11 (5.2.1)	Means of connection.....	supply cords with plugs	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		P
4.11 (5.2.2)	Type of cable.....	H05RN-F/H07RN-F	P
	Nominal cross-sectional area (mm ²).....	3x1,0/1,5mm ²	P
	Cables equal to IEC 60227 or IEC 60245		P
4.11 (5.2.3)	Type of attachment, X, Y or Z		P
4.11 (5.2.5)	Type Z not connected to screws		P
4.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
4.11 (5.2.7)	Cable entries through rigid material have rounded edges		P
4.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
4.11 (5.2.9)	Locking of screwed bushings		N/A
4.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		N/A
4.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
4.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		P
4.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N): 60/80		P
	- torque test: torque (Nm).....: 0,25/0,35		P
	- displacement ≤ 2 mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
4.11 (5.2.11)	External wiring passing into luminaire		P
4.11 (5.2.12)	Looping-in terminals		N/A
4.11 (5.2.13)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
4.11 (5.2.14)	Mains plug same protection		P
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
4.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Other appliance inlet or connector according relevant IEC standard		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
4.11 (5.2.18)	Used plug in accordance with		P
	- IEC 60083		N/A
	- other standard		P
4.11 (5.3)	Internal wiring		P
4.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)		N/A
	- temperatures	(see Annex 2)	N/A
	Green-yellow for earth only		N/A
4.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm ²)	see annex 1	P
	Insulation thickness		P
	Extra insulation added where necessary		N/A
4.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		N/A
	Adequate cross-sectional area and insulation thickness		N/A
4.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
4.11 (5.3.1.4)	Conductors without insulation		N/A
4.11 (5.3.1.5)	SELV current-carrying parts		N/A
4.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
4.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		P
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
4.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
4.11 (5.3.4)	Joints and junctions effectively insulated		N/A
4.11 (5.3.5)	Strain on internal wiring		N/A
4.11 (5.3.6)	Wire carriers		N/A
4.11 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
4.11.1 (-)	Indoor use luminaire The requirement of one part of cord anchorage to be fixed to the luminaire not applied for table lamps of glass or ceramic		—
4.11.2 (-)	Class I and class II indoor use Luminaire with a mass less than 1 kg the current $\leq 2,5$ A and cable ≤ 2 m and conductor $\geq 0,5$ mm ²		N/A
4.11.3 (-)	Portable luminaire for outdoor use delivered without a flexible cable or cord and a plug		N/A
	Terminals, a cord anchorage and an inlet opening for the proper connection of the flexible cable or cord.		N/A
4.11.4 (-)	Portable luminaires for outdoor use Insulation class I and class II, non-detachable flexible cables or cords at least type 245 IEC 57.		P
4.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
4.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		P
	Basic insulated parts not accessible with $\varnothing 50$ mm probe from outside, other types of luminaires		N/A
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		P
	Basic insulation only accessible under lamp or starter replacement		P
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		N/A
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		P
4.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement		N/A
	- glass protective shields not used as supplementary insulation		N/A
4.12 (8.2.3.b)	BC lampholder of metal in class I luminaires is earthed		N/A
4.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load (V)		N/A
	- no-load voltage (V)		N/A
	- touch current if applicable (mA)		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- nominal voltage (V)		N/A
	Class III luminaire only for connection to SELV		N/A
	Class III luminaire not provided with means for protective earthing		N/A
4.12 (8.2.4)	Portable luminaire have protection independent of supporting surface		P
4.12 (8.2.5)	Compliance with the standard test finger or relevant probe		N/A
4.12 (8.2.6)	Covers reliably secured		N/A
4.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 μ F not exceed 50 V 1 min after disconnection		N/A
	Portable luminaire with capacitor > 0,1 μ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 μ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A
4.12.1 (-)	Class I luminaire with bayonet lampholder:		N/A
	1) cap not accessible with test finger		N/A
	2) metal lampholder is earthed		N/A

IEC 60598-2-4			
Clause	Requirement + Test		Verdict
4.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
4.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) specified in 4.13		—
4.13 (12.3)	Endurance test:		P
	- mounting-position	Normal mounting position	—
	- test temperature (°C)	35	—
	- total duration (h)	240	—
	- supply voltage: Un factor; calculated voltage (V) ...:	264	—
	- lamp used	LED module	—
4.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		P
	- marking legible		P
	- no cracks, deformation etc.		P
4.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
4.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	N/A
4.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
4.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A
	- calculated mounting surface temperature (°C)		N/A
	- track-mounted luminaires		N/A
4.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C).....:		N/A
	- track-mounted luminaires		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
4.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
4.13 (12.7.1)	Luminaire without temperature sensing control		N/A
4.13 (12.7.1.1)	Luminaire with fluorescent lamp $\leq 70W$		N/A
	Test method 12.7.1.1 or Annex W		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions		—
	- Ballast failure at supply voltage (V)		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test..... :	See Table 4.15 (13.2.1)	N/A
4.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp $> 70W$, transformer $> 10 VA$		N/A
	- case of abnormal conditions		—
	- measured winding temperature (°C): at 1,1 Un		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un		—
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test..... :	See Table 4.15 (13.2.1)	N/A
4.13 (12.7.1.3)	Luminaire with short circuit proof transformers $\leq 10 VA$		N/A
	- case of abnormal conditions		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
4.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link..... :	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out..... :	Yes <input type="checkbox"/> No <input type="checkbox"/>	—

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- auto reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions		—
	- highest measured temperature of fixing point/ exposed part (°C):		—
	Ball-pressure test:.....	See Table 4.15 (13.2.1)	N/A
4.13 (-)	Indoor use luminaire, Test overturned position (overturns < 15°)		N/A
4.14 (9)	RESISTANCE TO DUST AND MOISTURE		P
4.14 (-)	If IP > IP 20 the order of tests as specified in clause 4.12		P
4.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		
	- classification according to IP.....	IP 54	—
	- mounting position during test	Normal position	—
	- fixing screws tightened; torque (Nm)	2/3 torque	—
	- tests according to clauses	(cl 9.2.0 & cl 9.2.5)	—
	- electric strength test afterwards	(see cl 10.2.2)	P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	c.1) For luminaires without drain holes – no water entry		N/A
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight or pressure watertight luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		P
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		P
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		N/A
4.14 (9.3)	Humidity test 48 h		P
4-14 (-)	Portable luminaire for outdoor use tested in the most unfavourable of the overturned positions likely to occur		P
4.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
4.15 (10.2.1)	Insulation resistance test		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø		—
	Insulation resistance (MΩ)		—
	SELV		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface		N/A
	- between current-carrying parts and metal parts of the luminaire		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P
	- between live parts of different polarity	>500 MΩ	P
	- between live parts and mounting surface	>500 MΩ	P
	- between live parts and metal parts	>500 MΩ	P
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
4.15 (10.2.2)	Electric strength test		P
	Dummy lamp		P
	Luminaires with ignitors after 24 h test		P
	Luminaires with manual ignitors		P
	Test voltage (V)		P
	SELV		N/A
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface		N/A
	- between current-carrying parts and metal parts of the luminaire		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
	- between live parts of different polarity	1480V	P
	- between live parts and mounting surface	1480V / 2960V	P
	- between live parts and metal parts.....	2960V	P
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
4.15 (10.3)	Touch current or protective conductor current (mA):	0,1	P
4.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
4.16 (13.2.1)	Ball-pressure test.....	See Test Table 4.15 (13.2.1)	P
4.16 (13.3.1)	Needle-flame test (10 s)	See Test Table 4.15 (13.3.1)	P
4.16 (13.3.2)	Glow-wire test (650°C).....	See Test Table 4.15 (13.3.2)	P
4.16 (13.4)	Proof tracking test (IEC 60112)	See Test Table 4.15 (13.4)	P

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

4.7 (11.2)	TABLE: Creepage distances and clearances						P
	Minimum distances (mm) for a.c. (50/60 Hz) sinusoidal voltages						P
	Applicable part of IEC 60598-1 Table 11.1* and 11.2*						P
	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	3	1,5	11.1	3	2,5	11.1
Working voltage (V)					220-240		—
PTI					< 600 ☒ ≥ 600 ☐		—
Pulse voltage if applicable (kV)							—
Supplementary information: L, N							
Distance 2:	R	>10	3	11.1	>10	5	11.1
Working voltage (V)					220-240		—
PTI					< 600 ☒ ≥ 600 ☐		—
Pulse voltage if applicable (kV)							—
Supplementary information: live part to accessible part							
Distance 3:	B	3	1,5	11.1	3	2,5	11.1
Working voltage (V)					220-240		—
PTI					< 600 ☒ ≥ 600 ☐		—
Pulse voltage if applicable (kV)							—
Supplementary information: live part to metal part							
Supplementary information: ** Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.							

4.15a (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm):		2		—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	see annex 1	86	1,2	
Closed-end connector	see annex 1	125	1,0	
Handle	see annex 1	75	1,0	
Iampholder	see annex 1	93	0,8	
Supplementary information:				

IEC 60598-2-4					
Clause	Requirement + Test			Result - Remark	Verdict
4.15b (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				P
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Closed-end connector	see annex 1	10s	No	No burning	P
Supplementary information:					

4.15c (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				P
Glow wire temperature		650°C			—
Object/ Part No./ Material	Manufacturer/ trademark	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
Enclosure	see annex 1	No	No burning	P	
Handle	see annex 1	No	No burning	P	
lampholder	see annex 1	No	No burning	P	
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No)					yes
Supplementary information:					

4.15d (13.4)	TABLE: Proof tracking test (IEC 60112)				P
Test voltage PTI		175 V			—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Plug	see annex 1	P	P	P	P
Supplementary information:					

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1		TABLE: Critical components information					
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾	
(See The latest Date form for electrical equipment and Machinery)							
Description:							
Description:							
Description:							
Description:							
Supplementary information:							
1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.							
The codes above have the following meaning:							
A - The component is replaceable with another one, also certified, with equivalent characteristics							
B - The component is replaceable if authorised by the test house							
C - Integrated component tested together with the appliance							
D - Alternative component							

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12		P				
	Type reference	99A50	—				
	Lamp used.....	Original LED bulb	—				
	Lamp control gear used	Integral LED module	—				
	Mounting position of luminaire.....	Normal position	—				
	Supply wattage (W)	4,146x10 ³	—				
	Supply current (A).....	16,248	—				
	Calculated power factor	N/A	—				
	Table: measured temperatures corrected for ta = 25 °C:		P				
	- abnormal operating mode	N/A	—				
	- test 1: rated voltage	N/A	—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage.....	1,06Un	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	1,06Un	—				
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....	N/A	—				
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	—				
Temperature measurements, (°C)							
Part	Ambient	Clause 12.4 – normal				Clause 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
supply cord	25	-	59,6	-	90	-	-
supply cord (stress)	25	-	52,1	-	75	-	-
socket	25	-	-	48,9	Ref.	-	-
switch	25	-	36,7	-	55	-	-
handle	25	-	29,0	-	75	-	-
enclosure	25	-	60,6	-	Ref.	-	-
lampshade	25	-	68,1	-	Ref.	-	-
internal wire	25	-	82,1	-	90	-	-
LED module	25	-	89,3	-	Ref.	-	-
closed end connector	25	-	68,8	-	Ref.	-	-
mounting surface	25	-	31,1	-	90	-	-

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal.....:		—
	Rated current (A)		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)		—
(14.3.3)	Conductor space (mm)		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread)	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm)		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-4			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 4	Screwless terminals (part of the luminaire)		N/A
(15)	SCREWLESS TERMINALS		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A).....:		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples).....:		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A

IEC 60598-2-4											
Clause	Requirement + Test						Result - Remark				Verdict
15.6.2	Mechanical tests										N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)										N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N)										N/A
(15.6.3)	Electrical tests										N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N/A
(15.6.3.1) (15.6.3.2)	TABLE: Contact resistance test / Heating tests										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)..... :										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)											
Supplementary information:											

IEC60598_2_4D – Appendix 1			
Clause	Requirement + Test	Result - Remark	Verdict

<p align="center">ATTACHMENT TO TEST REPORT IEC 60598-2-4 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Luminaires Part 2: Particular requirements Section 4: Portable general purpose luminaires</p>			
Differences according to EN 60598-2-4:2018 used in conjunction with EN 60598-1:2015			
Annex Form No. EU_GD_IEC60598_2_4D			
Annex Form Originator OVE			
Master Annex Form 2017-11-10			
Copyright © 2017 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			

	CENELEC COMMON MODIFICATIONS (EN)	P
--	--	----------

4.5 (3)	MARKING	P
4.5 (3.3.101)	For luminaires not supplied with terminal block: Adequate warning on the package	P

4.6 (4)	CONSTRUCTION	N/A
4.6 (4.11.6)	Electro-mechanical contact systems	N/A

4.10 (5)	EXTERNAL AND INTERNAL WIRING	N/A
4.10 (5.2.1)	Connecting leads	N/A
	- without a means for connection to the supply	N/A
	- terminal block specified	N/A
	- relevant information provided	N/A
	- compliance with 4.6, 4.7.1, 4.7.2, 4.10.1, 11.2, 12 and 13.2 of Part 1	N/A
4.10 (5.2.2)	Cables equal to EN 50525	N/A
	Replace table 5.1 – Supply cord	N/A

4.12 (12)	ENDURANCE TESTS AND THERMAL TESTS	P
4.12 (12.4.2c)	Thermal test (normal operation) see footnote c to table 12.2 relating to unsleeved fixed wiring	P

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)	N/A
-----------	---	------------

IEC60598_2_4D – Appendix 1			
Clause	Requirement + Test	Result - Remark	Verdict

(3.3)	DK: power supply cords of class I luminaires with label		N/A
(4.5.1)	DK: socket-outlets		N/A
(5.2.1)	CY, DK, FI, GB: type of plug		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		N/A
(4 & 5)	FR: Shuttered socket-outlets 10/16A		N/A
	FR: Safety requirements for high buildings (Arrêté du 30 décembre 2011 portant règlement de sécurité pour la construction des immeubles de grande hauteur et leur protection contre les risques d'incendie et de panique; Section VIII; Article GH 48, Eclairage) Glow-wire test for outer parts of luminaires:		N/A
	- 850°C for luminaires in stairways and horizontal travel paths		N/A
	- 650°C for indoor luminaires		N/A
(13.3)	GB: Requirements according to United Kingdom Building Regulation		N/A

Appendix 2 - Requirements of EN 62031:2008/A2: 2015			
Clause	Requirement + Test	Result - Remark	Verdict

6	CLASSIFICATION		P
	Built-in module	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Independent module	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral module	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	For Integral module; Note to 1.2.1 in IEC 60598-1 applies.		P

13(14)	FAULT CONDITIONS		P
- (14)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	P
- (14.1)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (except between live parts and accessible metal parts)	(see appended table)	N/A
	Creepage distances on printed boards less than specified in clause 16 in Part 1 provided with coating according to IEC 60664-3		N/A
- (14.2)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.3)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.4)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
- (14.5)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1 \text{ M}\Omega$	$> 100 \text{ M}\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.6)	Relevant fault condition tests with high-power supply		—
13.2	Module withstands overpower condition $>15 \text{ min.}$		P

Appendix 2 - Requirements of EN 62031:2008/A2: 2015			
Clause	Requirement + Test	Result - Remark	Verdict

	Module with automatic protective device or power limiter, test performed 15 min. at limit.		P
	During the tests, tissue paper, spread below module, does not ignite		P

14	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
LED bulb	Short circuit: Lighting not work		No
DB	Short circuit: Lighting not work		No
Capacitor	Short circuit: Lighting not work		No

Appendix 3 - Requirements of EN 62493:2015			
Clause	Requirement + Test	Result - Remark	Verdict
4	LIMITS		P
4.1	General		P
	Comply with Van der Hoofden test limit in 4.2.3 or inherently compliant in 4.2.2 and pass assessment procedure for intentional radiators in 4.3		P
4.2	Unintentional radiating part of lighting equipment		P
4.2.2	Lighting equipment deemed to comply with the Van der Hoofden test without testing		P
	1) electronic controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	2) incandescent-lamp technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	3) LED-light-source technology	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	4) OLED-light-source technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	5) high-pressure discharge lamp LED-light-source technologies	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	6) low-pressure discharge lamp technologies with exposure distance ≥ 50 cm	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	7) independent auxiliary	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Not fulfil any of 1-7 above subject to 4.2.3		—
4.2.3	Applications of limits		N/A
	Not fulfil any of 1-7 in 4.2.2 but the compliance factor F is ≤ 1		N/A
4.3	Intentional radiating part of lighting equipment		N/A
	Comply with one of methods in Clause 7 if intentional radiator		N/A
5	GENERAL		N/A
6	MEASUREMENT PROCEDURE FOR THE VAN DER HOOFDEN TEST		N/A
7	ASSESSMENT PROCEDURE INTENTIONAL RADIATORS		N/A

Appendix 4 - Photographs

99A50



99A50

Appendix 4 - Photographs

99A50-WO



99A50-WO

Appendix 4 - Photographs




AC series



AC series

Appendix 4 - Photographs

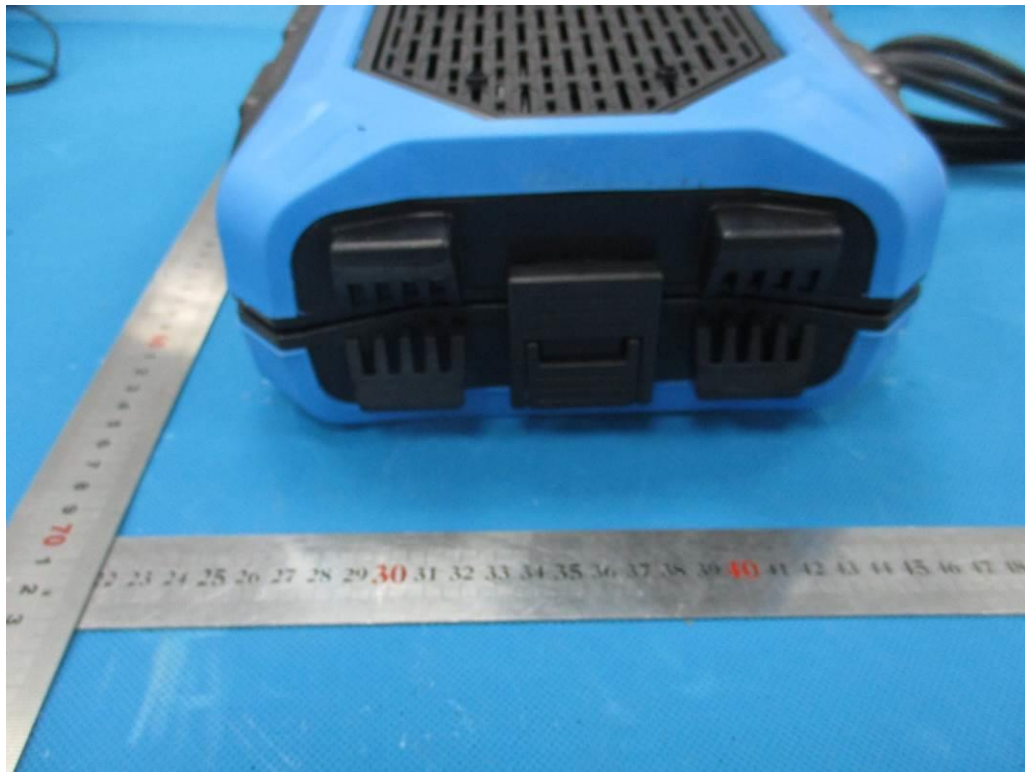

Bottom view



Plug

Appendix 4 - Photographs



Cable entry



Cable entry

Appendix 4 - Photographs



Switch



Socket

Appendix 4 - Photographs



Socket




Open view

Appendix 4 - Photographs




Normal use

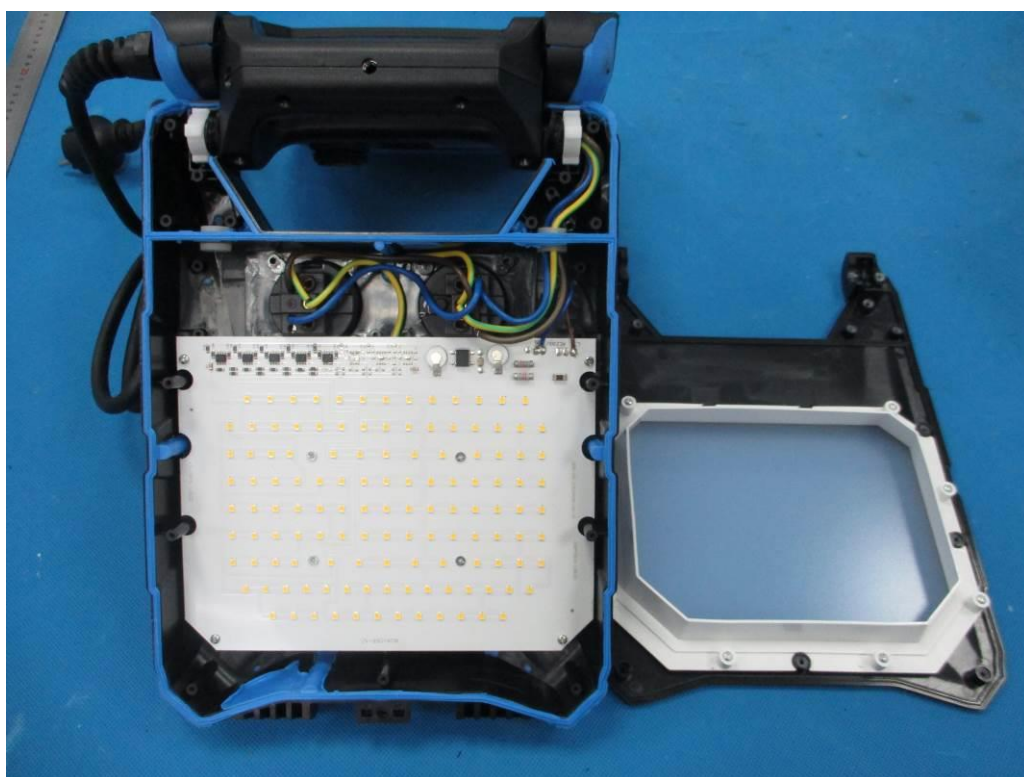


Open view for socket side

Appendix 4 - Photographs

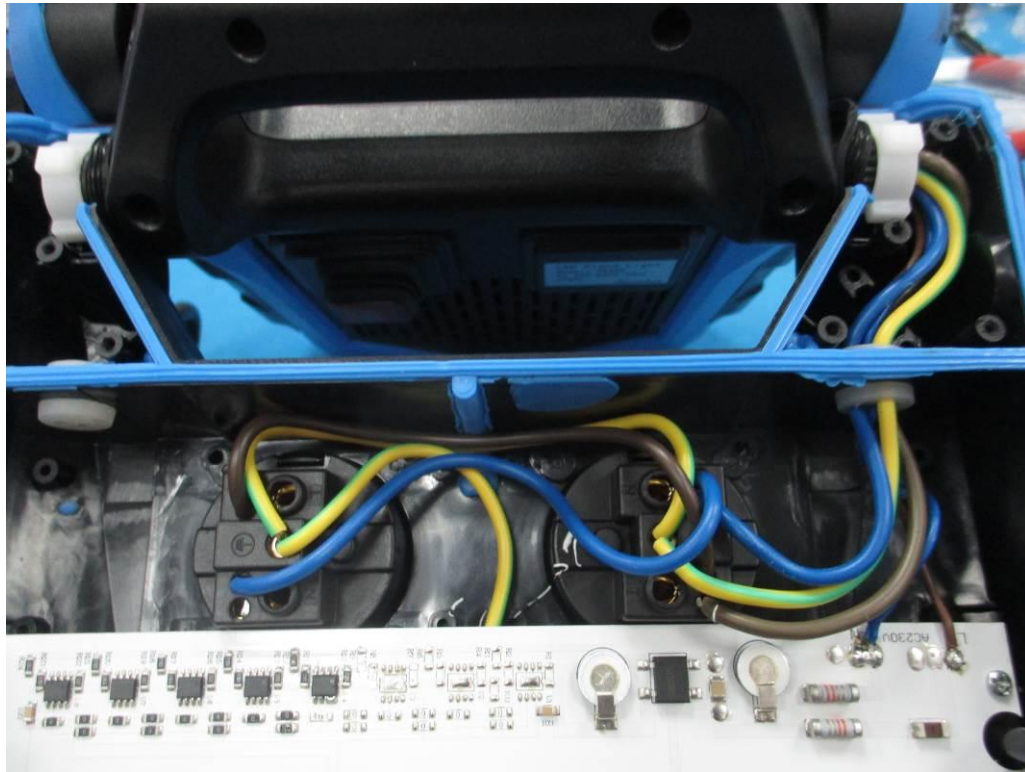


Internal wire

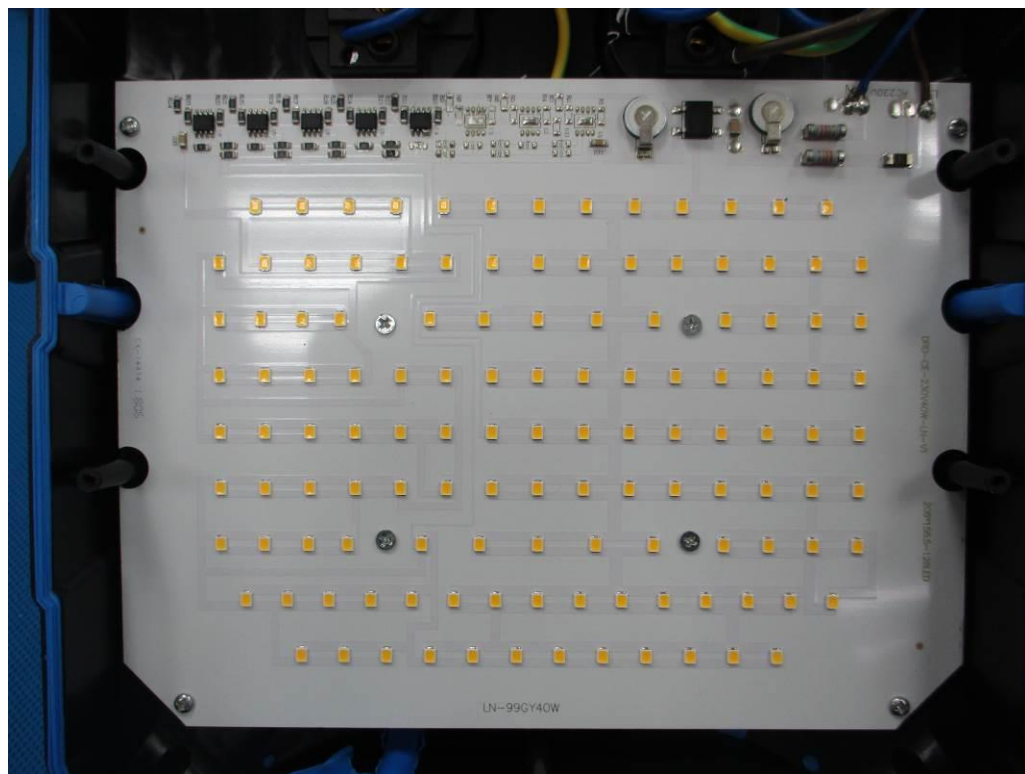


50W LED module

Appendix 4 - Photographs

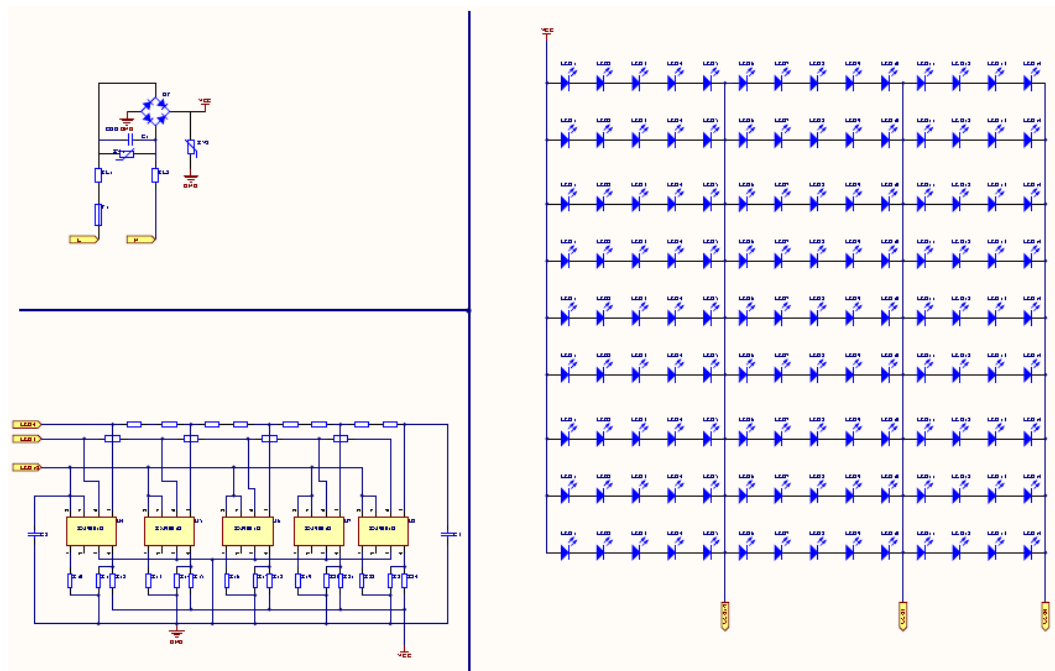


Original circuit

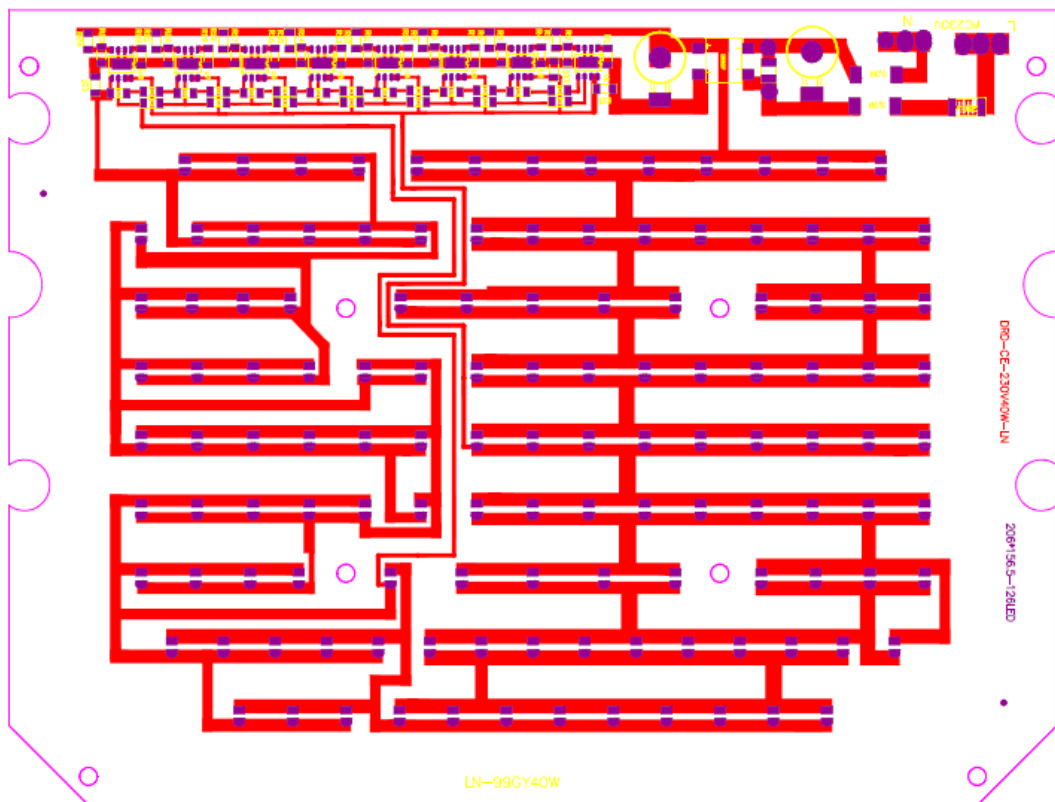


PCB layout

Appendix 4 - Photographs

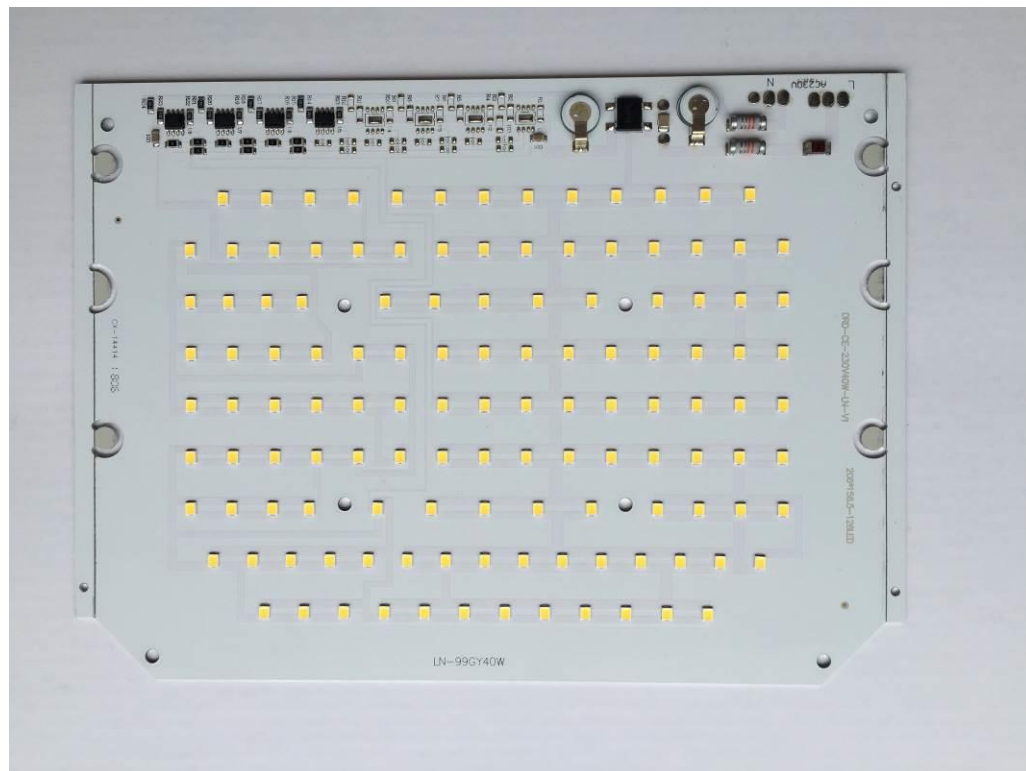


40W LED module

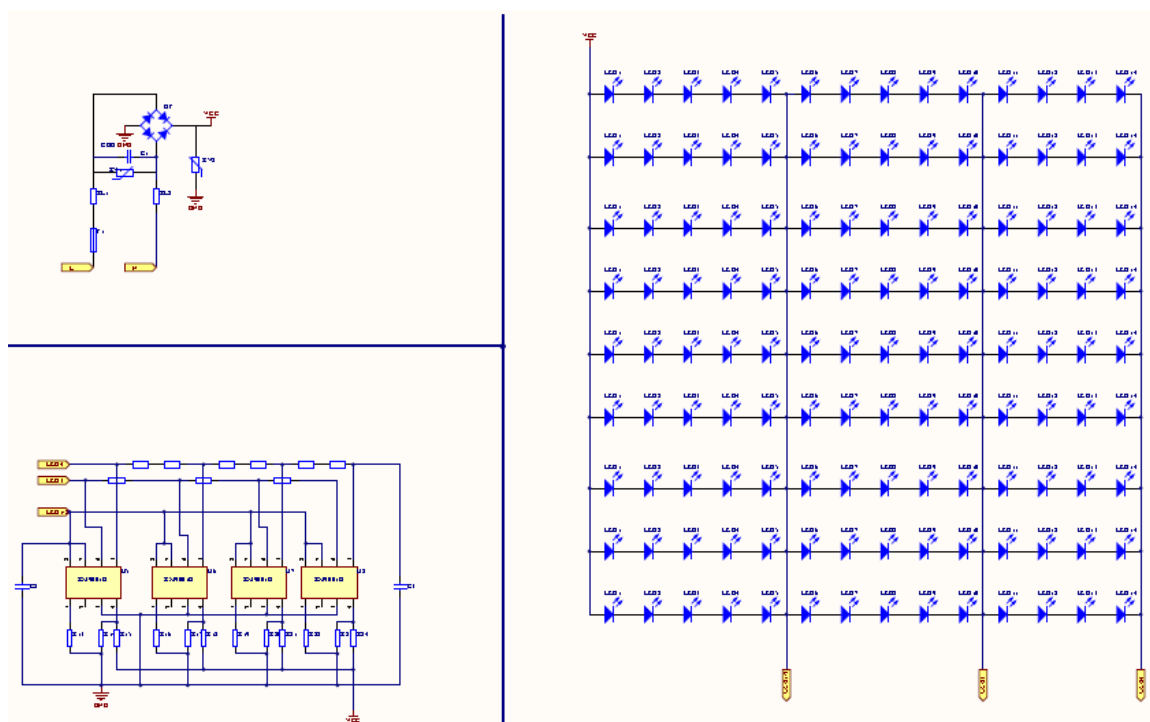


Original circuit

Appendix 4 - Photographs

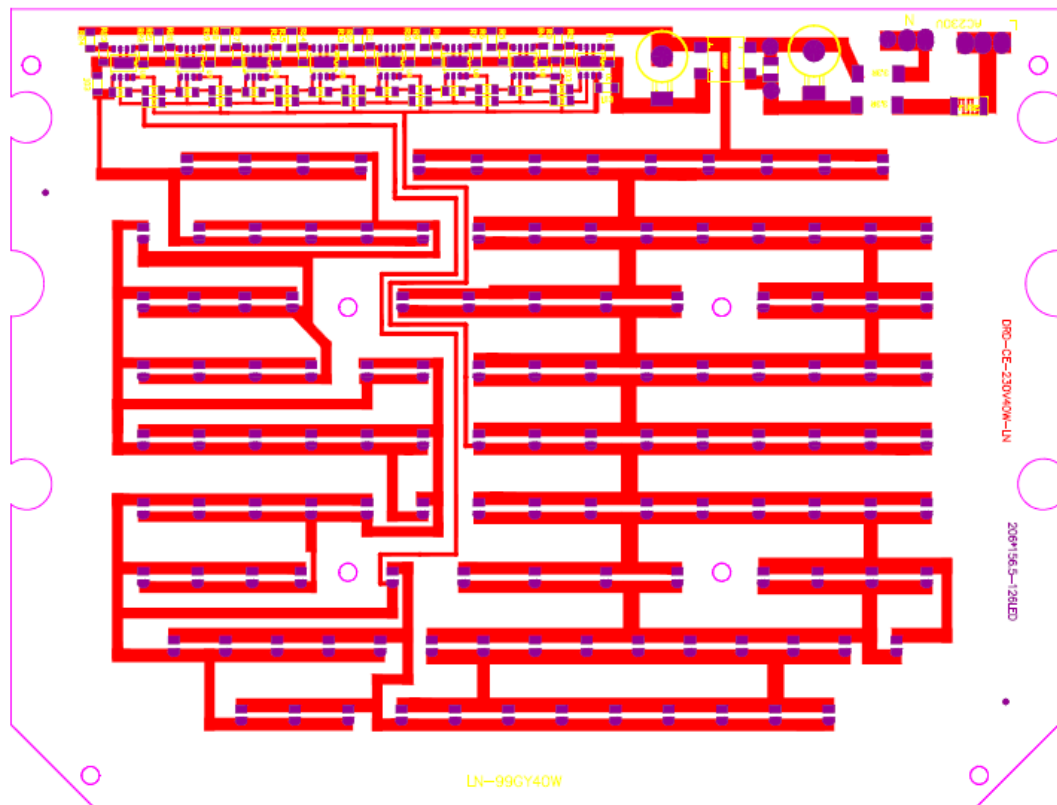


PCB layout

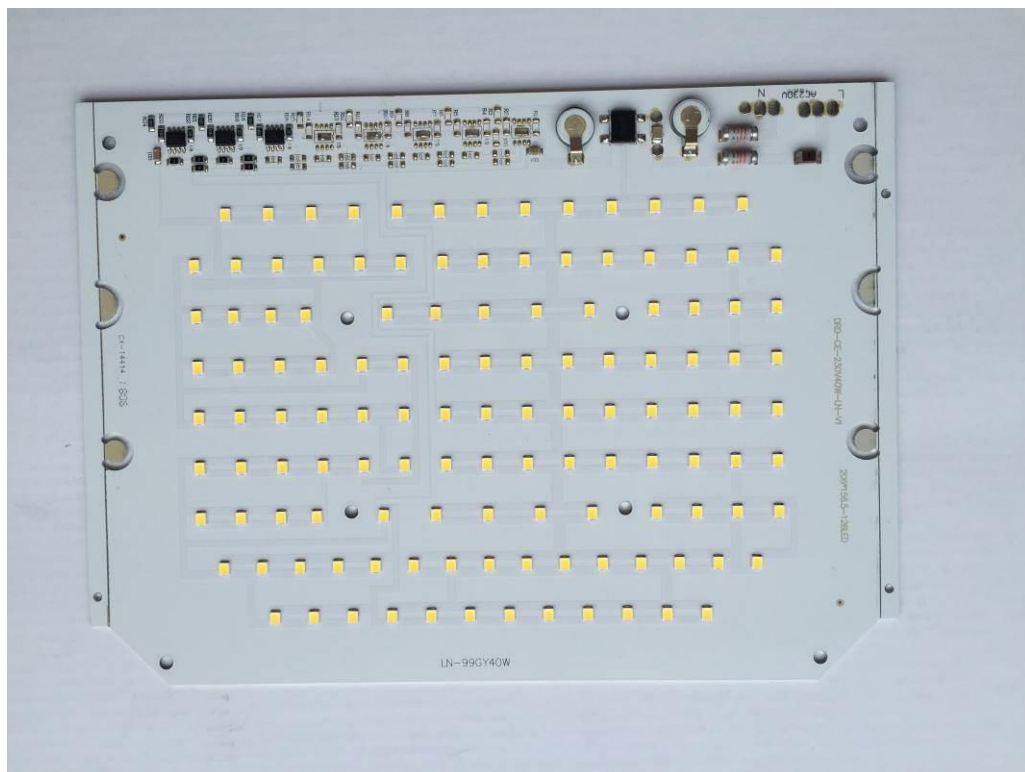


30W LED module

Appendix 4 - Photographs

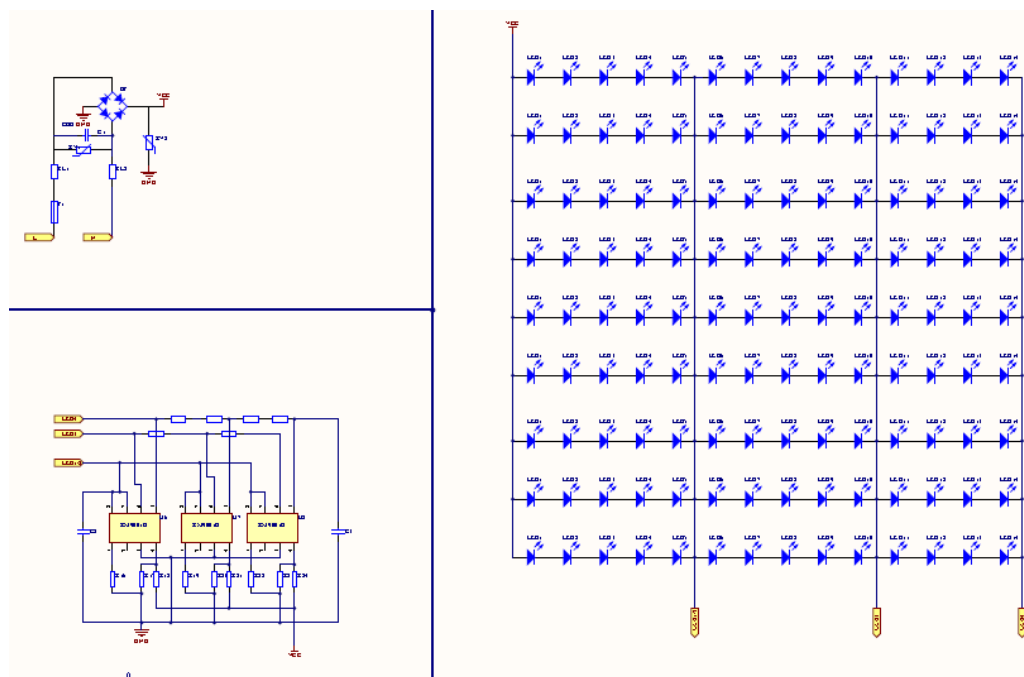

Original circuit

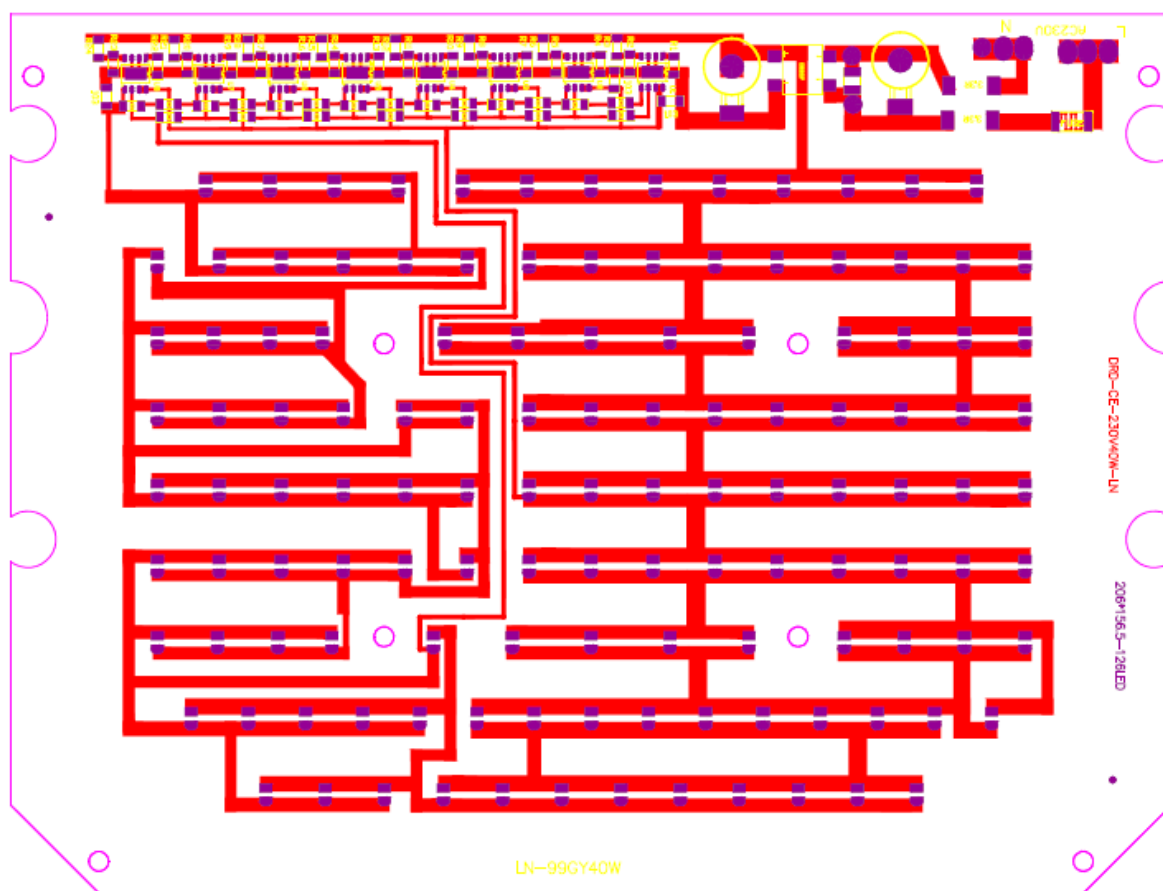


PCB layout


Appendix 4 - Photographs



20W LED module

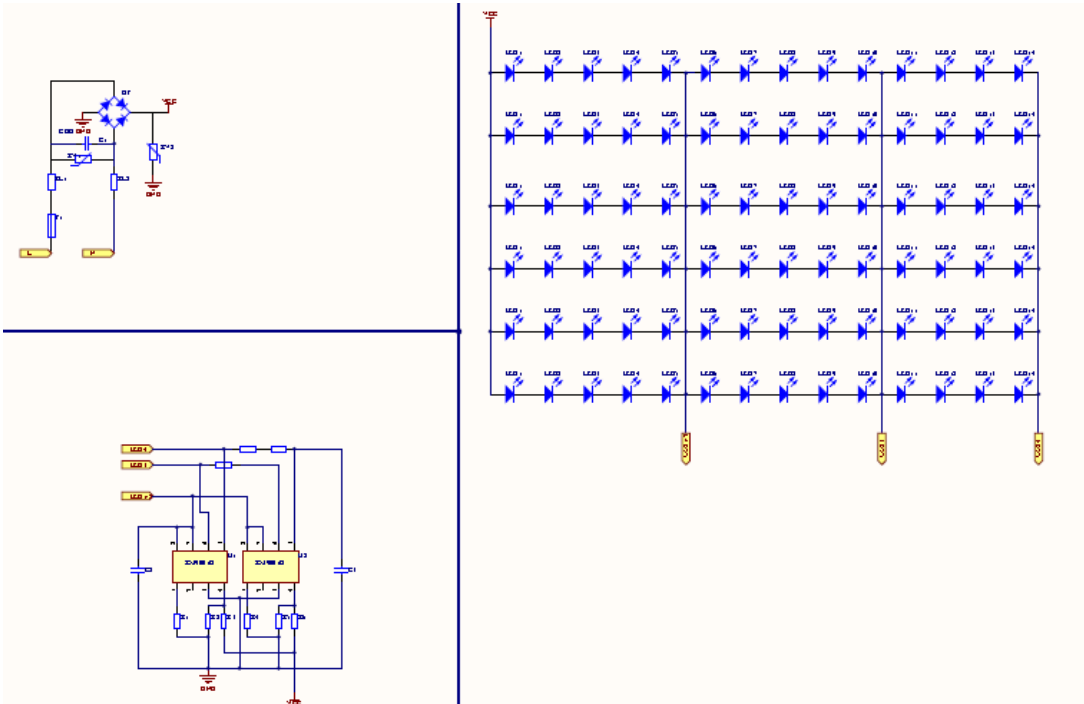

Original circuit

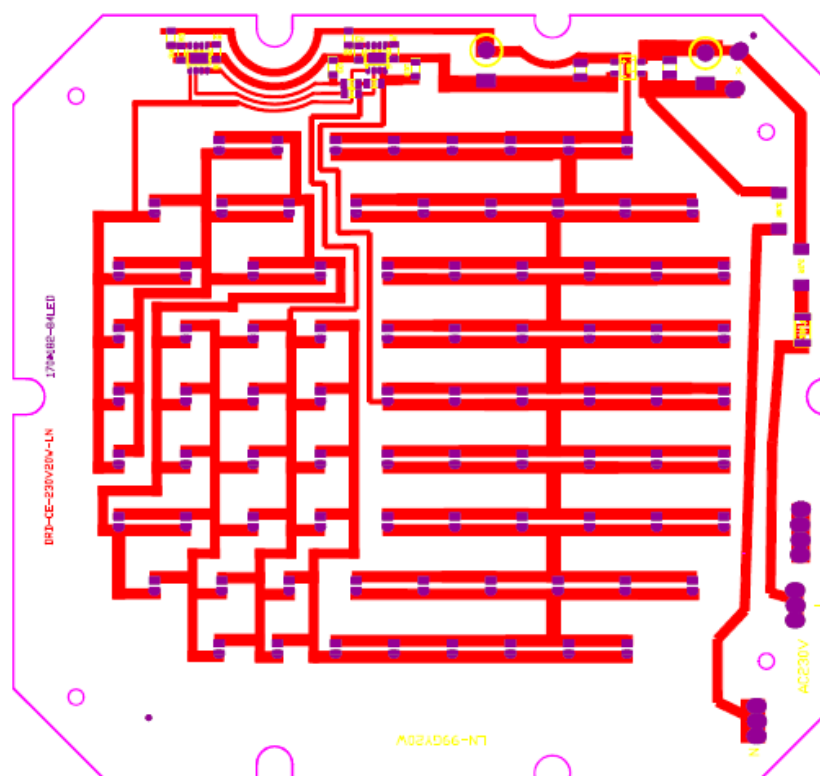
Appendix 4 - Photographs

PCB layout




10W LED module

Appendix 4 - Photographs

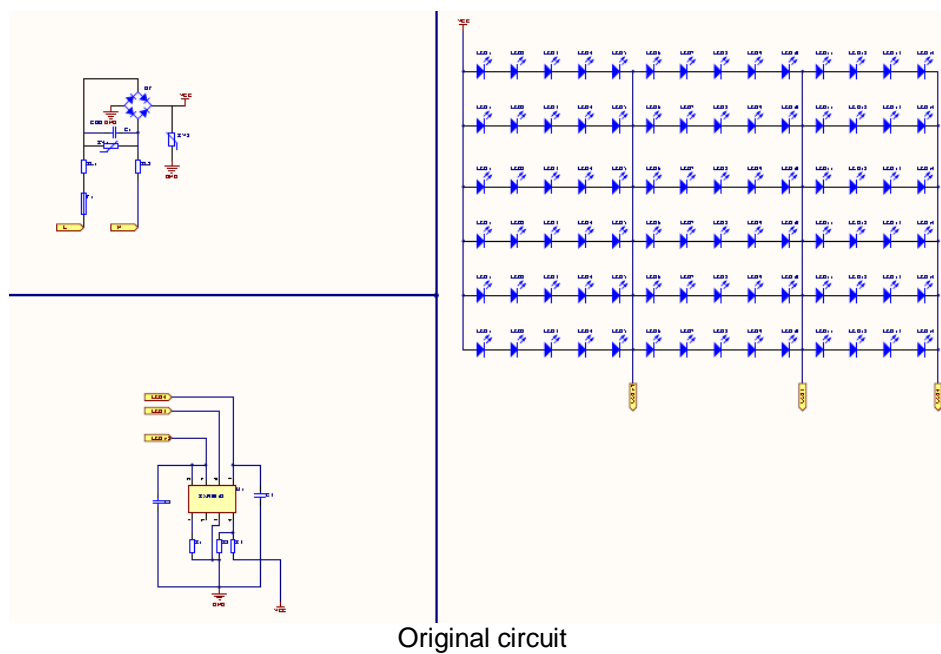


Original circuit

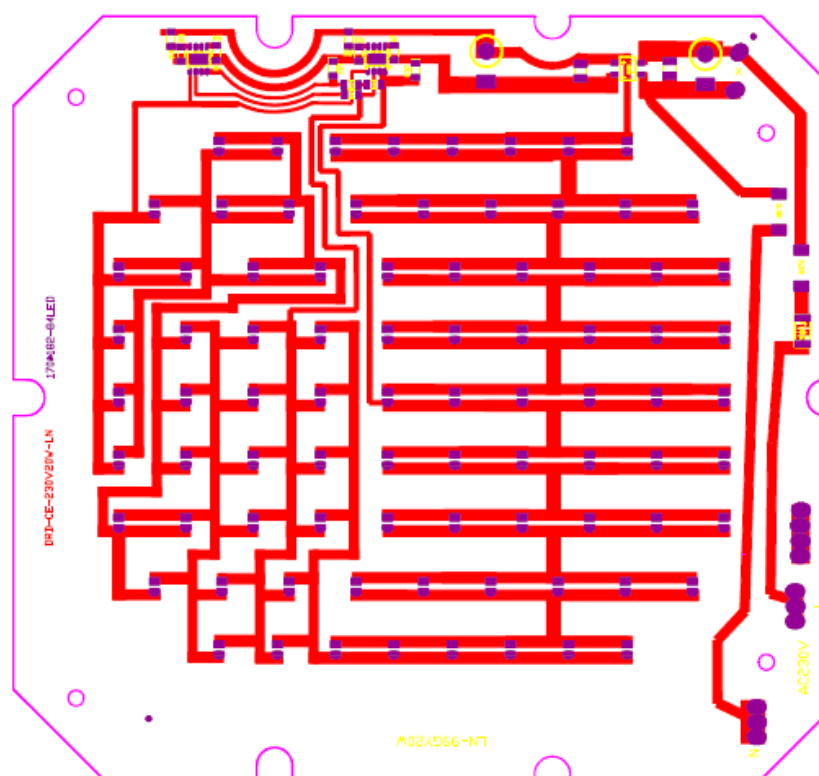


PCB layout

Appendix 4 - Photographs

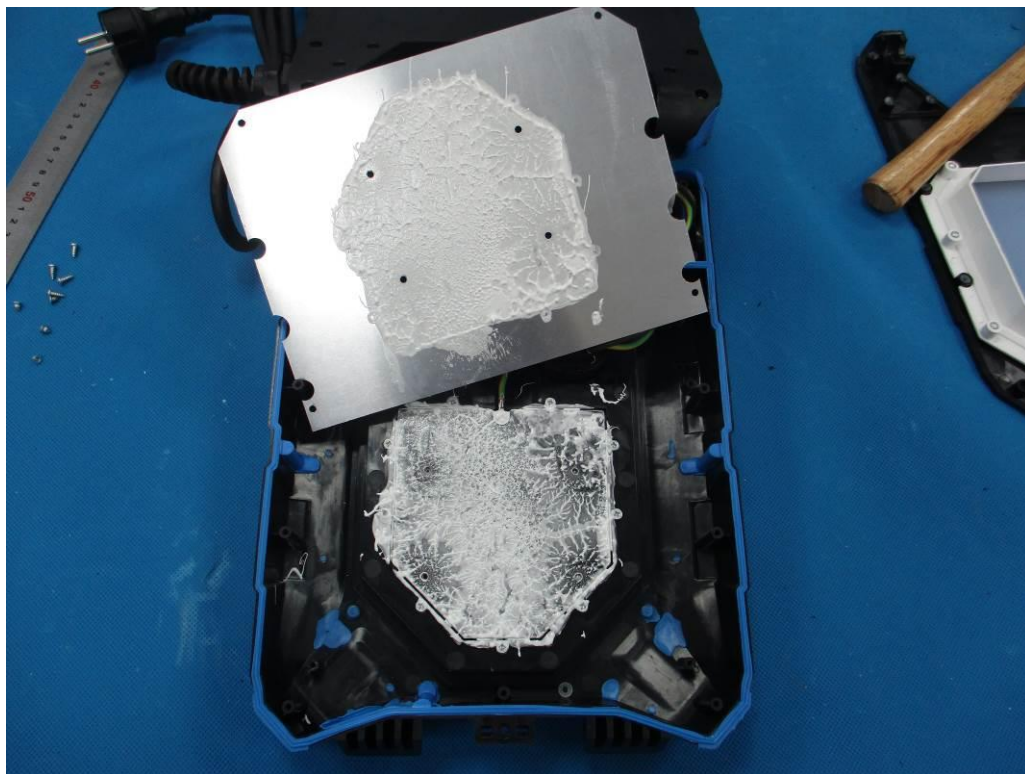


Back view of LED module

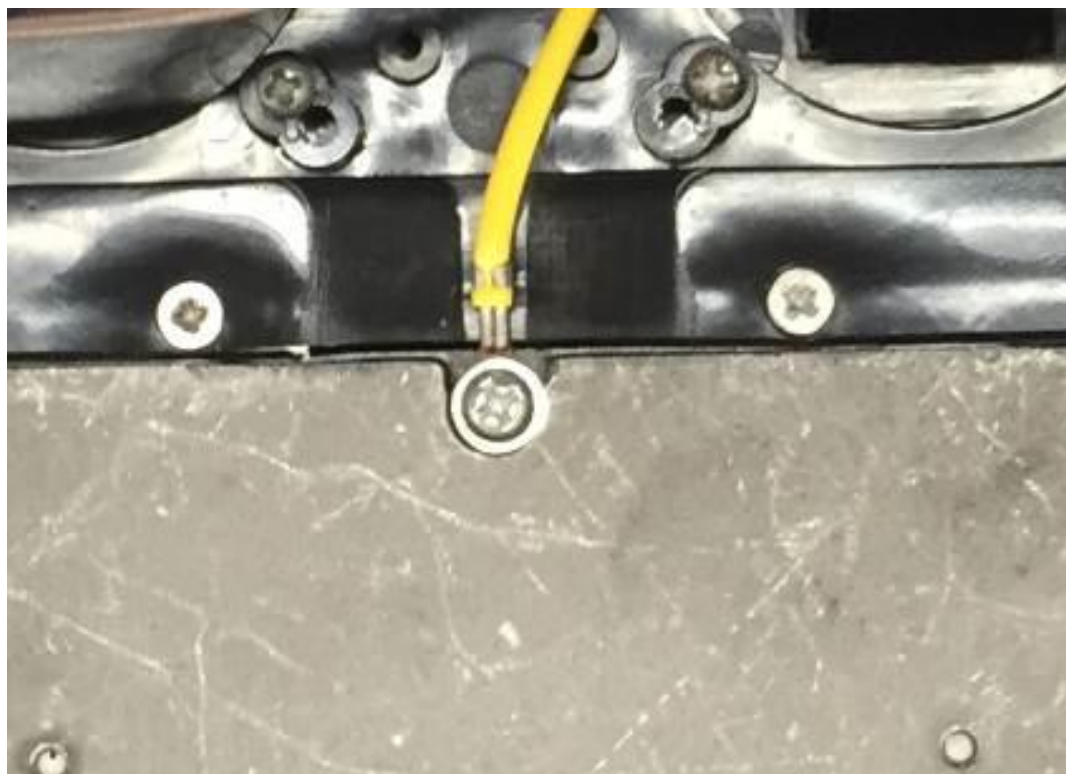


Earth connection

Appendix 4 - Photographs

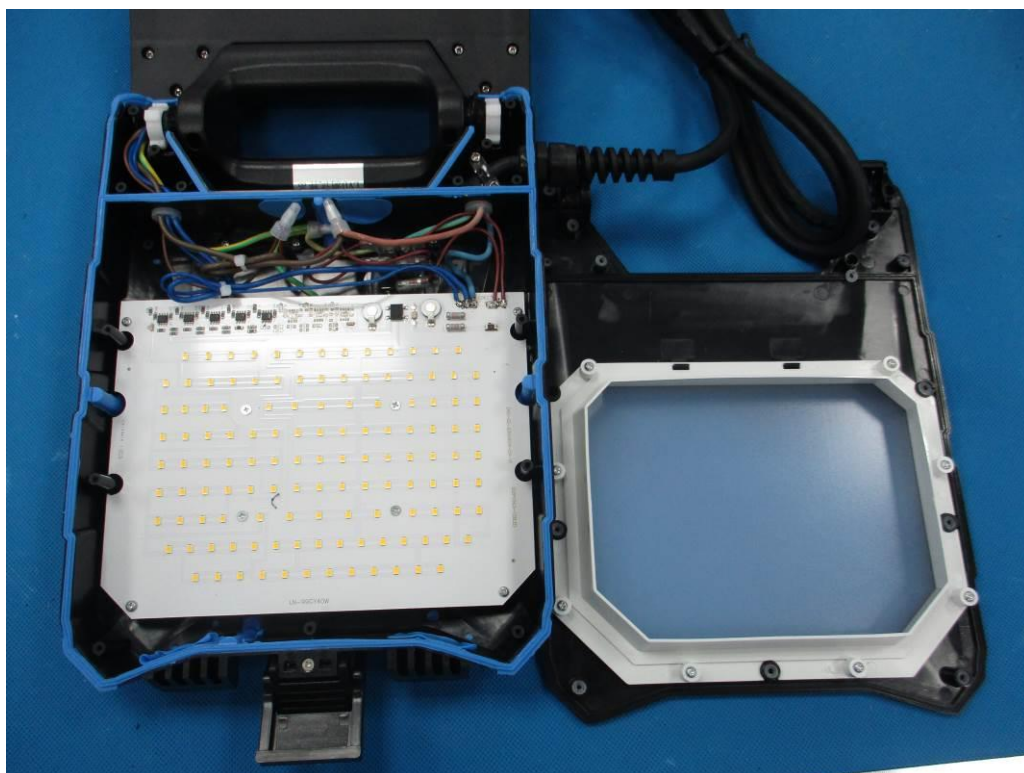


Open view for switch side

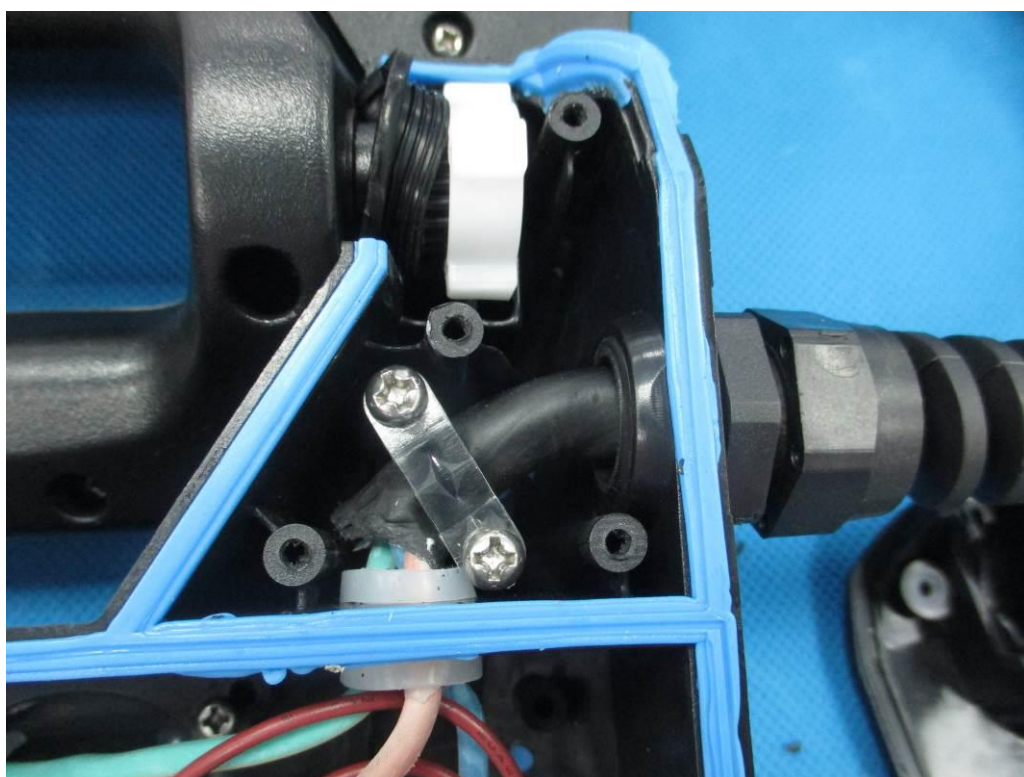


Cord anchorage

Appendix 4 - Photographs

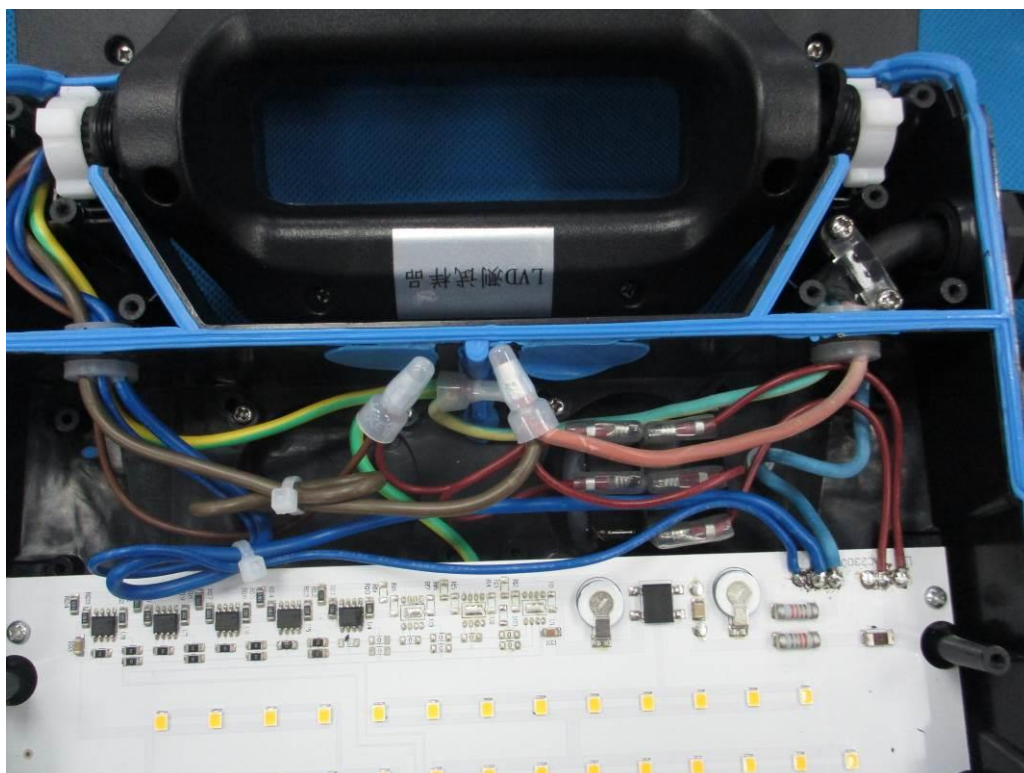

Internal wire

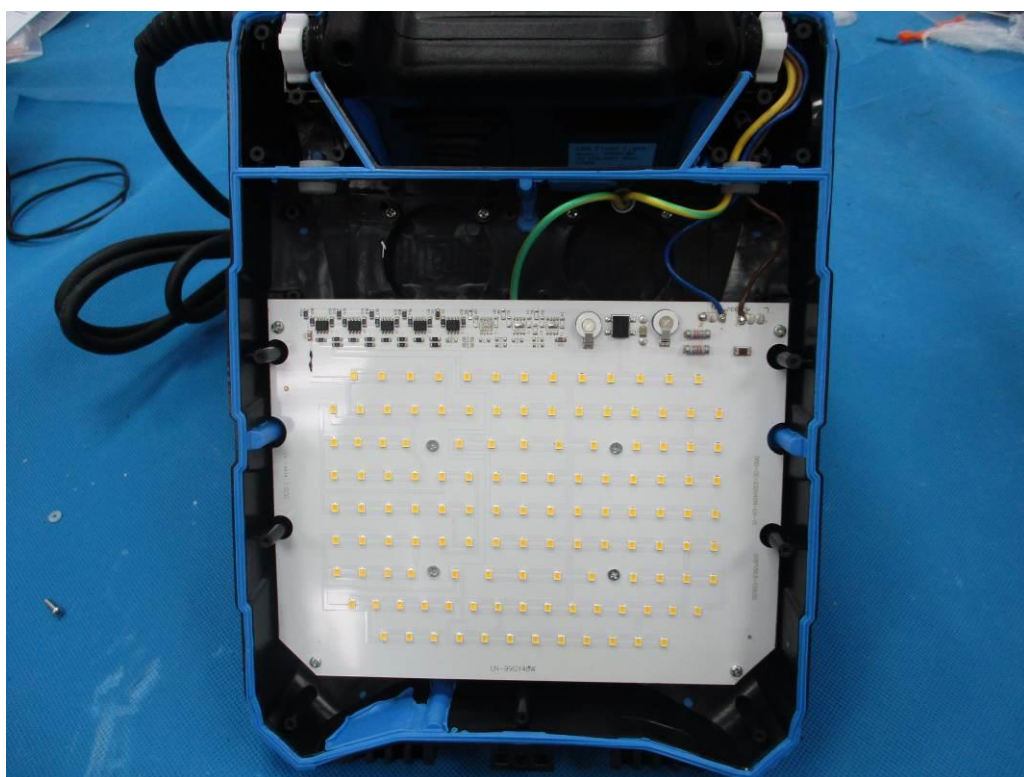

Open view for without socket view