

## EVEREADY 1209

## 6V


Lantern



### General Information

|                         |                                                                              |
|-------------------------|------------------------------------------------------------------------------|
| <b>Classification:</b>  | Carbon Zinc Super Heavy Duty                                                 |
| <b>Chemical System:</b> | Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> )<br>No added mercury or cadmium |
| <b>Designation:</b>     | ANSI-908A IEC- 4LR25X                                                        |
| <b>Nominal Voltage:</b> | 6.0 volts                                                                    |
| <b>Operating Temp:</b>  | -18°C to 55°C (0°F to 130°F)                                                 |
| <b>Typical Weight:</b>  | 600 grams                                                                    |
| <b>Typical Volume:</b>  | 492 cubic centimeters                                                        |
| <b>Shelf Life</b>       | 3 years at 21°C                                                              |
| <b>Terminal:</b>        | Coil Spring                                                                  |


### Industry Standard Dimensions

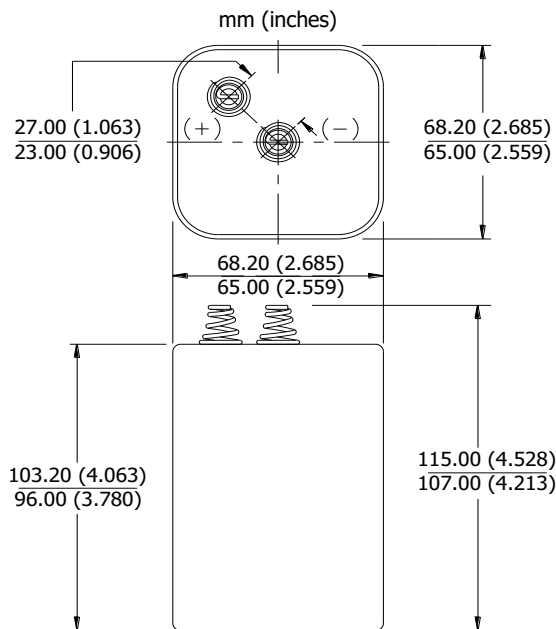

This battery shall pass freely through a cylindrical tube 82.6 diameter x 101.6 long.

### Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

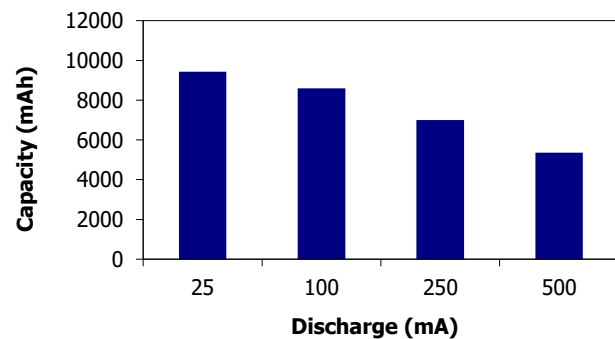


### Industry Standard Tests (21°C)

#### STEADY BURN BARRICADE 110 ohm 12 hrs/day




#### LIGHTING 9.1 ohm 30 min/hour 8 hrs/day

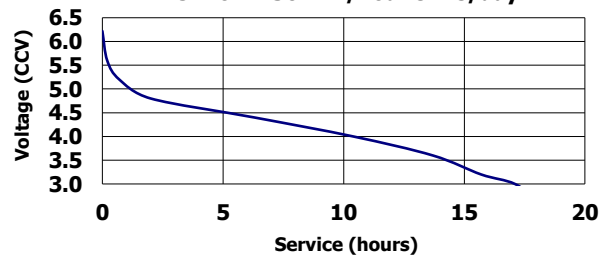

#### LIGHTING

33 ohm 30 min/hour 8 hrs/day

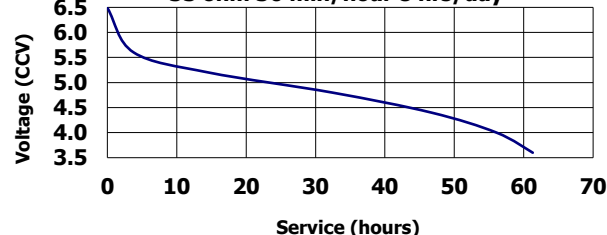

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

**Contents herein do not constitute a warranty and are for reference only.**