


MINI FLASHLIGHT

User Guide

BAREBONES

PRODUCT COMPONENTS

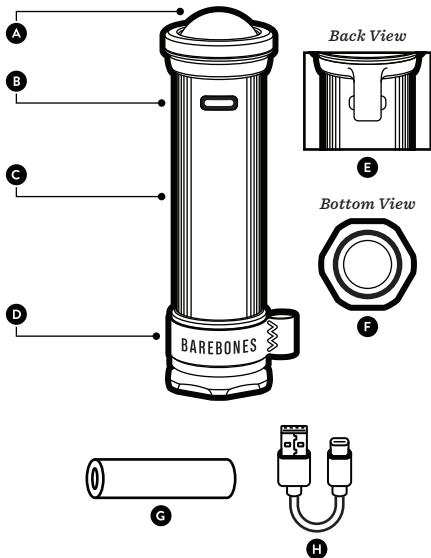

KEY

- | | |
|---|--|
| A Lens | E USB-C Port & Cover |
| B Power Button & Battery Level Indicator | F Magnetic Base & Battery Cap |
| C Body | G Li-ion 18650 2600mAh
<i>Included</i> |
| D Poly Strap & Hang Loop | H USB-A to USB-C Cable
<i>Included</i> |

**The Mini Flashlight arrives in demo mode.*

To exit demo mode, simply charge the flashlight via the USB-C port or press and hold the power button for 8-10 seconds.

OPERATING INSTRUCTIONS

For optimal performance, charge the battery fully before first use.

LIGHT SETTINGS

Press the power button to cycle through settings.

CLICK	SETTING
1	High
2	Low
3	Power Off

OPERATING INSTRUCTIONS

MANUAL BRIGHTNESS ADJUSTMENT

1. While the flashlight is ON, press and hold the power button to gradually increase or decrease brightness.
2. Release the power button at the desired level.

CANDLE FLICKER MODE

With the light OFF, press and release the power button 3 times and press and hold the button a fourth time for approximately 3 seconds.

The flashlight will enter Candle Flicker mode.

To exit, press the button again.





BATTERY INSTALLATION

1. Turn battery cap counterclockwise to open battery slot.
2. Insert Li-ion battery into battery slot with terminal end first.
3. Reattach battery cap by turning clockwise.
**Do not cross threads.*
**Tighten securely to complete +/- connection.*

BATTERY LEVEL INDICATOR (BLI)

Battery Level Indicator (BLI) is located within the power button.

- When powering off, BLI light will quickly flash indicating remaining battery power.





FLASHES	POWER LEVEL
	75% - 100%
	50% - 74%
	25% - 49%
	Less than 24%

- If the flashlight doesn't turn on or BLI light flashes red then off, battery power level is too low and must be recharged.

CHARGING INSTRUCTIONS

With Li-ion battery installed, plug USB-C charging cable into the Mini Flashlight's USB-C port and other end into external power source to begin charging.

BLI light will flash in a sequence corresponding with the battery level with approximately 2 seconds between each sequence.

FLASHES	POWER LEVEL
SOLID	100%
	75% - 99%
	50% - 74%
	25% - 49%
	Less than 24%

HOW DO I CLEAN THE LIGHT?

Use a slightly damp cloth to wipe down the Mini Flashlight carefully. Do not use any chemical cleaners.

WILL THE RECHARGEABLE BATTERY EXPIRE?

Yes, all batteries will eventually expire and stop receiving a charge.

Barebones Li-ion batteries are available for purchase at barebonesliving.com. Using batteries other than Barebones Li-ion batteries will void the product warranty.

Li-ion batteries should not go in household garbage or recycling bins. They can cause fires during transport or at landfills and recyclers. Instead, Li-ion batteries should be taken to separate recycling or household hazardous waste collection points.

WILL FINISH CHANGE OVER TIME?

By design, the Mini Flashlight finishes will change and creating a completely unique product. Over time, the patina will slowly age, providing a beautiful, rich and unique finish.

WARNING & SAFETY


Do not submerge the flashlight in liquid.

Keep product and battery out of reach of children.

Do not use or charge in temperatures below 32°F or above 113°F.

The warnings, cautions, and instructions in this manual cannot cover all possible conditions or situations that could occur. Exercise common sense and caution when using this light.

SPECIFICATIONS

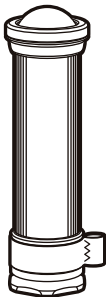

LED	XG2
LUMENS	LOW: 35 HIGH: 150
TEMPERATURE	~3000K
BATTERY	LI-ION 18650 2600mAh
RUN TIME	LOW: 24+ HOURS HIGH: 3+ HOURS
CHARGE TIME	~6 HOURS
INPUT	USB-C 5V 0.5A



RoHS



BAREBONES

For questions or concerns, contact

SUPPORT@BAREBONESLIVING.COM



BAREBONESLIVING.COM

DESIGNED IN UTAH | MADE IN CHINA



Certified



Corporation

