



<p align="center">TEST REPORT EN 62133-2 Secondary cells and batteries containing alkaline or other non-acid electrolytes — Safety requirements for portable sealed secondary cells, and for batteries made from them, use in portable applications – Part 2: Lithium systems</p>		
Test Report No.....:	RDG200106035-SF	
Tested by (+ signature)	Alex Zeng	
Reviewed by (+ signature).....:	David Yang	
Date of issue.....:	2020-04-17	
Testing laboratory.....:	Bay Area Compliance Laboratories Corp. (Dongguan)	
Address	No.69, Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China	
Testing location.....:	1F., No.91, Luyi Road, Tianxin Community, Tangxia Town, Dongguan, Guangdong/523718	
Applicant's name.....:	BAREBONES SYSTEMS, LLC.	
Address.....:	1215 East Wilmington Avenue-Ste. 140 Salt Lake City, UT 84106	
Manufacturer's name.....:	Ningbo Lanqi Electronic Technology CO., LTD.	
Address.....:	NO.1 Building,NO.188-1 Shanhai Road, Wangchun Industrial Zone, Haishu, Ningbo, Zhejiang, China	
Test specification:		
Standard.....:	EN 62133-2:2017	
Test procedure.....:	Type test	
Test item description.....:		
Product designation.....:	Li-ion Battery	
Model/Type reference.....:	ICR18650-4400mAh 3.7V	
Ratings.....:	3.7V, 4400mAh, 16.28Wh	

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Summary of testing:	
Tests performed (name of test and test clause): Test items: cl.5.6.2 Design recommendation; cl.7.1 Charging procedure for test purposes (for Cells and Batteries); cl.7.2.2 Case stress at high ambient temperature (Batteries) cl.7.3.2 External short circuit (Batteries); cl.7.3.3 Free fall (Cells and Batteries); cl.7.3.6 Over-charging of battery; cl.7.3.8 Mechanical tests (batteries); Tests are made with the number of cells and batteries specified in EN 62133-2:2017.	Testing location: Bay Area Compliance Laboratories Corp. (Dongguan) 1F., No.91, Luyi Road, Tianxin Community, Tangxia Town, Dongguan, Guangdong/523718
Summary of compliance with National Differences: N/A	
Copy of marking plate: The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.	
<div style="border: 1px solid black; padding: 10px; margin: 10px auto; width: 60%;"> <p>Li-ion Battery</p> <p>Model: ICR18650-4400mAh 3.7V (1ICR19/66-2)</p> <p>3.7V 4400mAh 16.28Wh</p> <p>Manufacturer: Ningbo Lanqi Electronic Technology CO., LTD.</p> <p>Date: YYYY-MM-DD</p> <p>Made in China</p>  </div>	

Test item particulars	
Classification of installation and use.....	Build-in and use in portable application
Supply connection	N/A
Recommend charging method declared by the manufacturer	CC/CV
Discharge current (0,2 I_t A)	880mA
Specified final voltage.....	2.75V
Upper limit charging voltage per cell.....	4.23V
Maximum charging current.....	2200mA
Charging temperature upper limit.....	45°C
Charging temperature lower limit	0°C
Polymer cell electrolyte type.....	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
Possible test case verdicts:	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement.....	F (Fail)
Testing	
Date of receipt of test item	2020-03-20
Date (s) of performance of tests.....	2020-03-20 to 2020-03-31
General remarks:	
<p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>The information is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.</p> <p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p>	
Throughout this report a point is used as the decimal separator.	


General product information:

This battery is constructed with one cell, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below:

Model	Nominal Capacity	Nominal Voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
ICR18650-4400mAh 3.7V	2200mAh	3.7V	880mA	880mA	2200mA	3000mA	4.2V	2.75V

The principle diagram of the PCM:

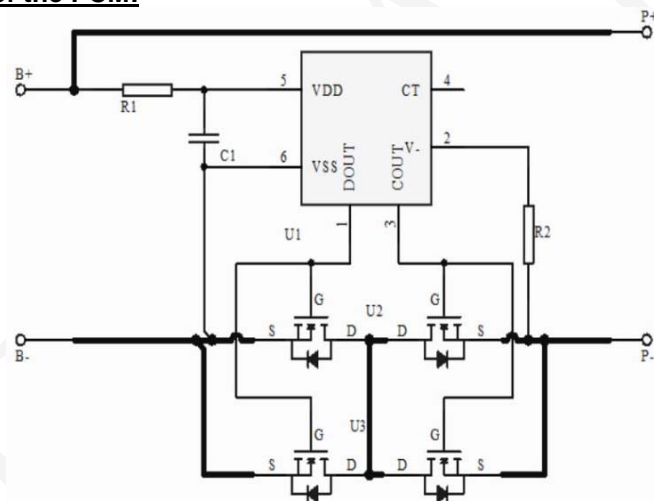

Construction: (Unit: mm)



Battery

D (max.): H (max.)= 20.0mm : 70.0mm

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
4	PARAMETER MEASUREMENT TOLERANCES		P
	Parameter measurement tolerances		P
5	GENERAL SAFETY CONSIDERATIONS		P
5.1	General		P
	Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ) :		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate clearance and creepage distances between conductors		N/A
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	The vents in the side	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		P
5.4	Temperature, voltage and current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented		P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	The voltage and current are within the manufacturer's claim.	P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified	Specifications are provided by Manufacturers.	P
5.5	Terminal contacts		P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current		P
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short-circuit.		P
5.6	Assembly of cells into batteries	1S2P	P
5.6.1	General		P
	Each battery have an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region		P
	This protection may be provided external to the battery such as within the charger or the end devices		P
	If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation		N/A
	If there is more than one battery housed in a single battery case, each battery have protective circuitry that can maintain the cells within their operating regions		N/A
	Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		P
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer		N/A
	Protective circuit components added as appropriate and consideration given to the end-device application		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance		N/A
5.6.2	Design recommendation		P
	For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2		P
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
	For batteries consisting of series-connected cells or cell blocks, nominal charge voltage not be counted as an overcharge protection		N/A
	For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer		N/A
	It is recommended that the cells and cell blocks not discharged beyond the cell manufacturer's specified final voltage	2.75V	P
	For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry incorporated into the battery management system		N/A
5.6.3	Mechanical protection for cells and components of batteries		P
	Mechanical protection for cells, cell connections and control circuits within the battery provided to prevent damage as a result of intended use and reasonably foreseeable misuse.		P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product		P
	The battery case and compartments housing cells designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer		N/A
	For batteries intended for building into a portable end product, testing with the battery installed within the end product considered when conducting mechanical tests		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	The manufacturer has ISO9001:2008 certificate and such quality plan	P
5.8	Battery safety components		P
	According annex F		P
6	TYPE TEST AND SAMPLE SIZE		P
	Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old		P
	Coin cells with resistance $\leq 3 \Omega$ (measured according annex D) are tested according table 1		N/A
	Unless otherwise specified, tests are carried out in an ambient temperature of $20^\circ\text{C} \pm 5^\circ\text{C}$	Tests are carried out at $20^\circ\text{C} \pm 5^\circ\text{C}$.	P
	The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection		P
	When conducting the short-circuit test, consideration given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test	MOSFET	P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
7	SPECIFIC REQUIREMENTS AND TESTS		P
7.1	Charging procedure for test purposes		P
7.1.1	First procedure		P
	This charging procedure applies to subclauses other than those specified in 7.1.2		P
	Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C ± 5 °C, using the method declared by the manufacturer	Charging current: 880mA Charging voltage: 4.20V	P
	Prior to charging, the battery have been discharged at 20 °C ± 5 °C at a constant current of 0,2 It A down to a specified final voltage	Discharging current: 880mA	P
7.1.2	Second procedure		P
	This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9		N/A
	After stabilization for 1 h and 4 h, respectively, at ambient temperature of highest test temperature and lowest test temperature, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05ItA, using a constant voltage charging method.		N/A
7.2	Intended use		P
7.2.1	Continuous charging at constant voltage (cells)		N/A
	Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer		N/A
	Results: No fire. No explosion. No leakage..... :		N/A
7.2.2	Case stress at high ambient temperature (battery)	70°C	P
	Oven temperature (°C)..... :		—
	Results: No physical distortion of the battery case resulting in exposure of internal protective components and cells	No physical distortion of the battery case.	P
7.3	Reasonably foreseeable misuse		P
7.3.1	External short-circuit (cell)		N/A
	The cells were tested until one of the following occurred:		—
	- 24 hours elapsed; or		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	Results: No fire. No explosion..... :		N/A
7.3.2	External short-circuit (battery)		P
	The batteries were tested until one of the following occurred:		—
	- 24 hours elapsed; or		N/A
	- The case temperature declined by 20 % of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P
	A single fault in the discharge protection circuit conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test		P
	A single fault applies to protective component parts such as MOSFET, fuse, thermostat or positive temperature coefficient (PTC) thermistor	MOSFET	P
	Results: No fire. No explosion..... :	(See appended table 7.3.2)	P
7.3.3	Free fall	1.0m	P
	Results: No fire. No explosion	No fire. No explosion.	P
7.3.4	Thermal abuse (cells)		N/A
	Oven temperature (°C)..... :		—
	Results: No fire. No explosion		N/A
7.3.5	Crush (cells)		N/A
	The crushing force was released upon:		—
	- The maximum force of 13 kN ± 0,78 kN has been applied;		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	Results: No fire. No explosion..... :		N/A
7.3.6	Over-charging of battery		P
	The supply voltage which is:		P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- 1.4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries	5.88V	P
	- 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and		N/A
	- Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached	8.80A	P
	Test was continued until the temperature of the outer casing:		P
	- Reached steady state conditions (less than 10 °C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... :	(See appended table 7.3.6)	P
7.3.7	Forced discharge (cells)		N/A
	If the discharge voltage reaches the negative value of upper limit charging voltage within the testing duration, the voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration		N/A
	If the discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration, the test is terminated at the end of the testing duration		N/A
	Results: No fire. No explosion..... :		N/A
7.3.8	Mechanical tests (batteries)		P
7.3.8.1	Vibration		P
	Results: No fire, no explosion, no rupture, no leakage or venting. :	(See appended table 7.3.8.1)	P
7.3.8.2	Mechanical shock		P
	Results: No leakage, no venting, no rupture, no explosion and no fire :	(See appended table 7.3.8.2)	P
7.3.9	Design evaluation – Forced internal short-circuit (cells)		N/A
	The cells complied with national requirement for :	France, Japan, Korea, Switzerland	—
	The pressing was stopped upon:		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	- A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached		N/A
	Results: No fire		N/A
8	INFORMATION FOR SAFETY		P
8.1	General		P
	Manufacturers of secondary cells ensure that information is provided about current, voltage and temperature limits of their products	Information for safety mentioned in manufacturer's specifications.	P
	Manufacturers of batteries ensure that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product	Information for safety mentioned in manufacturer's specifications.	P
	As appropriate, any information relating to hazard avoidance resulting from a system analysis provided to the end user	Information for safety mentioned in manufacturer's specifications.	P
	Do not allow children to replace batteries without adult supervision		P
8.2	Small cell and battery safety information		N/A
	The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:		N/A
	- Keep small cells and batteries which are considered swallowable out of the reach of children		N/A
	- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion		N/A
	- In case of ingestion of a cell or battery, seek medical assistance promptly		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
9	MARKING		P
9.1	Cell marking		N/A
	Cells marked as specified in IEC 61960, except coin cells		N/A
	Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity		N/A
	By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked		N/A
9.2	Battery marking		P
	Batteries marked as specified in IEC 61960, except for coin batteries	Battery marked in accordance with IEC 61960.	P
	Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity. Batteries also marked with an appropriate caution statement		N/A
	Terminals have clear polarity marking on the external surface of the battery		P
	Batteries with keyed external connectors designed for connection to specific end products need not be marked with polarity markings if the design of the external connector prevents reverse polarity connections		P
9.3	Caution for ingestion of small cells and batteries	Non-removable	N/A
	Coin cells and batteries identified as small batteries according to 8.2 include a caution statement regarding the hazards of ingestion in accordance with 8.2		N/A
	When small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion given on the immediate package		N/A
9.4	Other information		P
	Storage and disposal instructions	Information for disposal instructions mentioned in manufacturer's specifications.	P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
	Recommended charging instructions	Information for disposal instructions mentioned in manufacturer's specifications.	P

10	PACKAGING AND TRANSPORT		P
	Packaging for coin cells not small enough to fit within the limits of the ingestion gauge of Figure 3		N/A
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants		P

ANNEX A	CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE		P
A.1	General		P
A.2	Safety of lithium ion secondary battery		P
A.3	Consideration on charging voltage		P
A.3.1	General		P
A.3.2	Upper limit charging voltage		N/A
A.3.2.1	General		N/A
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range		P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature range is 0°C~45°C	P
A.4.3	High temperature range		N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in the high temperature range		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3.4	Safety considerations when specifying a new upper limit in the high temperature range		N/A
A.4.4	Low temperature range		N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in the low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		N/A
A.4.6	Consideration of discharge		N/A
A.4.6.1	General		N/A
A.4.6.2	Final discharge voltage and explanation of safety viewpoint		N/A
A.4.6.3	Discharge current and temperature range		N/A
A.4.6.4	Scope of application of the discharging current		N/A
A.5	Sample preparation		N/A
A.5.1	General		N/A
A.5.2	Insertion procedure for nickel particle to generate internal short		N/A
A.5.3	Disassembly of charged cell		N/A
A.5.4	Shape of nickel particle		N/A
A.5.5	Insertion of nickel particle in cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle in winding core		N/A
A.5.5.2	Marking the position of the nickel particle on both ends of the winding core of the separator		N/A
A.5.6	Insertion of nickel particle in prismatic cell		N/A
A.6	Experimental procedure of the forced internal short-circuit test		N/A
A.6.1	Material and tools for preparation of nickel particle		N/A
A.6.2	Example of a nickel particle preparation procedure		N/A
A.6.3	Positioning (or placement) of a nickel particle		N/A
A.6.4	Damaged separator precaution		N/A
A.6.5	Caution for rewinding separator and electrode		N/A

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict
A.6.6	Insulation film for preventing short-circuit		N/A
A.6.7	Caution when disassembling a cell		N/A
A.6.8	Protective equipment for safety		N/A
A.6.9	Caution in the case of fire during disassembling		N/A
A.6.10	Caution for the disassembling process and pressing the electrode core		N/A
A.6.11	Recommended specifications for the pressing device		N/A
ANNEX B	RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS		P
ANNEX C	RECOMMENDATIONS TO THE END-USERS		N/A
ANNEX D	MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS		N/A
D.1	General		N/A
D.2	Method		N/A
	A sample size of three coin cells is required for this measurement..... :	(See appended table D.2)	N/A
	Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1		N/A
	Coin cells with an internal resistance greater than 3 Ω require no further testing		N/A
ANNEX E	PACKAGING AND TRANSPORT		N/A
ANNEX F	COMPONENT STANDARDS REFERENCES		P

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE: List of Critical Components					P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity ¹⁾
PCB	Shenzhen Sayea Circuit Technology Co., Ltd.	SY-D	V-0, 130°C	UL796	UL E476823
Protection IC (U1)	Japan American company	MM2280HD 1RH	overcharge detection voltage: $4.280 \pm 0.025V$ Overdischarge detection voltage: $2.9 \pm 0.1V$	EN62133-2: 2017	Test appliance
MOSFET (U2,U3)	Developer Microelectronics Co., Ltd.	8205A	VDS:20V; VGS:±8V; ID:5.0A;	EN62133-2: 2017	Test appliance
Cell	Zhuhai Great Power Energy Co., Ltd.	ICR18650-2200	3.7V, 2200mAh, 8.14Wh	EN62133-2: 2017	Test By DEKRA Testing and Certification (Shanghai) Ltd., Guangzhou Branch Report No.: 4343832.50
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict

7.2.1	TABLE: Continuous charging at constant voltage (cells)				N/A
Sample no.	Recommended charging voltage V _c (Vdc)	Recommended charging current I _{rec} (mA)	OCV before test (Vdc)	Results	
Supplementary information: - No fire or explosion - No leakage - Others (please explain)					

7.3.1	TABLE: External short-circuit (cell)					N/A
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature (°C)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						
Supplementary information:						
- No fire or explosion						
- Others (please explain)						

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.2	TABLE: External short-circuit (battery)					P
Sample no.	Ambient T (°C)	OCV before test (Vdc)	Resistance of circuit (mΩ)	Maximum case temperature (°C)	Component single fault condition	Results
B-1	21.0	4.156	87.9	25.8	4.156	P
B-2	21.0	4.153	84.7	25.9	4.153	P
B-3	21.0	4.155	84.7	26.2	4.155	P
B-4	21.0	4.155	84.3	26.4	4.155	P
B-5	21.0	4.154	84.6	25.4	4.154	P
Supplementary information: - No fire or explosion - Others (please explain)						

7.3.5	TABLE: Crush (cells)				N/A
Sample no.	OCV before test (Vdc)	OCV at removal of crushing force (Vdc)	Maximum force applied to the cell during crush (kN)	Results	
Samples charged at charging temperature upper limit					
Samples charged at charging temperature lower limit					
Supplementary information:					
- No fire or explosion					
- Others (please explain)					

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017				
Clause	Requirement + Test		Result - Remark	Verdict
7.3.6	TABLE: Over-charging of battery			P
Constant charging current (A)		8.80	—	
Supply voltage (Vdc)		5.88	—	
Sample no.	OCV before charging (Vdc)	Total charging time (minute)	Maximum outer case temperature (°C)	Results
B-1	3.207	60	36.3	P
B-2	3.208	60	36.1	P
B-3	3.211	60	35.4	P
B-4	3.210	60	36.1	P
B-5	3.208	60	36.2	P
Supplementary information: - No fire or explosion - Others (please explain)				

7.3.7	TABLE: Forced discharge (cells)			N/A
Sample no.	OCV before application of reverse charge (Vdc)	Measured reverse charge I_t (mA)	Lower limit discharge voltage (Vdc)	Results
Supplementary information: - No fire or explosion - Others (please explain)				

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.8.1	TABLE: Vibration					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
B-1	4.156	4.156	90.452	90.452	P	
B-2	4.159	4.159	90.450	90.450	P	
B-3	4.161	4.161	90.454	90.454	P	
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting - Others (please explain)						

7.3.8.2	TABLE: Mechanical shock					P
Sample no.	OCV before test (Vdc)	OCV after test (Vdc)	Mass before test (g)	Mass after test (g)	Results	
B-1	4.154	4.154	90.454	90.454	P	
B-2	4.153	4.153	90.451	90.451	P	
B-3	4.158	4.158	90.454	90.454	P	
Supplementary information: - No fire or explosion - No rupture - No leakage - No venting - Others (please explain)						

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

EN 62133-2: 2017			
Clause	Requirement + Test	Result - Remark	Verdict

7.3.9	TABLE: Forced internal short circuit (cells)					N/A
Sample no.	Chamber ambient T (°C)	OCV before test (Vdc)	Particle location ¹⁾	Maximum applied pressure (N)	Results	
Samples charged at charging temperature upper limit						
Samples charged at charging temperature lower limit						
Supplementary information: ¹⁾ Identify one of the following: 1: Nickel particle inserted between positive and negative (active material) coated area. 2: Nickel particle inserted between positive aluminium foil and negative active material coated area. - No fire or explosion - Others (please explain)						

D.2	TABLE: Internal AC resistance for coin cells				N/A
Sample no.	Ambient T (°C)	Store time (h)	Resistance Rac (Ω)	Results ¹⁾	
--	--	--	--	--	
--	--	--	--	--	
--	--	--	--	--	
Supplementary information: ¹⁾ Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables					

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

List of test equipment used:

Instrument Name	No.	Manufacturer	Calibration Date	Due Date	Equipment status
Battery Crush Tester	T-08-BT002	GAOXIN	2019/06/08	2020/06/07	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
High-Low Temperature short-circuit Tester	T-08-BT004	GAOXIN	2020/03/13	2021/03/12	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Battery Thermal Abuse Tester	T-08-BT005	GAOXIN	2020/03/13	2021/03/12	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Drop Tester	T-08-BT006	GAOXIN	2019/06/08	2020/06/07	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Forced Internal Short Circuit Tester	T-08-BT007	BELL	2019/05/09	2020/05/08	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Battery Charge-Discharge Testing System	T-08-BT010	NEWARE	2020/03/16	2021/03/15	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Electric Vibration Test Machine	T-08-BT012	DONGLING	2019/09/12	2020/09/11	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Hydraulic Shock Test Machine	T-08-BT013	LABTONE	2019/09/12	2020/09/11	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Digital Multimeter	T-08-BT017	FLUKE	2019/05/09	2020/05/08	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Stopwatch	T-08-BT021	LEAP	2019/05/08	2020/05/07	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
High-low Temperature Test Chamber	T-08-BT024	BACL	2020/03/11	2021/03/10	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Multipath temperature tester	T-08-BT025	RONGXIN	2019/07/29	2020/07/28	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Milliohmmeter	T-08-BT026	ViCi	2019/07/23	2020/07/22	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Electronic Balance	T-08-BT027	YINGHENG	2019/09/06	2020/09/05	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Battery Charge-Discharge Testing System	T-08-BT028	NEWARE	2019/10/16	2020/10/15	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
DC Power Supply	T-08-BT031	QJE	2019/04/29	2020/04/28	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
DC Power Supply	T-08-BT032	QJE	2019/04/29	2020/04/28	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Battery Charge-Discharge Testing System	T-08-SF226	NEWARE	2019/06/14	2020/06/13	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Sample Photos

Photo 1

[✓] General view of battery



Photo 2

[✓] General view of battery



Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Photo 3

[✓] **General view of
Battery**



Photo 4

[✓] **General view of
Battery**



Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Photo 5

[✓] General view of PCB


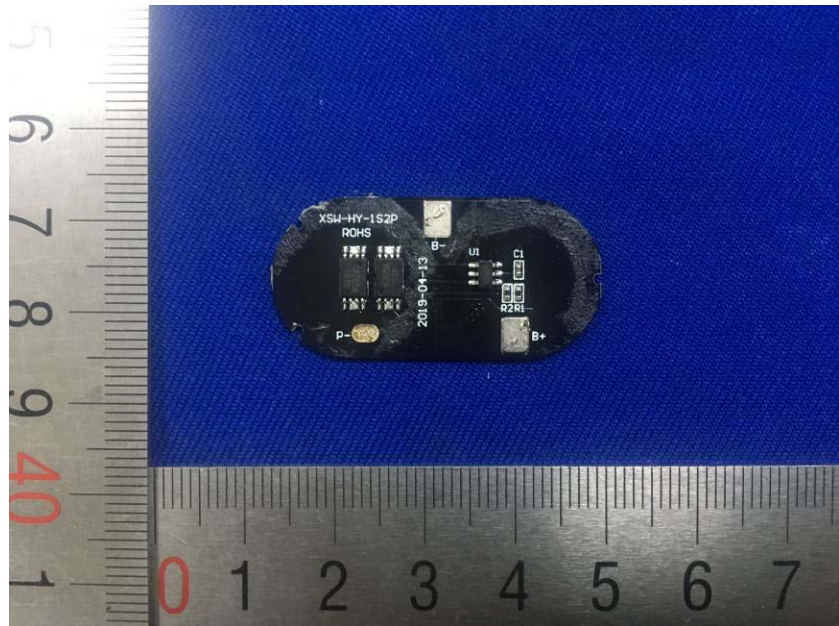


Photo 6

[✓] General view of PCB

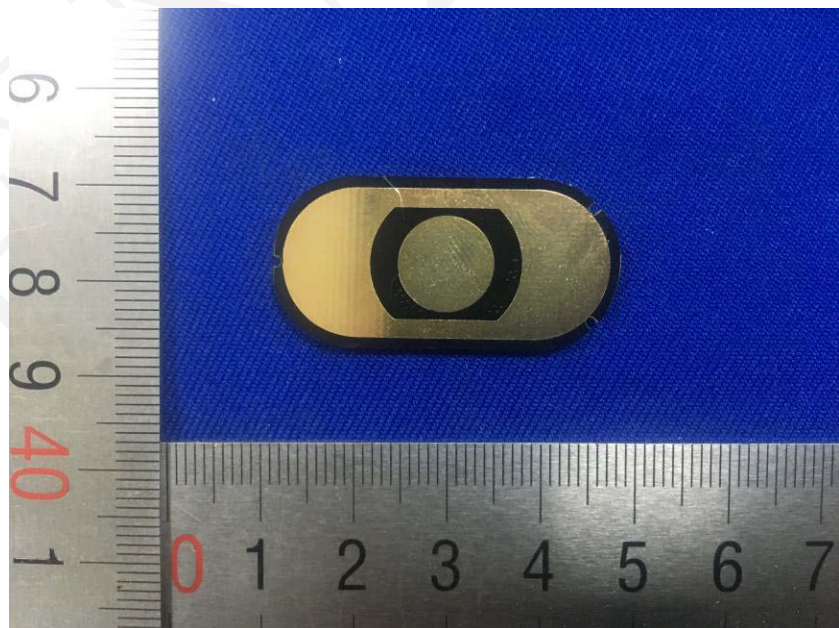

Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Photo 7

[✓] **General view of Cell**



Photo 8

[✓] **General view of Cell**



Note: The test data was only valid for the test sample(s). This test report is prepared for the customer shown above and for the specific product described herein. It must not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

Directions

1. The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

*****END OF REPORT*****